


REV. 1 7/9/92

COIL: @ 25°C	
RESISTANCE	675 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	1.5 VDC

CUSTOMER DATA SHEET

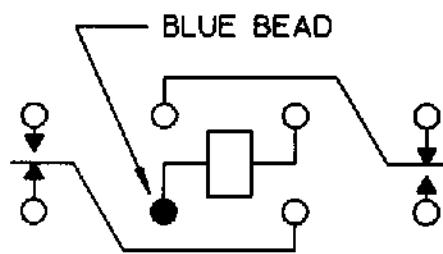

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	100	g's	6 ± 1	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

CONTACT RATING: LOW LEVEL TO 2A
 30 VDC RESISTIVE 1 AMP 30 VDC
 INDUCTIVE 100,000 OPERATIONS MINIMUM

NOTES: _____

DR. R.B. 5/19/92 CK. 7/9/92



CUST. HI-G
 CUST. NO. 2B-2A-126

TYPE 'FW' RELAY

FW1201G04