

REV. 0

DCO 16651


|                 |                  |
|-----------------|------------------|
| COIL: @ 25°C    |                  |
| RESISTANCE      | 9.100 OHMS ± 10% |
| NOMINAL VOLTAGE | 110.0 VDC        |
| MUST OPERATE    | 51.0 VDC         |
| MUST RELEASE    | 5.56 VDC         |

ENVIRONMENT:

|             |     |        |       |              |    |     |
|-------------|-----|--------|-------|--------------|----|-----|
| VIBRATION   | 10  | CPS TO | 2000  | CPS @        | 20 | g's |
| SHOCK       | 100 | g's    | 6 ± 1 | MS. DURATION |    |     |
| TEMPERATURE | -65 | °C TO  | +125  | °C           |    |     |

NOTES:

CUSTOMER DATA SHEET

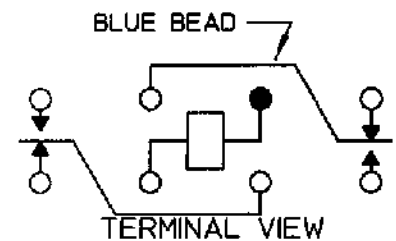

CONTACT RATING: 3 AMPS 28 VDC  
RESISTIVE 100,000 OPERATIONS

DR. PBB 11/30/00

CK. TLG 11-30-00

**CII Technologies™**  
advanced control electronic solutions

CUST. C. I. I. STD.  
CUST. NO. \_\_\_\_\_ REV. \_\_\_\_\_

"FW" RELAY

FW1220R00