


REV. 0

DCO 16930

COIL: @ 25°C	600 OHMS ±10%
RESISTANCE	
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.5 VDC MAX., 2.7 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 30 g's
SHOCK	90 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE 5 MS MAX
	RELEASE 4 MS MAX
	BOUNCE 2.5 MS MAX
	DIELECTRIC 1000 VAC (700 VAC ACROSS CONTACTS)

CUSTOMER DATA SHEET

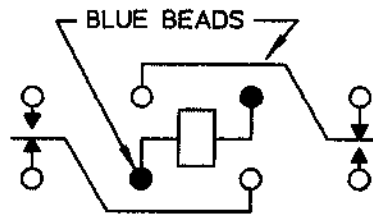

TERMINAL VIEW

CONTACT RATING: 5A 28 VDC RESISTIVE
2 AMP 28 VDC INDUCTIVE
100,000 OPERATIONS

DR. B.D. 4/6/01 CK. TLG 04-09-01

ICM Technologies
advanced control electronic solutions

CUST. GENICOM
CUST. NO. 3SBK5004H1 REV.

FW5A RELAY

FW5A1201S11

NOT the LATEST REVISION