

# **SPECIFICATION**

Part No.	:	FXP29.07.0070A
Product Name	:	2100MHz 3G UMTS/HSPA+ Band Flexible PCB Antenna
Features	:	1920-2170MHz Operation Ground Plane Independent 1.5 dBi Peak Gain 12.7*8.4*0.24 mm Tiny dimension IPEX MHFI (U.FL Compatible)

**RoHS** Compliant

Photo:





## **1. Introduction**

The FXP29 is a unique super small monopole ultra-low profile antenna for the 2100MHz 3G UMTS/ HSPA+ application band. The FXP29 antenna has peak gain of 1.5dBi and efficiencies of 45%.

It is made from poly-flexible material, has a tiny form factor (12.7mm\*8.4mm\*0.24mm) and has double-sided 3M tape for easy "peel and stick" mounting onto the inner plastic housing of a device. It is an ideal solution for compact M2M devices which require 3G functionality at the 2100MHz band.

The cables length and connector are customizable. The standard length is 70mm and is recommended, some detuning and efficiency decrease is observed on other cable lengths, see chart below for details.



# 2. Specification


	ELECTRICAL				
	2100MHz UMTS/HSPA				
Frequency (MHz)	1920~2170				
Max Return Loss (dB)	-10				
Peak Gain (dBi)	1.5				
Efficiency (%)	45				
Average Gain (dB)	-3.5				
Radiation Properties	Omni-directional				
Max Input Power (Watts)	5				
Polarization	Linear				
Impedance (Ohms)	50 Ohms				
MECHANICAL					
Dimensions (mm)	12.7*8.4*0.24 mm				
Material	Flexible Polymer				
Connector and Cable	IPEX MHF1 (U.FL) and 1.13 mm mini coax.				
Weight(1pc)	0.42g				
ENVIRONMENTAL RATINGS					
Operation Temperature	-40°C to 85°C				
Storage Temperature	-40°C to 85°C				
Relative Humidity	40% to 95%				
RoHs Compliant	Yes				
All recults were measured with	70mm longth 1 12mm copyial cable and on 2				

\*All results were measured with 70mm length 1.13mm coaxial cable and on 2mm thickness ABS base.




# **3. Antenna Characteristics**


### 3.1 Return Loss

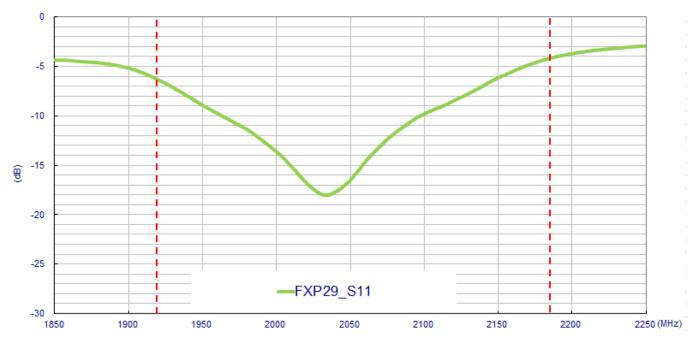

#### 3.2 Peak Gain

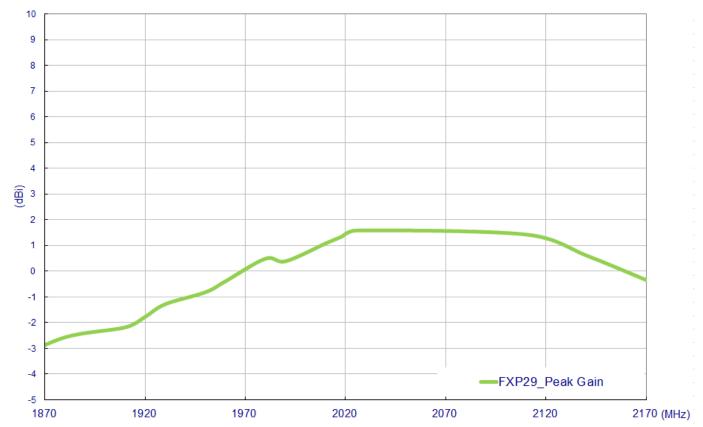




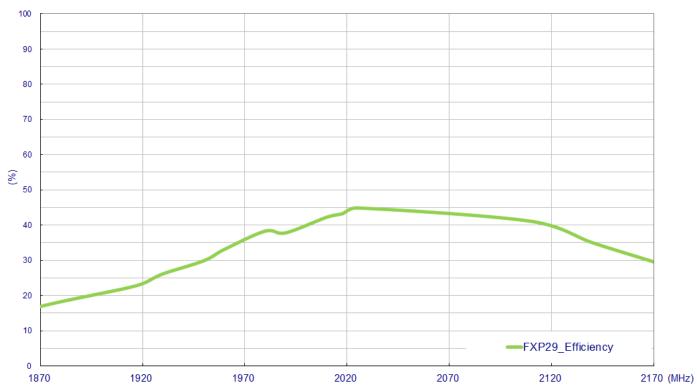

#### **3.3 Efficiency**



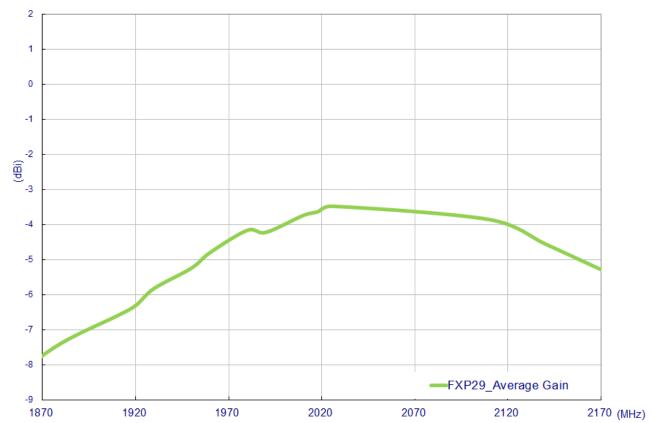




# **4. Antenna Radiation Patterns**


#### 4.1 Antenna setup

The antenna radiation pattern measured setup as shown the below,

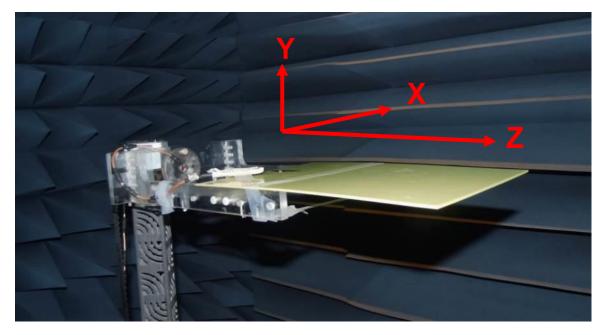





### **4.2 Antenna radiation patterns** XY-Plane X

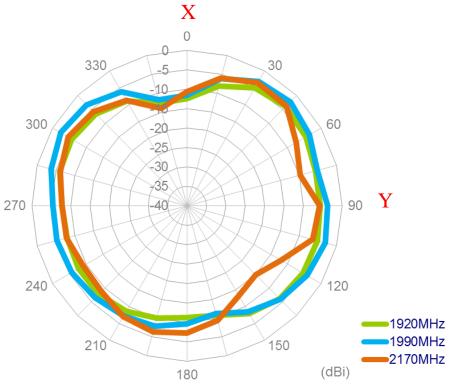

**XZ-Plane** 

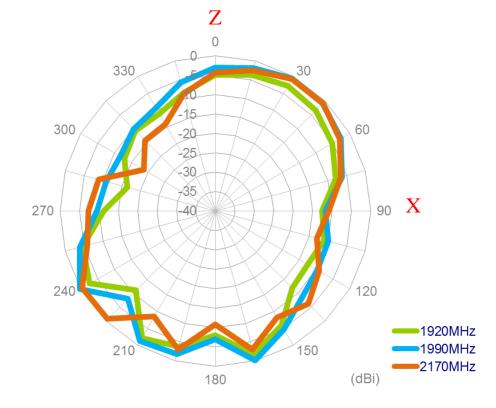




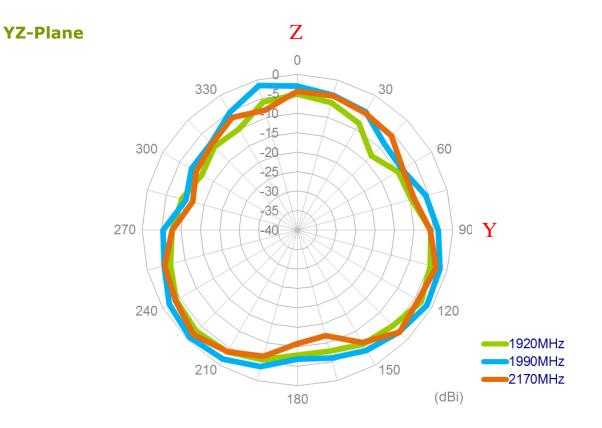



### **5. DRAWING**

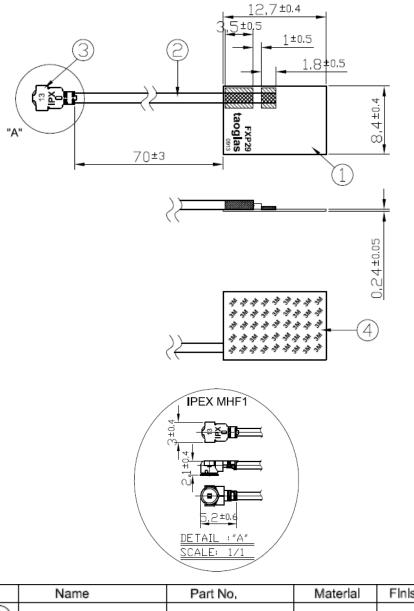


	Name	Part No.	Materlal	Finish	QTY
1	FXP29 FPCB	100113E010011A	FPCB 0.15t	Black	1
2	1.13 Coaxlal Cable	300213A000013A	FEP	Black	1
3	IPEX MHF1	204113G000013A	Brass	Gold	1
4	Double-Sided Adhesive	100113E010011A	3M 467	Brown Liner	1





## **6.** Application Note

The FXP.29 antenna measured with difference cable length on plastic plate of 3 mm thickness, the performance is shown as below,

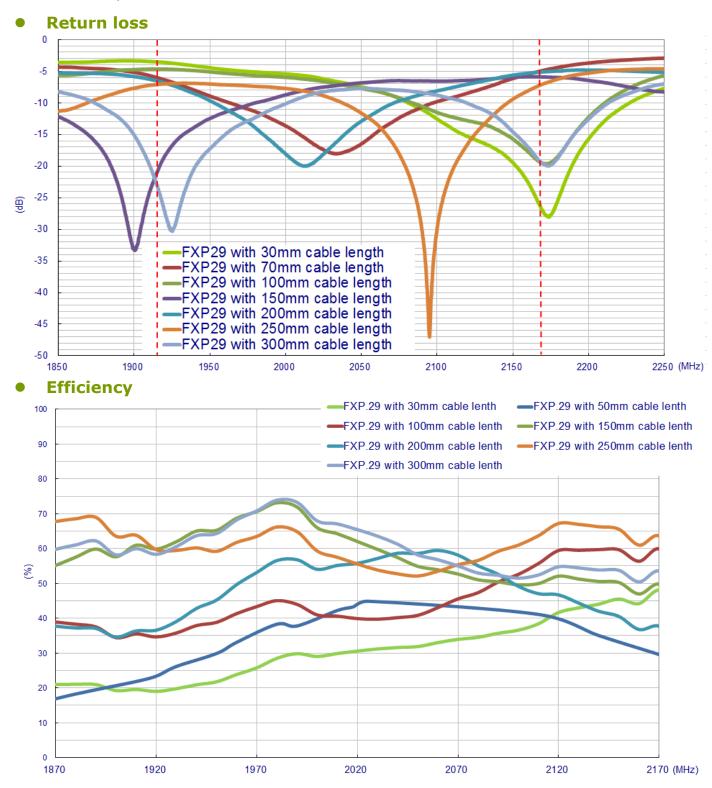



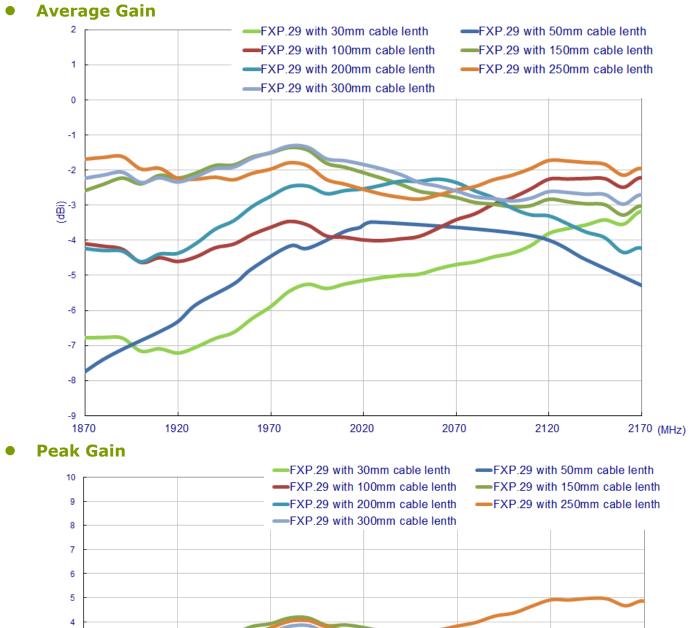

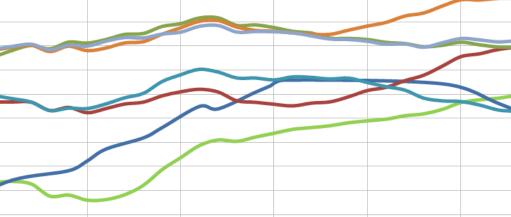

2020

1970

(iiiip) 3 2 1 0 -1 -2 -3 -4 -5

1870

1920

2120


2170 (MHz)

2070



## 7. Packaging

100pcs antenna per small PE Bag Weight 100 pcs: 0.45Kg

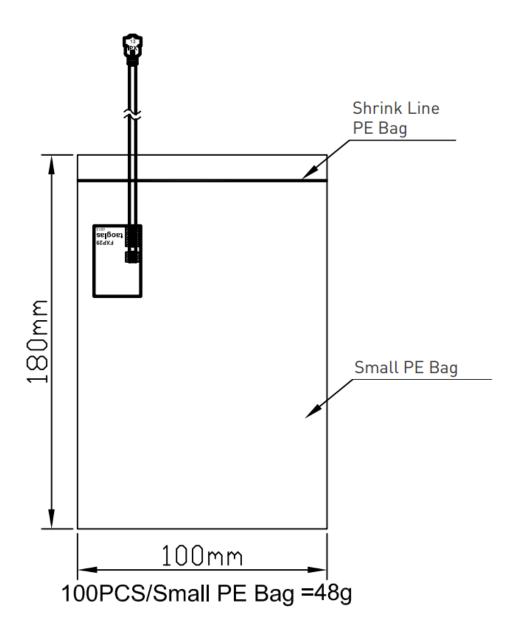



Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.