


**Size: (40 x 40 x 20 mm)**  
**1.57 x 1.57 x 0.79 inches**

- Low noise design
- Fits 1U height racks
- 5, 12, 24 VDC models, thermal protection type
- PBT UL94V-0 frame and impeller
- Ribbed style frame
- Optional tachometer output signal
- Bearing options: ball bearing or sleeve bearing

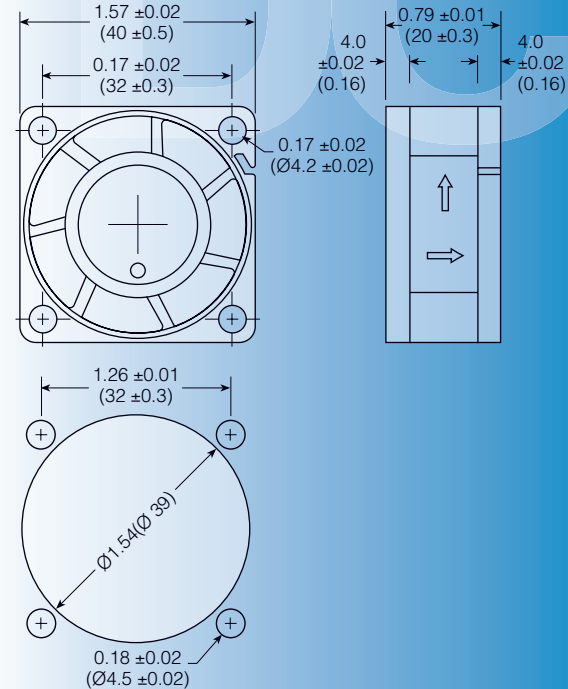

Model No.	Rated Voltage (V)	Current (mA)			Revolution (RPM)	Air Volume		Max Static Pressure (H <sub>2</sub> O)		Sound Noise (dBA)	Weight (g)
		5	12	24		M <sup>3</sup> /Min	CFM	MM	INCH		
G4020 S	5/12	120	50	-	4,000	0.18	6.00	1.74	0.07	21	28
G4020 L	5/12	160	70	-	5,000	0.22	8.00	2.66	0.11	23	28
G4020 M	5/12/24	220	95	65	6,000	0.26	9.00	3.75	0.15	26	28
G4020 H	5/12/24	300	130	80	7,000	0.31	11.00	4.98	0.20	29	28
G4020 E	5/12/24	440	160	110	8,000	0.33	11.70	5.81	0.23	32	28