

*GAX Series Gang  
Jacks Right Angle and*

**Features**    

- Available in 6 and 8 Position Housings
- Available in Both Right Angle and Top Entry Versions
- Ribbed Pin Guides
- Metal Locking Brackets
- UL Recognized File No. E134345
- CSA/NRTL Certified File No. LR78160

**Performance Specifications**

**Materials and Finish**

**Housing Material**

Thermoplastic, UL 94V-0 Rated, Gray Color

**Contact Material**

Phosphor Bronze

**Electrical Characteristics**

**Insulation Resistance**

500 Megohms Min

**Dielectric Withstanding Voltage**

1000V AC RMS for 1 Minute

**Contact Resistance**

20 Milliohms Max

**Current Rating**

1.5 Amps


**MODULAR JACKS AND PLUGS**

**GAX Series**

**Documentation & Ordering Information**


**Kycon Part #**

**Part Number Builder**

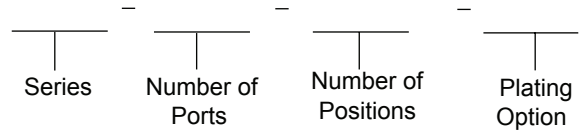

**Series**

GAX - Right Angle P.C.B. Mount

**Number of Ports, Positions & Contacts**

No. of Port	Number of Positions & Contacts					
	62 <sup>50</sup>	64 <sup>50</sup>	66	86	88	-
2	62 <sup>50</sup>	64 <sup>50</sup>	66	86	88	-
3	62	64	66	86	88	-
4	62 <sup>50</sup> <sub>B</sub>	64	66	86	88	88K
5	62	64	66	-	-	-
6	62	64	66	-	-	-
7	62	64	66	-	-	-
8	62 <sup>50</sup>	64	66	-	-	-

50 - Available as Black, 50µ" Gold Plating

B - Available as Black, Standard plating

K - Key Option

**Plating Option**

Standard - Nickel Plating

50 - 50µ" Gold Plating

[Click here for GAX Part # list](#)