

**GDCX-P Series**  
*Vertical Through Hole*

**Features**

- Available in 4, 6, and 8 position housings
- Vertical Mount
- Through Hole Contacts
- CSA certified File No. LR 78160



**Performance Specifications**

**Materials and Finish**

**Housing Material**

PBT Thermoplastic, UL 94V-0 Rated, Black Color

**Contact Material**

Phosphor Bronze

**Electrical Characteristics**

**Insulation Resistance**

500 Megohms Min.

**Dielectric Withstanding Voltage**

1000V rms, 60Hz

**Contact Resistance**

20 milliohms Max.

**Voltage Rating**

125V DC

**Current Rating**

1.5A

**Operating Temperature**

-40°C to +85°C

**Durability Rating**

500 Mating Cycles Min.


**MODULAR JACKS AND PLUGS**

**GDCX-P Series**

**Documentation & Ordering Information**


**Kycon Part #**

**Part Number Builder**

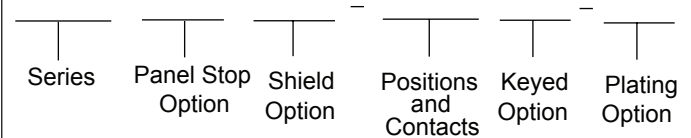

**Series**

GDCX-P - Perpendicular Through Hole Modular Jacks

**Panel Stop**

A - With Panel Stops

N - Without Panel Stops

**Shield Options**

Blank - Non-Shielded

S - Shielded (Available only with 8 Positions)

**Number of Positions/Contacts**

44 - 4 Positions/ 4 Contacts

62 - 6 Positions/ 2 Contacts

64 - 6 Positions/ 4 Contacts

66 - 6 Positions/ 6 Contacts

88 - 8 Positions/ 8 Contacts

**Keyed Option**

Blank - Not Keyed

K - Keyed (only for 8P8C)

**Plating Option**

Blank - Gold Flash

50 - 50µ" Gold Plating

Contact Kycon for other options.

**GDCX-Px-88**

Dimensions in mm

