

GLX Series Right Angle Modular Jack

Features



- 0.570" Height
- Snap-In Board Retention Tabs
- Available in 4, 6, 8 and 10 Position Housings
- UL Recognized File No. E134345
- CSA/NRTL Certified File No. LR78160

Performance Specifications

Materials and Finish

Housing Material

PBT Thermoplastic, UL 94V-0 Rated, Gray Color

Contact Material

Phosphor Bronze

Electrical Characteristics

Insulation Resistance

500 Megohms Min

Dielectric Withstanding Voltage

1000V AC for 1 Minute

Contact Resistance

20 Milliohms Max

Current Rating

1.5 Amps


MODULAR JACKS AND PLUGS

GLX Series

Documentation & Ordering Information

Kycon Part

Part Number Builder

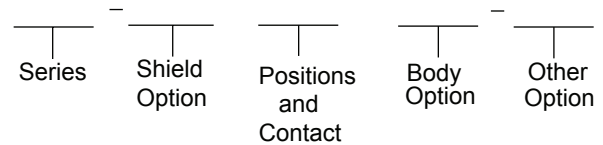

Series

GLX - Right Angle Modular Jack

Shield Option, Body Option,

Number of Positions and Contacts Option

A		N		S		S1	
Non - Shielded with Panel Stops		Non - Shielded w/out Panel Stops		Shielded w/out Panel Stops		Shielded w/Top Panel Stops	
Blank Standard Body	M Short Body	Blank Standard Body	M Short Body	Blank Standard Body	M Short Body	Blank Standard Body	M Short Body
44	—	44	44	—	—	—	—
62	—	62	62	—	—	—	62
64	—	64	64	—	—	—	64
66	—	66	66	—	—	—	66
—	—	—	88	—	88	—	88
—	—	—	1010	—	1010	—	1010

Other Option

Plating Option: Blank - Gold Flash
15 - 15µ" Gold Plating
50 - 50µ" Gold Plating

Color Option : Standard - Gray
BLK - Black

GLX Series Dimensions

Dimensions in mm

