

Feed-through header - GMSTBO 2,5 HV/ 3-GL-7,25 THR - 2199663

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PCB headers, number of positions: 3, pitch: 7.25 mm

Your advantages

- ✔ Suitable for ME/ME MAX electronics housing
- ✔ Orthogonal screw/plug-in connection
- ✔ Delivery form: box packaging in bulk or tape-on-reel packing for automated mounting
- ✔ 7.25 mm pitch for unlimited 600 V UL approval
- ✔ THR solderable

Key Commercial Data

Packing unit	1 pc
Minimum order quantity	50 pc
GTIN	 4 046356 495295
GTIN	4046356495295
Weight per Piece (excluding packing)	3.600 g
Custom tariff number	85366930
Country of origin	Poland

Technical data

Dimensions

Pitch	7.25 mm
Dimension a	14.5 mm
Pin spacing	7.25 mm

General

Feed-through header - GMSTBO 2,5 HV/ 3-GL-7,25 THR - 2199663

Technical data

General

Range of articles	GMSTBO 2,5 HV
Insulating material group	IIIa
Rated surge voltage (III/3)	6 kV
Rated surge voltage (III/2)	6 kV
Rated surge voltage (II/2)	6 kV
Rated voltage (III/3)	400 V
Rated voltage (III/2)	630 V
Rated voltage (II/2)	630 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	16 A
Maximum load current	16 A
Insulating material	LCP
Flammability rating according to UL 94	V0
Number of positions	3

Standards and Regulations

Connection in acc. with standard	EN-VDE
	CUL
Flammability rating according to UL 94	V0


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings


Feed-through header - GMSTBO 2,5 HV/ 3-GL-7,25 THR - 2199663

Drilling diagram

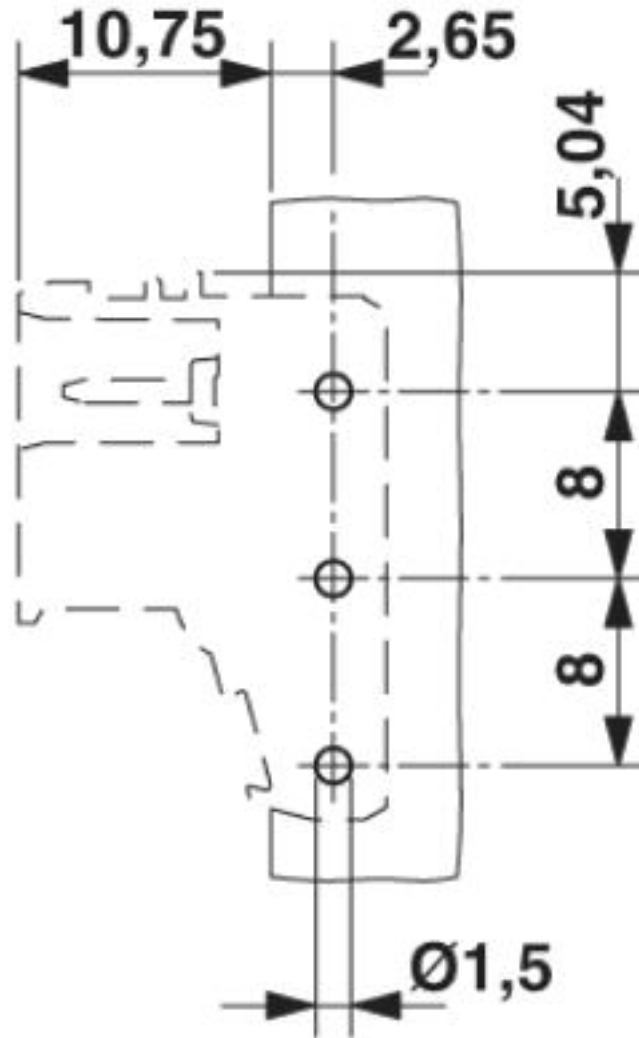

Feed-through header - GMSTBO 2,5 HV/ 3-GL-7,25 THR - 2199663

Diagram

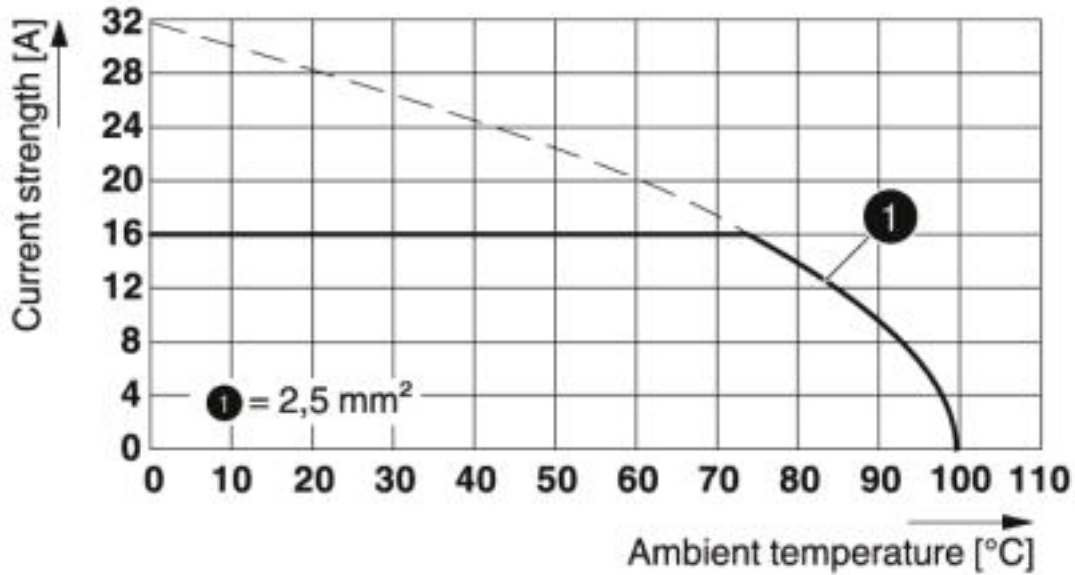

Type: GMSTBT 2,5 HV/...-ST-7,25 GY7035 with GMSTBO 2,5 HV/...-GR(L)-7,25 THR

Classifications

eCl@ss

eCl@ss 4.0	27260700
eCl@ss 4.1	27260700
eCl@ss 5.0	27260700
eCl@ss 5.1	27260700
eCl@ss 6.0	27260700
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002637
ETIM 6.0	EC002637
ETIM 7.0	EC002637

UNSPSC

UNSPSC 6.01	31261501
-------------	----------

Feed-through header - GMSTBO 2,5 HV/ 3-GL-7,25 THR - 2199663

Classifications

UNSPSC

UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	39121409

Approvals

Approvals


Approvals


CCA / IECCE CB Scheme / VDE Gutachten mit Fertigungsüberwachung / EAC / cULus Recognized

Ex Approvals

Approval details

CCA	CCA/DE1 34305/A1
Nominal voltage UN	630 V
Nominal current IN	16 A

IECEE CB Scheme		http://www.iecee.org/	DE1-52506/A1
Nominal voltage UN	630 V		
Nominal current IN	16 A		

VDE Gutachten mit Fertigungsüberwachung		http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx	40037875
Nominal voltage UN	630 V		
Nominal current IN	16 A		

Feed-through header - GMSTBO 2,5 HV/ 3-GL-7,25 THR - 2199663

Approvals

EAC		B.01742
-----	---	---------

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E60425-19931013
------------------	---	---	-----------------

	B	C	D
Nominal voltage UN	300 V	150 V	300 V
Nominal current IN	16 A	16 A	10 A