

GR SERIES

RELAY SOCKETS



DESCRIPTION

8 Pin Midget Sockets

ELECTRICAL RATING

- 300 Volts, 10 Amps
- 150 Volts, 15 Amps

CONSTRUCTION

- Contacts** • Brass, Nickel Plated
- Screws** • Binder Head, 6 - 32 x 1/4" Steel, Zinc Plated
- Pressure Clamp, 6- 32 x 5/16" Steel, Zinc Plated, Wire Range #12 - #22 Solid or Stranded
- Molding** • Break Resistant Thermoplastic Black Standard, Grey Available

AGENCY APPROVALS

- UL recognized, File No. E60008
- CSA certified, File No. LR29513
- CE



ORDERING CODE

PART NO.

GR108
GR108-PC

DESCRIPTION

DPDT, 8 Pin Midget
DPDT, 8 Pin Midget

TERMINAL TYPE

Binder Head Screws
Pressure Clamp Screws

ACCESSORIES

PART NO.


HDB-4

DESCRIPTION (Refer to the accessories pages 25-27))


Hold Down Spring



CUSTOM CONNECTOR

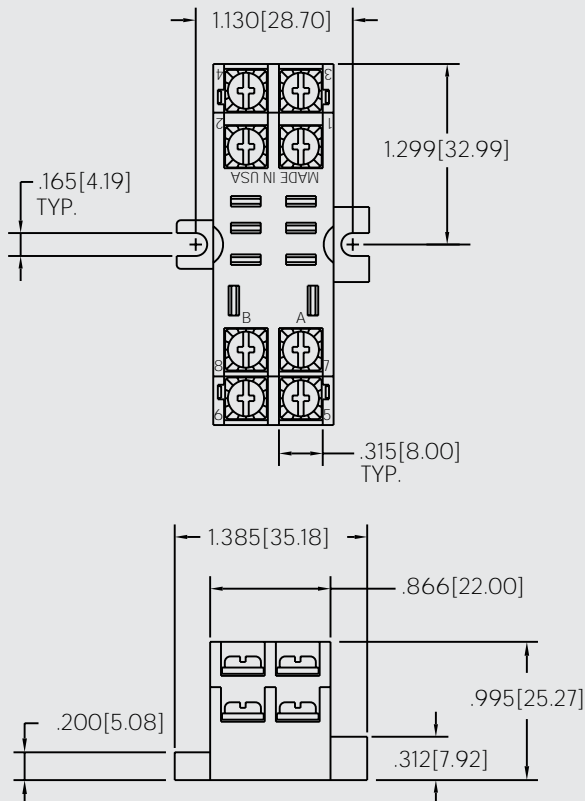


TERMINAL LOCATION

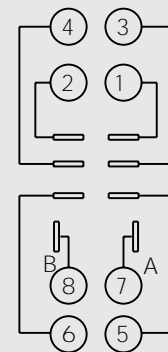

TOP VIEW

GR SERIES

RELAY SOCKETS

DESCRIPTION	5 and 8 Pin Midget Sockets	
ELECTRICAL RATING	• 300 Volts, 10 Amps	
CONSTRUCTION	Contacts	• Brass, Bright Tin Plated
	Molding	• Break Resistant Thermoplastic
AGENCY APPROVALS	• UL recognized, File No. E60008	
	• CSA certified, File No. LR29513	
	• CE	

ORDERING CODE

PART NO.	DESCRIPTION	TERMINAL TYPE
GR105-PCB	SPDT, 5 Pin Midget (Fig. 1)	PC Board
GR105-SLD	SPDT, 5 Pin Midget (Fig. 2)	Solder
GR108-PCB	DPDT, 8 Pin Midget (Fig. 1)	PC Board
GR108-SLD	DPDT, 8 Pin Midget (Fig. 2)	Solder

ACCESSORIES

PART NO.	DESCRIPTION (Refer to the accessories pages 25-27)
HDB-4	Hold Down Spring
HDB-9	Hold Down Spring



CUSTOM CONNECTOR

