



Fair-Surface type with no protrusion of snap or hinge parts


Feature

- Split cores with plastic housing for easy installation on wired cables and cables with connectors.
- Cable tie fixture enables assistance of wire bundling and fixing on harness. (Except GRFC-3/4, RFC-H13, RFC-20)
- Harness guide provides easy harness winding and prevents pinching.

Material

- Ferrite Core: Soft ferrite
- Housing: PA66 (Color: Light gray / Flammability: UL94V-0)

Unit: mm

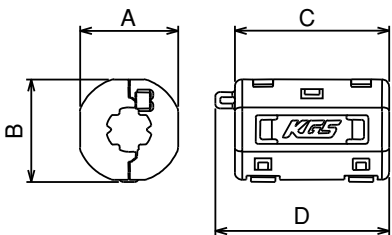

Part No.	A	B	C	D	Applicable cable diameter	Impedance* Ω/100MHz (1 turn)
GRFC-3	13.7	13.5	18.0	—	φ 2.5~3.5	≧ 35
GRFC-4	13.7	13.5	27.5	—	φ 3.5~4.5	≧ 75
GRFC-5	18.1	18.4	31.5	35.5	φ 4.5~5.5	≧ 100
GRFC-6	18.1	18.4	31.5	35.5	φ 5.5~6.5	≧ 100
GRFC-8	20.1	20.4	31.5	35.5	φ 7.5~8.5	≧ 75
GRFC-9	20.1	20.4	31.5	35.5	φ 8.5~9.5	≧ 75
GRFC-10	26.3	26.4	32.4	37.2	φ 9.5~10.5	≧ 105
GRFC-13	29.1	29.4	31.5	36.3	φ 12.5~13.5	≧ 95
GRFC-7	14.25	15.8	20.0	24.0	φ 7max	≧ 45
RFC-H13	31.7	29.4	41.0	—	φ 12.5~13.5	≧ 170
RFC-20	40.0	40.0	47.0	—	φ 20max	≧ 180




RFCK2-20 (RFC-20 with mounting fixture is available. Contact us for the details.)


*Contact us for the measurement conditions.

*The values are measured data for reference, not guaranteed.


■ GRFC-3




■ GRFC-4




■ GRFC-5




■ GRFC-6




■ GRFC-7




■ GRFC-8




■ GRFC-9




■ GRFC-10



■ GRFC-13



■ RFC-H13



■ RFC-20

