

Magnetics

Miniature Low Profile, Shielded Surface Mount Inductors



MODEL HA66


Features

- Operating Temperature Range -40°C to $+125^{\circ}\text{C}$
- Ambient Temperature, Maximum $+85^{\circ}\text{C}$
- Temperature Rise, Maximum 40°C
- RoHS Compliant
- AEC-Q200 Certified



All parts are Pb-free and comply with EU Directive 2011/65/EU

Schematic



Specifications @ 25°C

Part Number	Inductance μH Typ. $\mu\text{H} \pm 20\%$	DC Resistance Ω Max.	Isat (A)	Irms (A)
HA66-5302R5LF	2.5	0.018	3.40	7.50
HA66-5303R0LF	3.0	0.024	3.20	7.25
HA66-5304R2LF	4.2	0.031	2.45	6.50
HA66-5305R3LF	5.3	0.038	2.25	5.90
HA66-5306R2LF	6.2	0.045	1.95	5.45
HA66-5308R2LF	8.2	0.053	1.80	4.00
HA66-530100LF	10	0.065	1.60	4.50
HA66-530120LF	12	0.076	1.57	4.49
HA66-530150LF	15	0.103	1.40	3.50
HA66-530180LF	18	0.110	1.25	3.45
HA66-530220LF	22	0.122	1.12	3.18
HA66-530270LF	27	0.175	1.00	2.38
HA66-530330LF	33	0.189	0.90	2.50
HA66-530390LF	39	0.212	0.85	2.19

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc

BI Technologies
120 S. State College Blvd. Suite #175 Brea, CA 92821
Ph: 714-447-2345

<http://www.ttelectronics.com/magnetics/customer-service-enquiry>

Inductor

Miniature Low Profile,

Shielded Surface

Mount Inductors

MODEL HA66



Specifications @ 25°C (Continued)

Part Number	Inductance μH Typ. $\mu\text{H} \pm 20\%$	DC Resistance Ω Max.	Isat (A)	Irms (A)
HA66-530470LF	47	0.260	0.80	2.00
HA66-530560LF	56	0.305	0.72	1.71
HA66-530680LF	68	0.355	0.65	1.64
HA66-530820LF	82	0.463	0.59	1.52
HA66-530101LF	100	0.520	0.52	1.40

HA66-6403R3LF	3.3	0.020	4.40	11.20
HA66-6405R0LF	5.0	0.024	3.75	8.35
HA66-6406R2LF	6.2	0.027	3.20	9.00
HA66-6407R4LF	7.4	0.031	3.15	7.30
HA66-6408R7LF	8.7	0.034	2.90	7.20
HA66-640100LF	10	0.038	2.60	5.45
HA66-640120LF	12	0.053	2.40	5.70
HA66-640150LF	15	0.057	2.20	5.10
HA66-640180LF	18	0.092	2.00	5.20
HA66-640220LF	22	0.096	1.90	4.35
HA66-640270LF	27	0.109	1.58	4.16
HA66-640330LF	33	0.124	1.48	3.80
HA66-640390LF	39	0.138	1.30	3.40
HA66-640470LF	47	0.155	1.20	3.30
HA66-640560LF	56	0.202	1.12	2.60
HA66-640680LF	68	0.234	1.00	2.38
HA66-640820LF	82	0.324	0.90	2.36
HA66-640101LF	100	0.358	0.80	2.30
HA66-640221LF	220	0.820	0.55	1.22

Notes: (1) Isat is the saturation current which inductance rolls off approximately 35% from its initial (zero DC)
(2) Ims is the approximate current at which $\Delta T=40^\circ\text{C}$

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc

BI Technologies
120 S. State College Blvd. Suite #175 Brea, CA 92821
Ph: 714-447-2345
<http://www.ttelectronics.com/magnetics/customer-service-enquiry>

Inductor

Miniature Low Profile,

Shielded Surface

Mount Inductors


MODEL HA66




Packaging

Standard:	Embossed Tape and Reel		
	Reel:	Diameter:	= 13" (330.2mm)
		Capacity:	Case size 530 = 2000 units Case size 640 = 1000 units

Ordering information

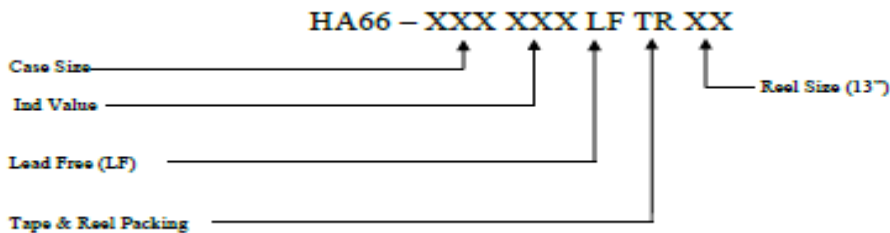

Outline dimensions (mm)

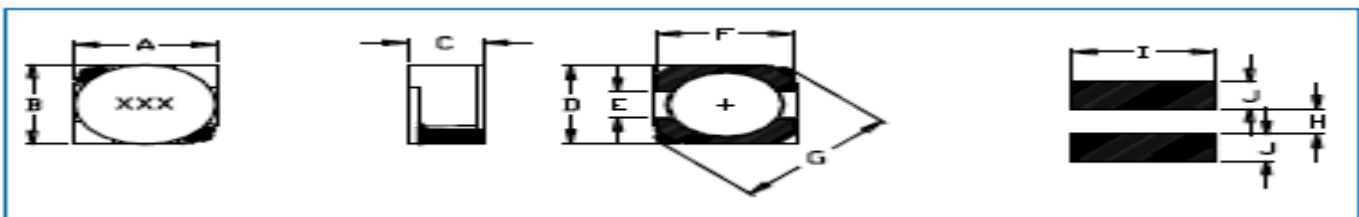

Case Size	A	B	C Max	D	E	F	G Max	H	I	J
530	5.7±0.5	5.7±0.5	3.0	5.5±0.3	2.0±0.15	5.5±0.3	8.2	2.0	6.3	2.15
640	6.7±0.5	6.7±0.5	4.0	6.5±0.3	2.0±0.15	6.5±0.3	9.5	2.0	7.3	2.65

General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

BI Technologies
 120 S. State College Blvd. Suite #175 Brea, CA 92821
 Ph: 714-447-2345
<http://www.ttelectronics.com/magnetics/customer-service-enquiry>