

Twist-Lock® Devices

20 Ampere, 3Ø Y 120/208, 277/480 and 347/600 Volts AC

4 Pole, 5 Wire Grounding

Insulgrip® Connector Bodies and Receptacles



**20A 3ØY
120/208V AC**
NEMA L21-20R
UL/CSA
2 HP



**20A 3ØY
277/480V AC**
NEMA L22-20R
UL/CSA
5 HP



**20A 3ØY
347/600V AC**
NEMA L23-20R
UL/CSA

Connector Bodies

Watertight Safety-Shroud®

IP66 SUITABILITY

Description	Cord Dia.	Catalog Numbers		
Black Valox® housing, white Valox® clamps.	.35"-1.15" (9-29)	HBL2513SW	-	-



HBL2513SW

Insulgrip

IP20 SUITABILITY

Description	Cord Dia.	Catalog Numbers			
Black and white nylon.	.35"-1.15" (9-29)	HBL2513	HBL2523	HBL2533	
All black nylon.	.35"-1.15" (9-29)	HBL2513BK	-	-	
Corrosion resistant, yellow nylon.	.35"-1.15" (9-29)	HBL25CM13	-	-	
Black and white for flat cable.	.35"-1.15" (9-29)	HBL2513FC	-	-	



HBL2513

Accessories on page B-53.

Receptacles

Watertight Safety-Shroud, Back Wired

IP66 SUITABILITY

Description	Catalog Numbers		
Gray Valox® housing and flange.	HBL2510SW	-	-

Accessories on page B-54.

Safety-Shroud Twist-Lock, Back Wired

IP20 SUITABILITY

Description	Catalog Numbers		
Gray Valox® angle housing, one gang.	HBL2510AR	-	-
Gray Valox® surface mounting, one gang.	HBL2510SR	-	-
Gray Valox® semi-flush, two gang.	HBL2510SR2	-	-

Accessories on page B-54.

Single Flush, Back and Side Wired

IP20 SUITABILITY

Description	Catalog Numbers			
Black nylon face.	HBL2510	HBL2520*	HBL2530*	
Isolated ground, orange nylon face.	IG2510	-	-	


Accessories on page B-52.

Insulgrip Flanged Receptacles

Description	Catalog Numbers			
Nylon casing, back wired.	HBL2516	HBL2526	HBL2536	

Accessories on page B-52.


Note: * Not Fed Spec.

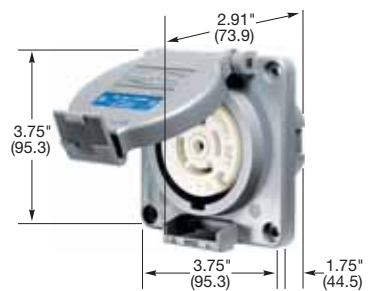


HBL2510SW




HBL2510AR



HBL2516



HBL2510



HBL2510SR2



HBL2510SR

Valox® is a trademark of SABIC Innovative Plastics, acquired from General Electric Company.