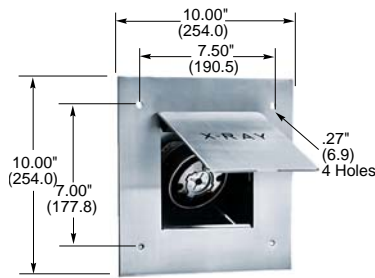
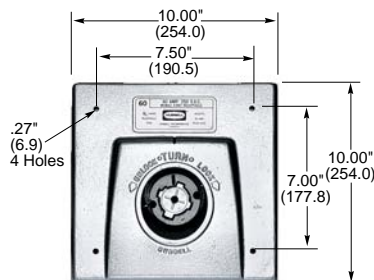





Hospital Products

2 Pole, 3 Wire Grounding

50 and 60 Ampere, 250 Volts AC

HUBBELLOCK® Mobile X-Ray Devices**HBL25605****HBL25603****HBL25515****HBL25615****HBL25509****Mobile X-Ray Receptacles****IP30**
SUITABILITY

50A 250V AC




60A 250V AC


Description

Receptacle with stainless steel plate assembly.

Receptacle with cast aluminum plate assembly.

Catalog Numbers**HBL25505** **HBL25605****HBL25503** **HBL25603****Mobile X-Ray Plugs****IP30**
SUITABILITY

50A 250V AC



60A 250V AC

Description

Plug, with epoxy kit, less cord clamp.

Plug, with cord clamp, less epoxy kit.

Catalog Numbers**HBL25515** **HBL25615****HBL25525** **HBL25625**

Note: Cord clamp range of plugs with cord clamps .830" to 1.3" (21.1 to 33.0).
50A plugs fit 50A or 60A receptacles.

Accessory**Description**

Box, stamped steel 8" x 8" x 4"
(203.2 x 203.2 x 101.6), accommodates
50A and 60A mobile X-ray receptacles.
Knockout sizes 1 1/4", 1 1/2" and 2".

Catalog Number**HBL25509**