

Straight Blade Devices
30 Ampere, 125, 250 Volts, 277 Volts AC and 125/250 Volts
 2 Pole, 3 Wire Grounding and 3 Pole, 3 Wire Non-Grounding
 Single Receptacles and Plugs



30A, 125V
2 Pole, 3 Wire Grounding
Receptacles and Plugs

IP20
 SUITABILITY




30A 125V
 NEMA 5-30R
 UL CSA
 2 HP



30A 125V
 NEMA 5-30P
 UL CSA
 2 HP

Description	Cord Diameter	Catalog Numbers
Receptacle, black RTP.	-	HBL9308 -
Receptacle, orange, isolated ground. ⁽¹⁾	-	IG9308 -
Plug, nylon, angle, 4-position.	.625"-1.187" (15.9-30.1)	- HBL9309*



HBL9308

30A, 250V
2 Pole, 3 Wire Grounding
Receptacles and Plugs

IP20
 SUITABILITY




30A 250V
 NEMA 6-30R
 UL CSA
 2 HP



30A 250V
 NEMA 6-30P
 UL CSA
 2 HP

Description	Cord Diameter	Catalog Numbers
Receptacle, black RTP.	-	HBL9330 -
Receptacle, orange, isolated ground. ⁽¹⁾	-	IG9330 -
Plug, nylon, angle, 4-position	.625"-1.187" (15.9-30.1)	- HBL9331*



IG9308

30A, 277V
2 Pole, 3 Wire Grounding
Receptacles and Plugs

IP20
 SUITABILITY




30A 277V AC
 NEMA 7-30R
 UL CSA
 3 HP



30A 277V AC
 NEMA 7-30P
 UL CSA
 3 HP

Description	Cord Diameter	Catalog Numbers
Receptacle, black RTP.	-	HBL9315 -
Plug, nylon, angle, 4-position.	.625"-1.187" (15.9-30.1)	- HBL9319*


30A, 125/250V
3 Pole, 3 Wire Non-Grounding
Receptacles and Plugs

IP20
 SUITABILITY



30A 125/250V
 NEMA 10-30R
 UL Listed
 2(2) HP



30A 125/250V
 NEMA 10-30P
 UL Listed
 2(2) HP

Description	Cord Diameter	Catalog Numbers
Receptacle, black phenolic.	-	HBL9350 -
Receptacle, surface mount aluminum housing.	-	HBL9395 -
Plug, Insulgrip®, nylon.	.625"-1.00" (15.9-25.4)	- HBL9337C
Plug, nylon, angle, 4-position.	.625"-1.187" (15.9-30.1)	- HBL9333



HBL9331


Notes: (1) See Section J for complete line of isolated ground devices.
 *Not Fed. Spec. Listed.
 See page A-46 for accessories.



HBL9333



HBL9350

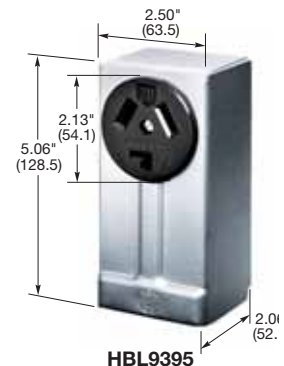

HBL9395