

HE3600 Miniature S.I.L. Relay Features and Benefits



Features

- Miniature single in line
- Optional coil suppression diode to protect coil drive circuits
- Normally open and normally closed contact versions
- Specialist ATE version
- External magnetic shield option
- Coaxial Shield option
- Diode suppression option

Benefits

- Sub-miniature size and single in line configuration allows very high packing densities, minimising space and cost
- Designed specifically to meet the ATE environment
- Lower power coil consumption than competing electromechanical devices
- Hermetically sealed switching contact is immune to the effects of its environment
- Transfer moulded package gives maximum component protection

Applications

- Telecoms
- Instrumentation
- Process
- Automatic Test Equipment

DIMENSIONS (in) mm

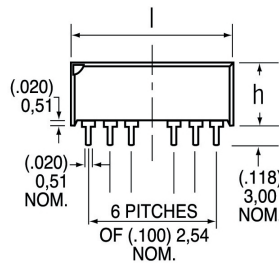


Figure 1
HE3621A (Coaxial)

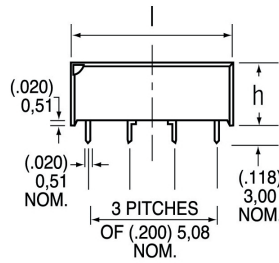


Figure 2
HE3621A, HE3671A





Figure 3
HE3600 (All)

Table I

Relay Type	Body Type	l	w	h
HE3600	Transfer Molded	(.750) 19,05	(.200) 5,08	(.300) 7,62
	External Shield	(.795) 20,20	(.238) 6,05	(.310) 7,87

HE3600 PCB LAYOUT (Bottom View)

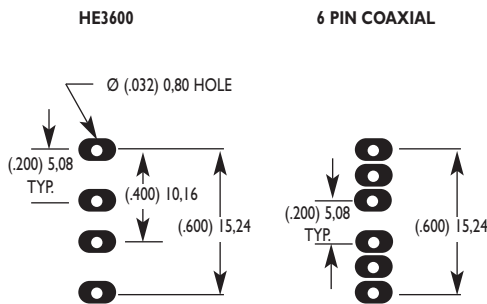

ORDERING INFORMATION

PART NUMBER HE36XX X XX XX

Model Number
HE3621 - Standard
HE3671 - Data Switching

Contact Type
A - Form A (SPST-NO)
B - Form B (SPST-NC)

Standard Coil
05 - 5 Volt
12 - 12 Volt
24 - 24 Volt

EXAMPLE: The HE3621A0550 is a I Form relay with a 5 Volt coil and external magnetic shield and diode

General Options





- 00 - No Options
- 10 - Diode Suppressed Coil
- 20 - Coaxial Shield (available on form A only diode not available)
- 40 - External Magnetic Shield
- 50 - External Magnetic Shield and Diode

See next page for: **Electrical and Operating Characteristics Description and Coil Characteristics**

Table 2 HE3600 Series  Recognised File #E47258 **Electrical and Operating Characteristics @ 25°C.**

Column Number			1	2	3
Contact Type			Form A SPST-NO Standard	Form A SPST-NO Data Switching	Form B SPST-NC Standard
Relay Types			HE3621A	HE3671A	HE3621B
CONTACT RATINGS Contact Hamlin for specific load/life details	Power, Switching Voltage, Switching Current, Switching Current, Carry	Watt - max. Vdc - max. A - max. A - max.	10 200 0.5 1.2	10 200 0.5 0.8	10 200 0.5 1.2
VOLTAGE HOLD-OFF	Across Open Contacts Contacts to Coil Between Isolated Terminals	Vdc - min. Vac - min. Vac - min.	250 1500 1500	250 1500 1500	250 1500 1500
RESISTANCE	Contact, Initial Insulation: Across Open Contacts Between Isolated Terminals	Ω - max. Ω - min. Ω - min.	0.150 10^{10} 10^{10}	0.100 10^{11} 10^{11}	0.150 10^{10} 10^{10}
TIMING	Operate Time Release Time	ms - max. ms - max.	1.0 1.0	1.0 1.0	1.0 1.0
ENVIRONMENTAL	Temperature, Operating Temperature, Storage Vibration Resistance Shock Resistance	°C °C G - max. 10-2000 Hz. G - max. 11 ms, 1/2 sine	-40 to +85 -40 to +105 20 50	-40 to +85 -40 to +105 20 50	-40 to +85 -40 to +105 20 50

Table 3 HE3600 Series Miniature Relay **Coil Characteristics @ 25°C.**

Contact Form & Type	Electrical & Operating Characteristics	Dimensions	Part Number	Nominal Coil Voltage Vdc	Coil Resistance $\pm 10\%$ Ohms	Must Operate Vdc	Must Release Vdc	Maximum Coil Voltage Vdc	Top View 2,54 mm, 0.1 in. Grid Dot on Case: Pin 1 Numbers not printed on case.
IA SPST-NO	See Table 2 Column 1	See Figure 2	HE3621A0500 HE3621A1200 HE3621A2400	5 12 24	500 1000 2150	3.75 8.0 16.0	0.5 1.0 2.0	14 22 31	
IA SPST-NO Coaxial Switching	See Table 2 Column 1	See Figure 1	HE3621A0520 HE3621A1220 HE3621A2420	5 12 24	200 500 1000	3.75 8.0 16.0	0.5 1.0 2.0	12 22 31	
IB SPST-NC	See Table 2 Column 3	See Figure 2	HE3621B0500 HE3621B1200	5 12	500 1000	3.75 8.0	0.5 1.0	See Note 1, 2 6.0 14.0	
IA SPST-NO Data Switching	See Table 2 Column 2	See Figure 2	HE3671A0500 HE3671A1200 HE3671A2400	5 12 24	500 1000 2150	3.75 8.0 16.0	0.5 1.0 2.0	14 22 31	

- Notes: 1) HE3621B - Exceeding recommended voltage may cause contact reclosure.
2) External magnetic shielding not available on 12 Volt Form B relays.

INFORMATION PROVIDED ON THIS DATA SHEET IS PROVIDED FOR INFORMATION PURPOSES ONLY AND SHOULD NOT BE RELIED UPON AS BEING ACCURATE FOR ANY PARTICULAR PURPOSE. Product performance may be affected by the application to which the product is put. Upon request, HAMLIN will assist purchasers by providing information specific to any particular application. HAMLIN disclaims any and all liability whatsoever for any purchaser's reliance upon the information contained on this data sheet without further consultation with authorised representatives of HAMLIN.