

# HyperLink Wireless brand 900 MHz 13 dBi Yagi Antennas for ISM, GSM and Wireless LAN Systems

# Model: HG913Y

#### **Applications and Features**

# **Applications:**

- 900MHz ISM Band
- Wireless LAN systems
- Point to multipoint applications
- Non Line of Sight (NLOS)
- GSM


•

•

- RFID
- SCADA
- Wireless Video Links
- 900MHz Cellular

#### Features: •

- Superior performance
- Heavy duty steel construction
- All weather operation
- Heavy-duty 1/2" stainless steel boom
- Solid 1/8" elements
- 18 inch coax lead
- Can be installed for either vertical or horizontal polarization
- 1/8" thick plated steel mounting plate
- RoHS Compliant

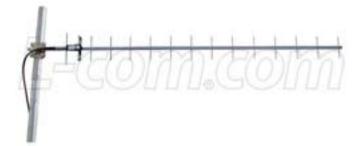

### **Product Description**

#### **Superior Performance**

The HyperGain® HG9013Y High-Performance Yagi Antennas combines high gain with a wide beam-width. They are ideally suited for directional applications in the 900MHz ISM and GSM bands. Typical applications include 900MHz Wireless LAN, SCADA, Wireless Video Links, 900 MHz Cellular, Non Line of Sight (NLOS) applications and point to multi-point systems. External interference of this antenna is minimized due to the excellent front to back ratio. These antennas comes with a 18" coax lead terminated with an N-Female connector. It can be installed for either vertical or horizontal polarization

#### **Rugged and Weatherproof**

This antenna features a heavy-duty 1/2" stainless steel boom and solid 1/8" elements. Secure mounting is assured by a 1/8" thick plated steel mounting plate and two plated steel U-bolts.



# **Specifications**

Model	HG913Y
Frequency	890-960 MHz
Gain	13 dBi
Polarization	Horizontal or Vertical
Horizontal Beam Width	30°
Vertical Beam Width	30°
Front to Back Ratio	18 dB
Impedance	50 Ohm
Max. Input Power	100 Watts
VSWR	< 1.5:1 avg.
Elements	15
Weight	2.7 lbs. (1.25 kg)
Length	57 in. (1.45 m)
Mounting	2 in. (50.8 mm) diameter mast max.
Operating Temperature	-40° C to to 85° C (-40° F to 185° F)
Lightning Protection	DC Short
Connector	N-Female
Wind Survival	135 MPH
RoHS Compliant	Yes

# Wind Loading Data

Wind Speed (MPH)	Loading
100	11.5 lb.
120	18.2 lb.
100 w/1/2" Radial Ice	21 lb.

#### **RF Antenna Gain Patterns**

