

**COIL:**

RESISTANCE	2074 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.4 VDC
MUST RELEASE	1.4 VDC


**ENVIRONMENT:**

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	100	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

**NOTES:**

OPERATE	5 MS MAX
RELEASE	3 MS MAX
BOUNCE	3 MS MAX

**CUSTOMER DATA SHEET**

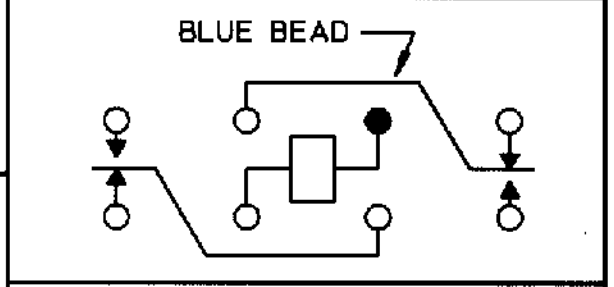

**CONTACT RATING: LOW LEVEL TO 2A**  
**30 VDC RESISTIVE 100,000**  
**OPERATIONS MIN**

DR. R.B. 5/20/92 CK5/20/92 JMB



CUST.	HI-G
CUST. NO.	2KA-1B-126

TYPE "HMS" RELAY

HMS1196S01