

KWIK SNAP Terminal Blocks

Specification:-

Housing: Polypropylene (94-V2 grade)
 Metal Part: Plated Metal Insert
 Tml Screw Zinc-plated steel

Features & Benefits:-

Easy, Kwik & clean break – No tools required
 Pole dividers support screws for assembly
 VDE approved & rated to T85-110
 Formed, zinc plated steel insert

Hylec-APL Part Number	HYKS-02412PP	HYKS-03212PP	HYKS-05712PP	HYKS-07612PP
	<u>T04</u>	<u>T06</u>	<u>T10</u>	<u>T16</u>
Voltage (V)	450	450	450	750
Ampere (A)	24	32	57	76
VDE / IEC-rated				
Max Wiring Capacity (mm ²)	4.0	6.0	10.0	16.0

Ambient Temperature : T85-T110°C


Dimensions (mm)	<u>T04</u>	<u>T06</u>	<u>T10</u>	<u>T16</u>
Height	12.2	14.0	16.3	20.9
Length	93.5	116.5	139.3	169.5
Width	17.8	20.0	23.4	27.7
Spacing	8.0	10.0	12.0	14.5



- Comply with IEC/EN60998-1,60998-2-1
 - Colour: white

Tel :-
01933 234400

Fax :-
01933 234411

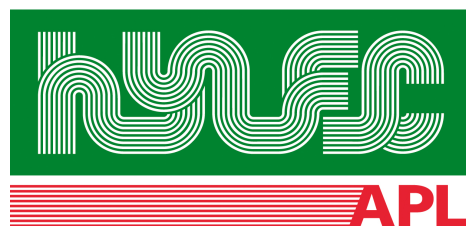

Web :- www.hylec-apl.com

Email :- sales@hylec-apl.com

Making The Right Connections