

## IWTXT SERIES

### WIRELESS 4-20 mA TRANSMITTER WITH Tx SUPPLY



#### Inputs

The input types and ranges included below are our standard ones only. Contact Sensata for others.

DC Current & Voltage  
 0-20 mA, 4-20 mA, 0-10 mA into 15/30Ω  
 0-1V, 0-10V, 1-5V into 100kΩ/1MΩ

Any standard 4-20 mA transmitter

#### SPECIFICATIONS

Parameter	Min	Typ	Max	Comments
Supply Voltage		3.6V		Battery Powered (18V Tx Supply)
Supply Current (mA)			40	When transmitting data
Input Impedance (Volt)		15Ω		Dependent on range, typical = 4-20 mA
Operating Ambient	-200°C		55°C	
Relative Humidity	0%		90%	
Isolation Voltage	1kV			

The IWTxT is designed to convert any standard 4-20 mA transmitter into a wireless unit.

It works by switching on a supply to the 4-20 mA transmitter, waiting for a suitable settling time and then sending the data to one of Sensata's standard wireless receiver units.

The IWTxT is specially designed to maximise battery life and in a typical application the battery life will exceed 12 months. The data update rate is user selectable to suit the requirement of each measured variable and so maximize battery life.

Typical update rates include 1 second, 10 seconds, 60 seconds or 1 hour. The system also features a signal strength reading and time since last transmission which can be remotely monitored.

The IWTxT is designed to operate with the IWR range of receivers. The IWR-1 can output a 4-20 mA or 1-5V signal whilst the IWR-PORT can store up to 128 variables for transmission to an industrial Ethernet connection or an RS-232/485 communications link.

#### Features

- Battery powered wireless transmitter
- Supplies excitation voltage to 4-20 mA transmitters
- Long battery life
- Make any transmitter into a wireless transmitter
- Complete thermocouple, RTD, Pressure and Level wireless probes are available

## Installation Detail

<b>Mounting</b>	Wall mounting
<b>Orientation</b>	Any
<b>Connections</b>	Screw clamp with pressure plate
<b>Conductor size</b>	0.5-4.0mm
<b>Insulation Stripping</b>	12mm
<b>Weight</b>	Approx 100g
<b>Enclosure Size</b>	160 x 90mm x 50mm deep

## Connection Details

1. Battery -ve
2. Battery +ve
3. Input +ve
4. Tx Supply +ve

## Input/Output Signals

<b>Input (transmitter)</b>	mV AC from an AC current transformer
<b>Receiver Part Number Receiver Outputs</b>	
<b>IoT Gateway</b>	Pairs with up to 128 wireless transmitters. Sends data via MQTT to on-premises servers or the cloud using the built-in 2G/3G or 4G modem. 8 Digital Inputs, 4 relay outputs.
<b>IWR-PORT</b>	RS-232 or RS-485 or Ethernet MODBUS Communications. Up to 128 off analog 4-20 mA or Relay outputs can be obtained by fitting extra ISOSLICE I/O modules
<b>IWR-USB</b>	Displays & Logs data on any PC running IWR-USB software
<b>IWR-5</b>	5 off 4-20 mA or 1-5 V dc and 1 Relay output
<b>IWR-1</b>	1 off 4-20 mA and 1-5 V dc and 1 Relay output

\*\*\*Transmission Update Rate 1, 5, 10 and 30 seconds

\*\*\* Consult installation manual for set-up:

- Single channel system is DIL switch configurable
- Five channel system requires set-up using "IWR Set" user software




## ORDERING OPTIONS

<b>Part Number</b>	IWTXT-00
<b>Input Type</b>	4-20 mA
<b>Input Range</b>	0-100%
<b>Spare Battery</b>	IBAT-1
<b>Power Supply</b>	Battery powered



## DIMENSIONS

All dimensions are in millimeters.

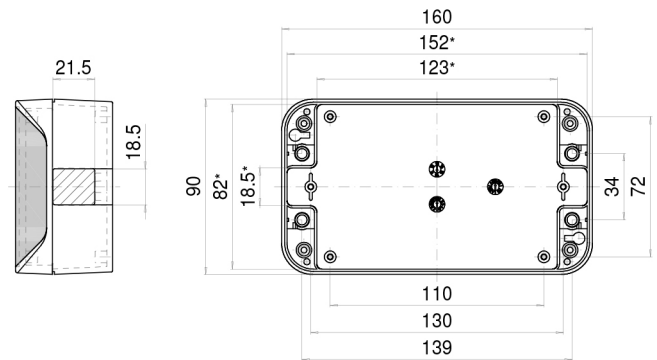

Made in the UK

Page 2

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at [www.sensata.com](http://www.sensata.com) SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

## CONTACT US

EUROPE  
+44 (0)1202 897969  
c3w\_sales@sensata.com  
Cynergy3 Components Ltd.  
7 Cobham Road,  
Ferndown Industrial Estate,  
Wimborne, Dorset,  
BH21 7PE, United Kingdom

USA  
+1 310 561 8092 / +1 866 258 5057  
c3w\_sales@sensata.com