

**FEATURES:**

- Switching capacity 16A
- Small size suitable for high density mounting
- PC board mounting
- UL/CUL certified



RoHS Compliant



29.0 x 12.7 x 26.0 mm

**CONTACT DATA**

Contact Arrangement	1A = SPST N.O. 1C = SPDT 2A = DPST N.O. 2C = DPDT
Contact Rating	1A & 1C: 10A @ 250VAC 1A & 1C: 16A @ 250VAC 2A & 2C: 5A @ 220VAC 1hp, 250VAC; 1/2hp, 125VAC; TV-5, 120VAC
Contact Resistance	< 50 milliohms initial
Contact Material	AgSnO <sub>2</sub>
Maximum Switching Power	480W, 4000VA
Maximum Switching Voltage	380VAC, 110VDC
Maximum Switching Current	16A

**COIL DATA**

Coil Voltage VDC		Coil Resistance Ω ± 10%		Pick Up Voltage VDC (max)	Release Voltage VDC (min)	Coil Power W	Operate Time ms	Release Time ms
Rated	Max.	.53W	.80W	75% of rated voltage	10% of rated voltage			
3	3.9	17	11	2.25	0.3	.53 .80	10	5
5	6.5	47	31	3.75	0.5			
6	7.8	68	45	4.50	0.6			
9	11.7	153	101	6.75	0.9			
12	15.6	272	180	9.00	1.2			
15	23.4	425	319	11.30	1.5			
24	31.2	1087	720	18.00	2.4			

**CAUTION:**

1. The use of any coil voltage less than the rated coil voltage may compromise the operation of the relay.
2. Pickup and release voltages are for test purposes only and are not to be used as design criteria.


**GENERAL DATA**

Electrical Life @ rated load	100K cycles, typical
Mechanical Life	10M cycles, typical
Insulation Resistance	100MΩ min @ 500VDC
Dielectric Strength, Coil to Contact	5000V rms min. @ sea level
Contact to Contact	2000V rms min. @ sea level
Shock Resistance	500m/s <sup>2</sup> for 11ms
Vibration Resistance	1.50mm double amplitude 10-40Hz
Operating Temperature	-40°C to + 85°C
Storage Temperature	-40°C to + 155°C
Solderability	260°C for 5s
Weight	20g

**ORDERING INFORMATION**

<b>1. Series:</b> J114	<b>J114</b>	<b>1C</b>	<b>S</b>	<b>16</b>	<b>12VDC</b>	<b>5.0</b>	<b>.53</b>
<b>2. Contact Arrangement:</b> 1A = SPST N.O. 1C = SPDT 2A = DPST N.O. 2C = DPDT							
<b>3. Sealing Options:</b> S = Sealed							
<b>4. Contact Rating:</b> 5 = 5A (2A & 2C contact arrangement only) 10 = 10A (1A & 1C contact arrangement only) 16 = 16A (1A & 1C contact arrangement only)							
<b>5. Coil Voltage:</b> 3VDC **Only available with 1 Pole Versions 5VDC **Only available with 1 Pole Versions 6VDC 9VDC 12VDC 15VDC 24VDC							
<b>6. Terminal Spacing (L Dimension):</b> 3.5 = 3.5mm **Only available in 10A version 5.0 = 5.0mm **Not available in 10A version							
<b>7. Coil Power:</b> .53 = .53W .80 = .80W							

**DIMENSIONS (Units = mm)**

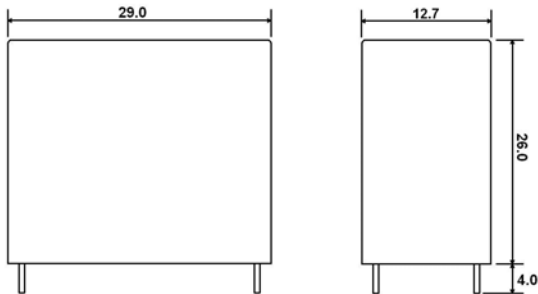

**SCHEMATICS & PC LAYOUTS (BOTTOM VIEWS)**

