


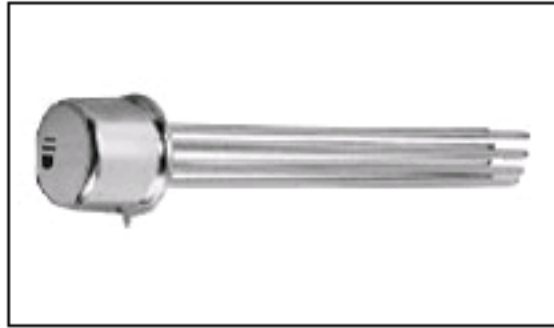

JMACD-26XLS Product Details

[Share](#)
[Print](#)
[Email](#)


JMACD-26XLS
(1-1617122-0)

TE Internal Number: 1-1617122-0

Active

Military/Aerospace High Performance Relays

Not EU RoHS or ELV Compliant

Product Highlights:

- MAD TO-5 Relay Series
- Input Voltage = 26.5 VDC
- Contact - Arrangement = 2 Form C, DPDT, 2 C/O
- Contact - Rated Current = 1 A
- Non Polarized, Monostable Coil - Magnetic System

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#)
[Request Sample](#)
[Find Similar Products](#)
[Buy Product](#)

Feedback

Documentation & Additional Information

Product Drawings:

- None Available

Catalog Pages/Data Sheets:

- [RELAY](#) (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- MOSFET Driver = Without

Mechanical Attachment:

- Mounting Options = PC Board

Electrical Characteristics:

- Input Voltage (VDC) = 26.5
- Contact - Rated Current (A) = 1
- Coil Suppression Diode = With
- Coil Polarity Protection Diode = Without
- Transistor Driver = Without
- Coil - Resistance (Ω) = 1560
- Coil Power Measurement = Milliwatts
- Coil - Rated Power, DC (mW) = 450
- Actuating System = DC
- Shock = 75 G's, 6ms
- Vibration = 30G's, 10 to 3000Hz

Termination Features:

- Termination Type = Long Leads

Body Features:

- Enclosure Type = Hermetically Sealed

Contact Features:

- Pin Configuration = .200" x .300" Spreader Pad

Configuration Features:

- [Contact - Arrangement](#) = 2 Form C, DPDT, 2 C/O
- [Coil - Magnetic System](#) = Non Polarized, Monostable

Industry Standards:

- [Government/Industry Qualification](#) = Yes
- [Government/Industry Part Number](#) = M39016/15-105L
- [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- [Lead Free Solder Processes](#) = Not suitable for lead free processing
- [Approved Standards](#) = M39016 Qualified, L Level

Conditions for Usage:

- [Temperature Range \(°C\)](#) = -65 - +125

Other:

- [Series](#) = MAD TO-5 Relay
- [Brand](#) = CII

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)

Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

Keep Me Informed

