


## TO-5/.100 GRID

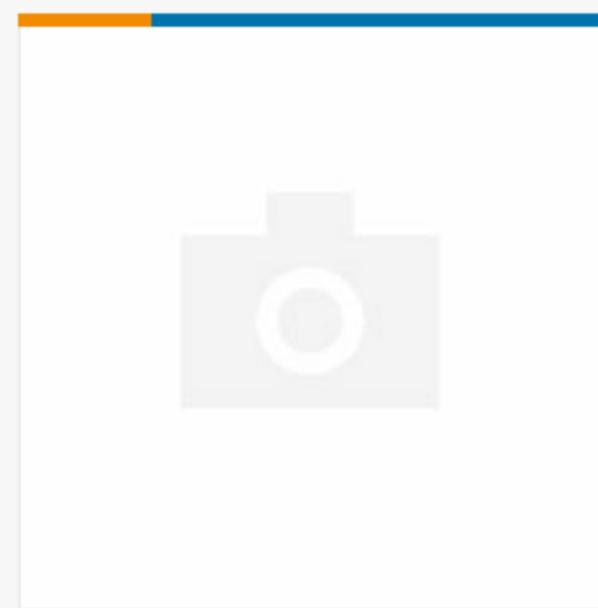

✓ Active

TE CONNECTIVITY

### JMAPD-26XP = M39016/15-039P

JMAPD-26XP

TE Internal Number: 1617124-5  
 Mil-Spec: M39016/15-039P

[Not EU RoHS or ELV Compliant](#)  
[Find Compliant Alternatives](#)

Contact Arrangement **2 Form C, DPDT, 2 C/O**

Input Voltage(VDC) **26.5**

Coil Suppression Diode **With**

MOSFET Driver **Without**

Transistor Driver **Without**  
[> See All Features](#)

North America ▼

[SAVE TO LIST](#)

[FIND SIMILAR PRODUCTS](#)

DISTRIBUTOR	QUANTITY	DATE AS OF	
<b>FLAME ENTERPRISES</b> 800-854-2255	191	2015/08/26	>
<b>MASTER ELECTRONICS CORP.</b> 1-888-473-5297	111	2015/09/04	>
<b>ONLINE COMPONENTS</b> 1-888-473-5297	37	2015/09/03	>

## DOCUMENTATION FEATURES

Please review product documents or [contact us](#) for the latest agency approval information.

Product Type Features		
MOSFET Driver		<b>Without</b>
Enclosure Type		<b>Hermetically Sealed</b>
Product Type		<b>Relay</b>
Relay Type		<b>Military/Aerospace High Performance</b>

Configuration Features		
Transistor Driver		<b>Without</b>

Electrical Characteristics		
Input Voltage(VDC)		<b>26.5</b>
Coil Suppression Diode		<b>With</b>
Coil Voltage(VDC)		<b>26.5</b>
Coil Resistance(Ω)		<b>1560</b>
Coil Power Rating (DC)(mW)		<b>450</b>
Coil Polarity Protection Diode		<b>Without</b>
Actuating System		<b>DC</b>
Vibration		<b>30G's, 10 – 3000Hz</b>
Coil Power Measurement		<b>Milliwatts</b>
Coil Magnetic System		<b>Non-Polarized, Monostable</b>
Shock		<b>75G's, 6ms</b>

Contact Features		
Contact Arrangement		<b>2 Form C, DPDT, 2 C/O</b>
Contact Current Rating(A)		<b>1</b>
Contact Current Class		<b>Low Level – 1 A</b>

Termination Features		
Termination Type		<b>PC Pins</b>

Mechanical Attachment		
Mounting Type		<b>Printed Circuit Board</b>

Usage Conditions		
Operating Temperature Range(°C)		<b>-65 – 125</b>

Product Compliance [Statement of Compliance PDF](#)  
[VIEW ALL PRODUCT COMPLIANCE](#)

## COMPATIBLE

No compatible products found for JMAPD-26XP