

mm inch

**RoHS Directive compatibility information**  
<http://www.nais-e.com/>

### FEATURES

- Low pick-up voltage for high ambient use
- Sealed construction
- Global standard terminal pitch
- Usable at high temperature: 85°C 185°F

### TYPICAL APPLICATIONS

- Power-window
- Car antenna
- Door lock
- Intermittent wiper
- Interior lighting
- Power seat
- Power sunroof
- Car stereo
- Horn
- Lift gate, etc.

## SPECIFICATIONS

### Contact

	Standard type	High capacity type
Arrangement	1 Form A, 1 Form C	
Contact material	Ag alloy (Cadmium free)	
Initial contact resistance (By voltage drop 6 V DC 1 A)	*Max. 100 mΩ	*Max. 100 mΩ
Contact voltage drop	Max. 0.2 V DC (at 10 A 12 V DC)	
Rating	Nominal switching capacity	10 A 16 V DC (resistive)    15 A 16 V DC (resistive)
	Max. carrying current	25 A (at 20°C 68°F for 2 minutes) 15 A (at 20°C 68°F for 1 hour) 20 A (at 85°C 185°F for 2 minutes) 10 A (at 85°C 185°F for 1 hour)
	Max. switching power	160 W
	Max. switching voltage	16 V DC
	Max. switching current	10 A                      15 A (10 A max. at 85°C)
	Min. switching capacity#1	1 A 12 V DC
Expected life (min. ope.)	Mechanical life (at 180 cpm)	10 <sup>7</sup>
	Electrical (at 15 cpm)	Resistive: 10 <sup>5</sup> N.O.: 10 <sup>5</sup> N.C.: 5×10 <sup>4</sup>

\* Measured after operating 5 times at the rated load

### Coil

Nominal operating power	640 mW
-------------------------	--------

### Contact rating

Load	Standard type			High capacity type		
	Form A	Form C		Form A	Form C	
		N.O.	N.C.		N.O.	N.C.
Max. carry current	15 A	15 A	15 A	15 A	15 A	15 A
Max. make current	25 A	25 A	10 A	50 A	50 A	15 A
Max. break current	10 A	10 A	10 A	15 A	15 A	15 A

### Characteristics

Max. operating speed (at rated load)	15 cps.	
Initial insulation resistance*1	Min. 100 MΩ (at 500 V DC)	
Initial breakdown voltage*2	Between open contacts	750 Vrms for 1 min.
	Between contacts and coil	1,500 Vrms for 1 min.
Operate time*3 (at nominal voltage)	Max. 10 ms	
Release time (without diode)*3 (at nominal voltage)	Max. 10 ms	
Shock resistance	Functional*4	Min. 98 m/s <sup>2</sup> {10 G}
	Destructive*5	Min. 980 m/s <sup>2</sup> {100 G}
Vibration resistance	Functional*6	10 Hz to 55 Hz at double amplitude of 1.6 mm
	Destructive	10 Hz to 55 Hz at double amplitude of 2 mm
Conditions for operation, transport and storage*7 (Not freezing and condensing at low temperature)	Ambient temp.	-40°C to +85°C -40°F to +185°F
	Humidity	5% R.H. to 85% R.H.
Mass	Approx. 12 g .423 oz	

#1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

### Remarks

\*1 Measurement at same location as "Initial breakdown voltage" section

\*2 Detection current: 10mA

\*3 Excluding contact bounce time

\*4 Half-wave pulse of sine wave: 11ms; detection time: 10μs

\*5 Half-wave pulse of sine wave: 6ms

\*6 Detection time: 10μs

\*7 Refer to Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT

## ORDERING INFORMATION

Ex. JSM

12V

Contact arrangement	Protective construction	Coil voltage (DC)	Contact material
1a: 1 Form A 1: 1 Form C	Nil: Sealed construction F: Flux-resistant type	12 V	4: Standard type (10 A) 5: High capacity type (15 A)

Note: Standard packing: Carton: 100 pcs. Case: 500 pcs.

# JS-M


## TYPES AND COIL DATA (at 20°C 68°F)

Contact arrangement	Coil voltage, V DC	Standard type (10 A)		High capacity type (15 A)		Nominal voltage, V DC	Pick-up voltage, V DC	Drop-out voltage, V DC	Coil resistance $\Omega$	Nominal operating current, mA	Nominal operating power, mW	Max. allowable voltage, V DC (at 80°C 176°F)
		Sealed type	Flux-resistant type	Sealed type	Flux-resistant type							
1 Form A	12	JSM1a-12V-4	JSM1aF-12V-4	JSM1a-12V-5	JSM1aF-12V-5	12	Max. 6.3	Min. 0.9	225±10%	53.3±10%	640	10 to 16
1 Form C	12	JSM1-12V-4	JSM1F-12V-4	JSM1-12V-5	JSM1F-12V-5	12	Max. 6.3	Min. 0.9	225±10%	53.3±10%	640	10 to 16

\* Other pick-up voltage types are also available. Please contact us for details.


## DIMENSIONS

mm inch

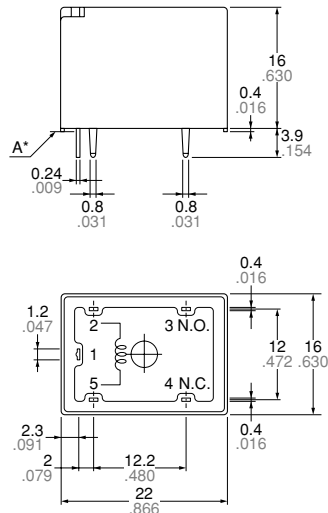


Dimension:	General tolerance
Max. 1mm .039 inch:	±0.1 ±.004
1 to 3mm .039 to .118 inch:	±0.2 ±.008
Min. 3mm .118 inch:	±0.3 ±.012

Schematic (Bottom view)

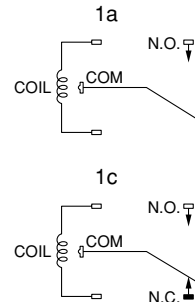

PC board pattern (Bottom view)

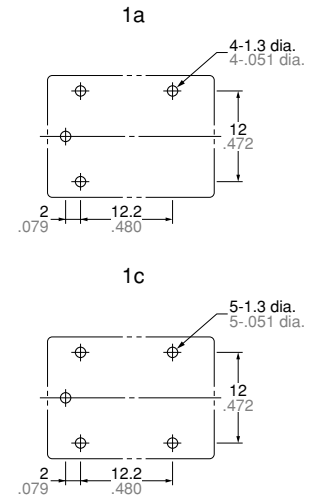


Tolerance: ±0.1 ±.004

\* Dimensions (thickness and width) of terminal specified in this catalog is measured before pre-soldering. Intervals between terminals is measured at A surface level.

## REFERENCE DATA


### 1-(1). Coil temperature rise (10A)

Measured portion: Inside the coil  
Contact carrying current, 10A  
Ambient temperature: Room temperature, 85°C  
185°F

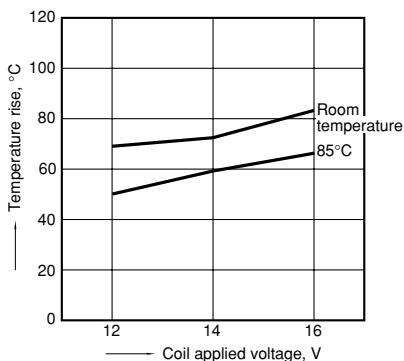


### 1-(2). Coil temperature rise (15A)


Measured portion: Inside the coil  
Contact carrying current, 15A  
Ambient temperature: Room temperature, 85°C  
185°F

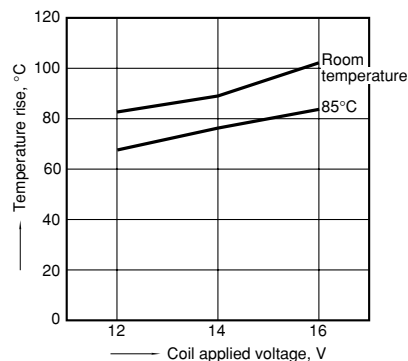


### 2. Max. switching capability (Resistive load, initial)

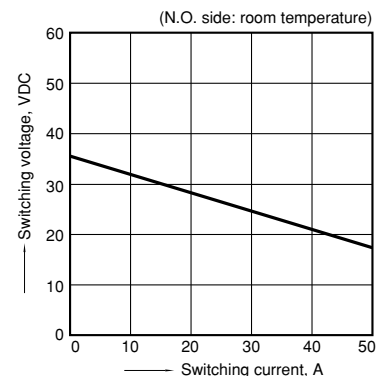


3. Ambient temperature and operating voltage range

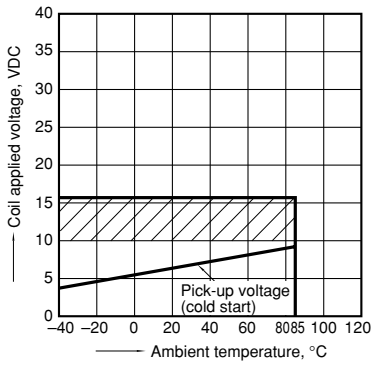

4. Distribution of pick-up and drop-out voltage  
Sample: JSM1-12V-5, 50pcs.

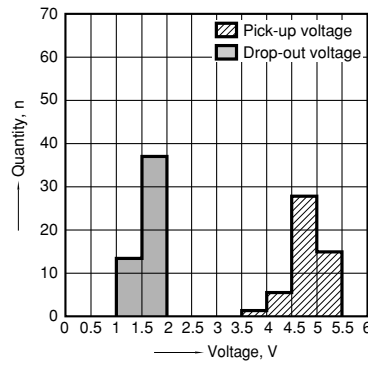



5. Distribution of operate and release time  
Sample: JSM1-12V-5, 50pcs.  
Coil both side without diode

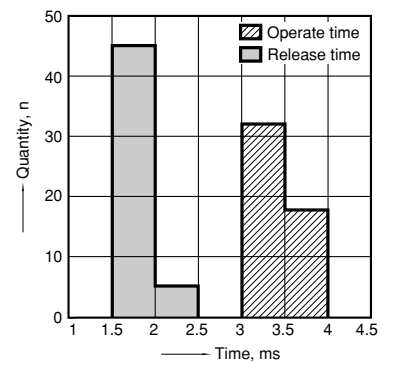

6-(1). Electrical life test (Motor load)

Sample: JSM1-12V-5, 3pcs.  
Load: 50A (Inrush), 10A 16V DC (Steady)  
Switching frequency: (ON : OFF = 1s : 9s)



Circuit :

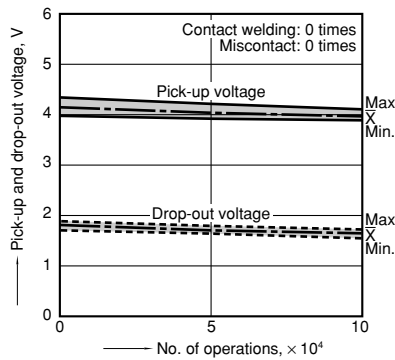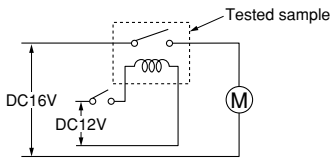

6-(2). Electrical life test (Lamp load)

Sample: JSM1-12V-5, 4pcs.  
Load: 55.2A (Inrush), 9.6A 14.5V DC (Steady)  
Switching frequency: (ON : OFF = 1s : 3s)

Circuit :

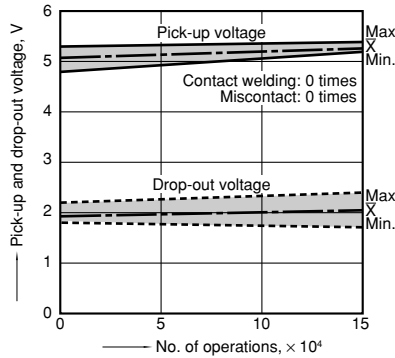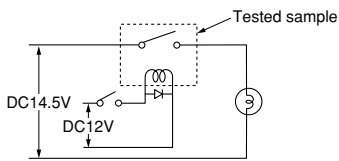

**For Cautions for Use, see Relay Technical Information.**