

Our new WADI series



WADI one.

The new standard for industrial applications.

- Large-area sealing protects the cable
- Integrated anchorage with high retention
- Temperature range -40 °C / +100 °C (dynamic)
- Protection grade IP66 / IP68 - 10 bar (30 min.) / IP69

WADI one EMV.

When safer signals mean survival.

- For cables with shielding
- All WADI's can also be retrofitted with contact springs
- Push contact spring into the shielding and click it into the WADI cable gland



WADI rail.

Designed for use in rail vehicle subsystems and in cold conditions.

- Fulfills superior claims on fire protection according to UL 94 V-0 and EN 45545-2, R22: HL3 / R23: HL3
- High UV, ozone and weather resistance
- Temperature range -60 °C / +100 °C (dynamic)
- Protection grade IP66 / IP67 / IP69

WADI heat.

If it gets extremely hot.

- Especially suitable for high temperature applications
- Very good resistance to many chemicals
- Temperature range -40 °C / +200 °C (dynamisch)
- Protection grade IP66 / IP67 / IP69



WADI one



WADI rail



WADI heat



WADI one EMV

TECHNICAL DATA:


Configuration

Dome nut	Brass CuZn39Pb3, nickel-plated
Sealing insert	TPE TPS
Gland body	Brass CuZn39Pb3, nickel-plated
O-ring	Nitrile rubber NBR
Connecting thread	metric, as per EN 60423

Properties

- large-area sealing protects the cable
- integrated anchorage with high retention
- wide sealing and clamping range
- the inner sealing ring can be removed easily for larger cables
- material of the sealing insert fulfills UL 94 HB
- high UV, ozone and weather resistance

Temperature range	-40 °C / +100 °C (dynamic)
Protection grade	IP66 / IP68 - 10 bar (30 min.) / IP69
Test standard	EN 62444

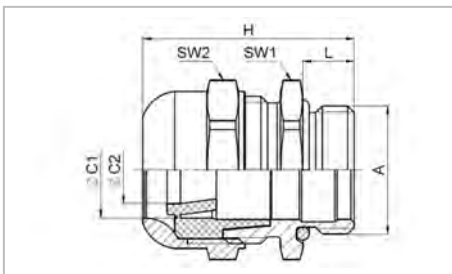

Features

Connecting thread standard length

A	∅C	∅C2	∅C1	$\frac{H}{L}$	L	SW1	SW2	H		Part No.
mm	mm	mm	mm	mm	mm	mm	mm	mm		
M12x1,5	3 - 8	3 - 5	5 - 8	6,5	16	16	25,5	100	100	K150-1012-00
M16x1,5	5 - 10,5	5 - 7,5	7,5 - 10,5	7,0	20	20	31,5	100	100	K150-1016-00
M20x1,5	8 - 15	8 - 10,5	10,5 - 15	8,0	25	25	33	50	50	K150-1020-00
M25x1,5	12,5 - 20,5	12,5 - 15,5	15,5 - 20,5	8,0	32	32	35,5	50	50	K150-1025-00
M32x1,5	17 - 25,5	17 - 20,5	20,5 - 25,5	9,0	36	36	40,5	25	25	K150-1032-00
M40x1,5	24 - 33	24 - 29	29 - 33	9,0	45	45	43	10	10	K150-1040-00
M50x1,5	31 - 42	31 - 37,5	37,5 - 42	10,0	55	55	47,5	5	5	K150-1050-00
M63x1,5	40 - 53	40 - 46	46 - 53	10,0	70	70	53	5	5	K150-1063-00

WADI one EMC-cable gland

K151-1xxx-zz

TECHNICAL DATA:

Configuration

Dome nut	Brass CuZn39Pb3, nickel-plated
Sealing insert	TPE TPS
Gland body	Brass CuZn39Pb3, nickel-plated
O-ring	Nitrile rubber NBR
Contact spring	Stainless steel 1.4310
Connecting thread	metric, as per EN 60423


Properties

- for cables with shielding
- quick and easy EMC connection of the cable shield via the contacting spring with the gland body and the housing potential
- large-area sealing protects the cable
- integrated anchorage with high retention
- wide sealing and clamping
- the inner sealing ring can be removed easily for larger cables
- high UV, ozone and weather resistance

Temperature range -40 °C / +100 °C (dynamic)


Protection grade IP66 / IP68 - 10 bar (30 min.) / IP69

Test standard EN 62444

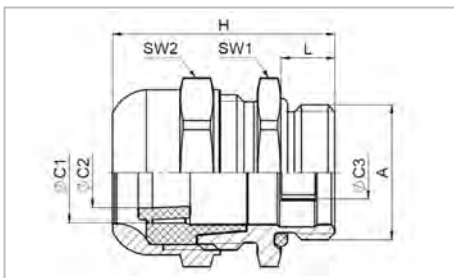

Features

Connecting thread standard length

A	ØC mm	ØC2 mm	ØC1 mm	ØC3 mm	$\frac{H}{L}$ mm	SW1 mm	SW2 mm	H mm		Part No
M12x1,5	3 - 8	3 - 5	5 - 8	3,5 - 5,5	6,5	16	16	25,5	100	K151-1012-00
M16x1,5	5 - 10,5	5 - 7,5	7,5 - 10,5	5,5 - 8	7,0	20	20	31,5	100	K151-1016-00
M20x1,5	8 - 15	8 - 10,5	10,5 - 15	8 - 11	8,0	25	25	33	50	K151-1020-00
M25x1,5	12,5 - 20,5	12,5 - 15,5	15,5 - 20,5	10 - 15	8,0	32	32	35,5	50	K151-1025-00
M32x1,5	17 - 25,5	17 - 20,5	20,5 - 25,5	13 - 20	9,0	36	36	40,5	25	K151-1032-00
M40x1,5	24 - 33	24 - 29	29 - 33	20 - 27	9,0	45	45	43	10	K151-1040-00
M50x1,5	31 - 42	31 - 37,5	37,5 - 42	26 - 34	10,0	55	55	47,5	5	K151-1050-00
M63x1,5	40 - 53	40 - 46	46 - 53	34 - 44	10,0	70	70	53	5	K151-1063-00

* ØC3 = Diameter of the cable shield



WADI rail cable gland

K160-1xxx-zz

TECHNICAL DATA:

Configuration

Dome nut	Brass CuZn39Pb3, nickel-plated
Sealing insert	TPE TPS
Gland body	Brass CuZn39Pb3, nickel-plated
O-ring	Nitrile rubber NBR
Connecting thread	metric, as per EN 60423


Properties

- material of the sealing insert fulfills superior claims on fire protection according to UL 94 V-0 and EN 45545-2, R22: HL3 / R23: HL3
- large-area sealing protects the cable
- integrated anchorage with high retention
- wide sealing and clamping range
- the inner sealing ring can be removed easily for larger cables
- halogen-free
- high UV, ozone and weather resistance

Temperature range -60 °C / +100 °C (dynamic)



Protection grade IP66 / IP67 / IP69

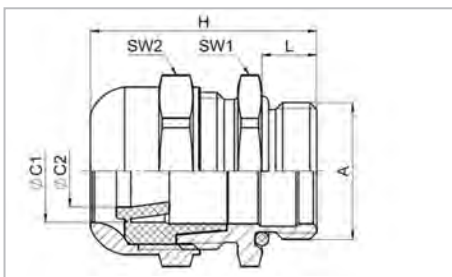Test standard EN 62444 / EN 45545-2



Features

Connecting thread standard length

A	ØC mm	ØC2 mm	ØC1 mm	 L mm	SW1 mm	SW2 mm	H mm		Part No.
M12x1,5	3 - 8	3 - 5	5 - 8	6,5	16	16	25,5	100	K160-1012-00
M16x1,5	5 - 10,5	5 - 7,5	7,5 - 10,5	7,0	20	20	31,5	100	K160-1016-00
M20x1,5	8 - 15	8 - 10,5	10,5 - 15	8,0	25	25	33	50	K160-1020-00
M25x1,5	12,5 - 20,5	12,5 - 15,5	15,5 - 20,5	8,0	32	32	35,5	50	K160-1025-00
M32x1,5	17 - 25,5	17 - 20,5	20,5 - 25,5	9,0	36	36	40,5	25	K160-1032-00
M40x1,5	24 - 33	24 - 29	29 - 33	9,0	45	45	43	10	K160-1040-00
M50x1,5	31 - 42	31 - 37,5	37,5 - 42	10,0	55	55	47,5	5	K160-1050-00
M63x1,5	40 - 53	40 - 46	46 - 53	10,0	70	70	53	5	K160-1063-00

Comment

Available as WADI rail EMC-cable gland, series K161-1xxx-zz.

TECHNICAL DATA:


Configuration

Dome nut	Brass CuZn39Pb3, nickel-plated
Sealing insert	Fluorine rubber FKM
Gland body	Brass CuZn39Pb3, nickel-plated
O-ring	Fluorine rubber FKM
Connecting thread	metric, as per EN 60423

Properties



- especially suitable for high temperature applications
- Sealing insert and O-ring have a very good resistance to many chemicals
- high UV, ozone and weather resistance
- large-area sealing protects the cable
- integrated anchorage with high retention
- wide sealing and clamping range
- the inner sealing ring can be removed easily for larger cables

Temperature range	-40 °C / +200 °C (dynamic)
Protection grade	IP66 / IP67 / IP69
Test standard	EN 62444

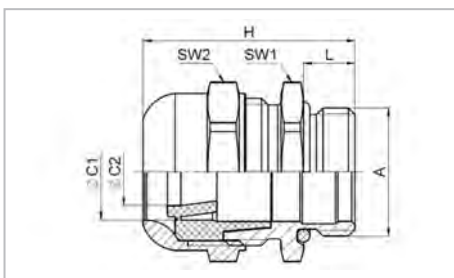

Features

Connecting thread standard length

A	∅C mm	∅C2 mm	∅C1 mm	 L mm	SW1 mm	SW2 mm	H mm		Part No.
M12x1,5	3 - 8	3 - 5	5 - 8	6,5	16	16	25,5	100	K155-1012-00
M16x1,5	5 - 10,5	5 - 7,5	7,5 - 10,5	7,0	20	20	31,5	100	K155-1016-00
M20x1,5	8 - 15	8 - 10,5	10,5 - 15	8,0	25	25	33	50	K155-1020-00
M25x1,5	14 - 20,5	14 - 15,5	15,5 - 20,5	8,0	32	32	35,5	50	K155-1025-00
M32x1,5	18 - 25,5	18 - 20,5	20,5 - 25,5	9,0	36	36	40,5	25	K155-1032-00
M40x1,5	24 - 33	24 - 29	29 - 33	9,0	45	45	43	10	K155-1040-00
M50x1,5	32 - 42	32 - 37,5	37,5 - 42	10,0	55	55	47,5	5	K155-1050-00
M63x1,5	40 - 53	40 - 46	46 - 53	10,0	70	70	53	5	K155-1063-00

Comment

Available as WADI heat EMC-cable gland, series K156-1xxx-zz.

TECHNICAL DATA:


Configuration

Dome nut	Stainless steel 1.4404 / AISI 316L
Sealing insert	Fluorine rubber FKM
Gland body	Stainless steel 1.4404 / AISI 316L
O-ring	Fluorine rubber FKM
Connecting thread	metric, as per EN 60423

Properties


- especially suitable for high temperature applications
- very good resistance to many chemicals
- very high UV, ozone and weather resistance
- large-area sealing protects the cable
- integrated anchorage with high retention
- wide sealing and clamping range
- the inner sealing ring can be removed easily for larger cables

Temperature range	-40 °C / +200 °C (dynamic)
Protection grade	IP66 / IP67 / IP69
Test standard	EN 62444

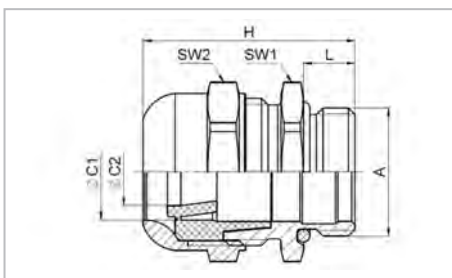

Features

Connecting thread standard length

A	∅C mm	∅C2 mm	∅C1 mm	$\frac{E}{L}$ L mm	SW1 mm	SW2 mm	H mm		Part No.
M12x1,5	3 - 8	3 - 5	5 - 8	6,5	16	16	25,5	100	K257-1012-00
M16x1,5	5 - 10,5	5 - 7,5	7,5 - 10,5	7,0	20	20	31,5	100	K257-1016-00
M20x1,5	8 - 15	8 - 10,5	10,5 - 15	8,0	25	25	33	50	K257-1020-00
M25x1,5	14 - 20,5	14 - 15,5	15,5 - 20,5	8,0	32	32	35,5	50	K257-1025-00
M32x1,5	18 - 25,5	18 - 20,5	20,5 - 25,5	9,0	36	36	40,5	25	K257-1032-00
M40x1,5	24 - 33	24 - 29	29 - 33	9,0	45	45	43	10	K257-1040-00
M50x1,5	32 - 42	32 - 37,5	37,5 - 42	10,0	55	55	47,5	5	K257-1050-00
M63x1,5	40 - 53	40 - 46	46 - 53	10,0	70	70	53	5	K257-1063-00

Comment

Available as WADI heat EMC-cable gland, series K258-1xxx-zz.