
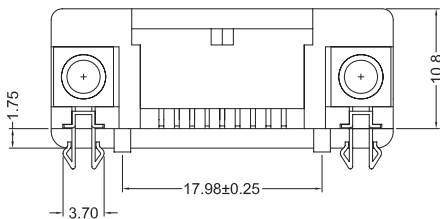
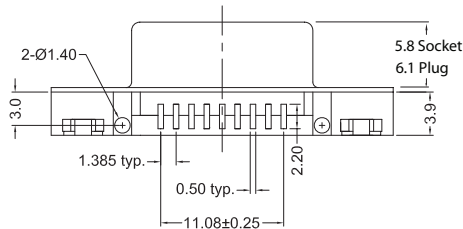


**K20XHT Series**  
**Right Angle Surface Mount**

Dimensions in mm

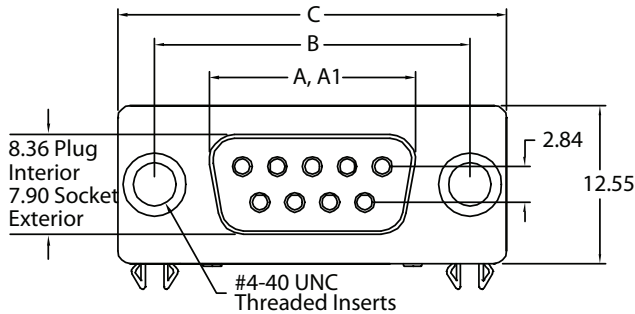

Shell Size	In mm	A	A1	B	C
9 (E)		.643 16.33	.666 16.92	.984 24.99	1.213 30.81
25 (B)		1.511 38.38	1.534 38.96	1.852 47.04	2.088 53.04

A = Exterior of Female Shell (S) A1 = Interior of Male Shell (P)

\*Contact factory for specifications. 888-KYCON-22


**D-SUBMINIATURE CONNECTORS**

**K20XHT Series**

Documentation & Ordering Information


Kycon Part #

Part Number Builder

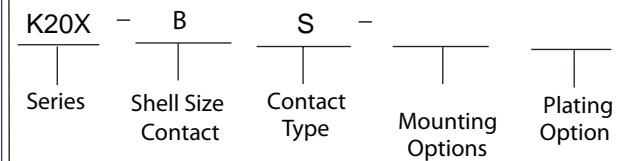

Series

K20XHT - D-Subminiature Connector, Right Angle,  
Ultra Short Footprint, Surface Mount,  
Reflow Compatible

Shell Size-Contact Option

E - 9 Contacts  
B - 25 Contacts

Contact Type

P - Pin Contact (Plug) Available only with E9 Shell Size option  
S - Socket Contact (Receptacle)

Mounting Option

H - With Top only grounding strap with Riveted Threaded Inserts  
L - With round Latch  
LJ - With round Latch and Jack screw  
N - With Board Locks and (4-40) Riveted Threaded Inserts  
NJ - With Board Locks, Riveted Threaded Inserts, and  
4-40 Hex. Jack Screws Assembled to Connector

Plating Option

Blank - Gold Flash  
15 - 15µ" Gold  
30 - 30µ" Gold

\*Contact Kycon for Other Options