



- NOTES:
1. FOR USE WITH RG-58, 58A & 58C U/CABLE.
 2. FOR CABLING INSTRUCTIONS SEE CP-2014.
 3. FOR CABLE TERMINATING USE KIT-17 & KIT-D-77.
 4. FOR FORMING USE CRIMP DIE SIZE O1.

MOUNTING HOLE



- UNLESS OTHERWISE SPECIFIED:
1. TOLERANCES: FRACTIONS & 0.00 DECIMALS & .004 ANGLES & 0° 30'
 2. REMOVE ALL BURRS, BREAK SHARP EDGES, .003 MAX. RADIUS ON ALL SHARP EDGES & DIMENSIONS MAY NOT EXCEED THE SUM OF THEIR TOLERANCES.
 3. NO FILLETS PERMITTED.
 4. SURFACE ROUGHNESS 32 MICROINCHES RMS MAX.
 5. ALL DIMENSIONS FROM TO FLATNESS.

DITZEN 18th Annual Training Volume 7711

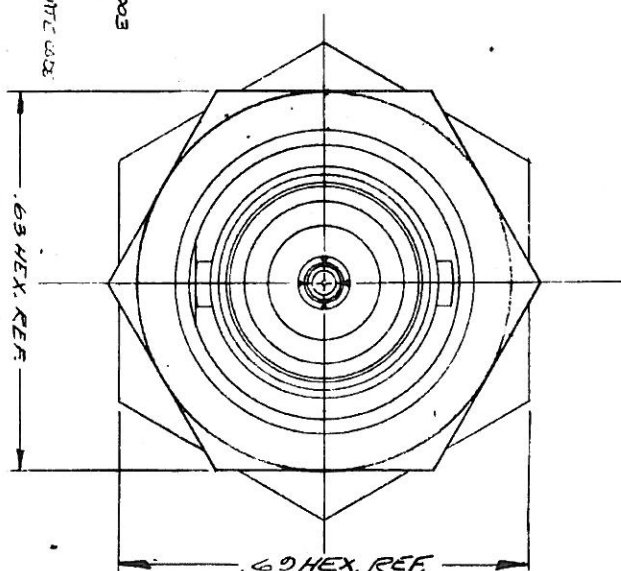

SD

M39012/19-0003

REVISIONS	
ISSUE	CHANGES
1	CN 23/3C/17 JUN 64
2	CN 54/0 A 27 OCT 67 K.S.H.
3	CN 77B9 C R.H.W. 18 JUL 69
4	CN 8396 C W.L.A. 17 MAR 70
5	CN 8525 C J.M. 5 MAY 70
6	CN 12601 A W.E. 5 AUG 75
7	CN 23168 E J.E.P. 30 MAR 82
8	CN 29151 D AMD 28 SEP 87
9	CN 32279 A L.M. 15 JUN 90

REF:	KC-19-50
FINISH:	SUPERSEDES
SPEC:	U6-1804/14
MATL:	
DRWN:	J.B.
DATE:	13 MAR 64
APPR:	JACK
DATE:	13 MAR 64
KINGS ELECTRONICS 40 MARLBOROUGH ROAD TUCKERHOLE N. 1	
M39012/19-0003	