


GSD

M39012/20-0502

REVISIONS

ISSUE	CHANGES
8	CN 34481 C REDRAWN JCA 06/07/93

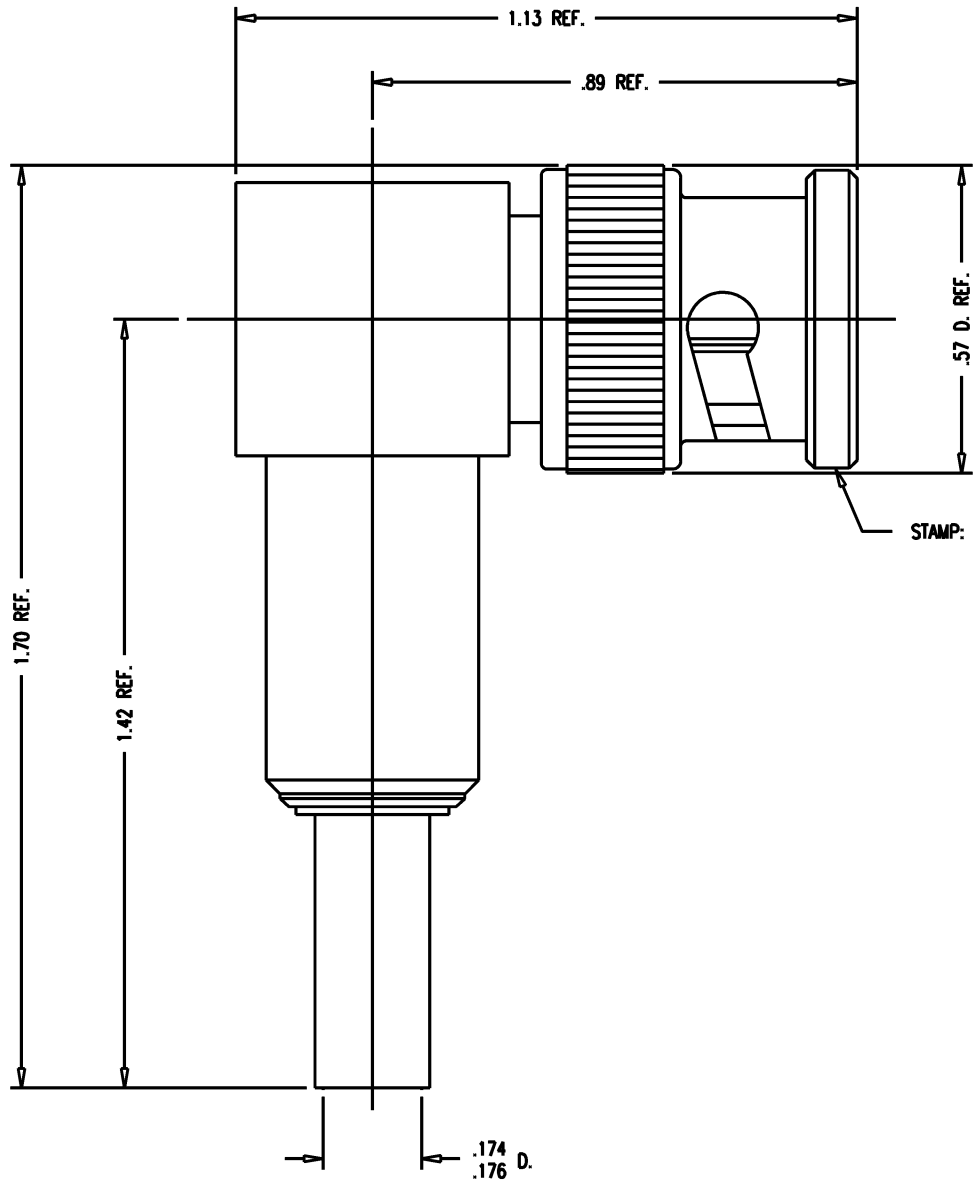

STAMP: 91836 M39012/20-0502
KC-59-418 XX XX (DATE CODE)

- NOTES:**
- FOR USE WITH RG-180/U CABLE.
 - FOR CABLING INSTRUCTIONS SEE CP-465.
 - FOR CABLE TRIMMING USE KTJ-113 AND KTD-166.
 - FOR CRIMPING USE DIE KTH-2007.
 - INTERFACE PER MIL-STD-348, FIG. 301-1.
 - CENTER CONTACT F TO BE SUPPLIED UNASSEMBLED.
 - MATERIALS:**
 INSULATORS-TEFLON, ASTM-D-1457
 GASKET-SILICONE RUBBER, ZZ-R-765
 SPRING WASHER }
 CENTER CONTACT } BER. COP., ASTM-B-196
 OUTER CONTACT }
 ALL OTHER METAL PARTS-BRASS, ASTM-B16
 - FINISHES:**
 CENTER CONTACTS-GOLD PLATE PER MIL-G-45204
 ALL OTHER METAL PARTS-SILVER PLATE PER QQ-S-365
 - ELECTRICAL CHARACTERISTICS:**
 NOMINAL IMPEDANCE-50 OHMS
 FREQUENCY RANGE-DC TO 4 GHZ
 WORKING VOLTAGE-500 VRMS

JCA3937

SCALE 4:1	
APPROX SURFACE AREA	
KC-59-418	
USED ON	
REF:	
PLUG, ANGLE, BNC	
DRAWN JCA	DATE 06/07/93
DESIGN MJB	DATE 07/23/93
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

M39012/20-0502

GSD