
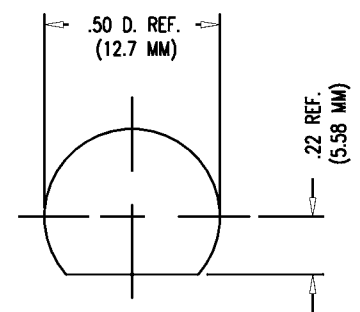
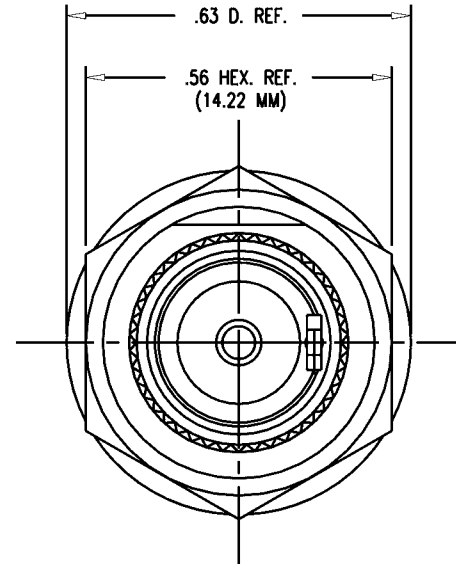


GSD

KC-79-197

REVISIONS

ISSUE	CHANGES
7	CN 32250 C JCA 06/04/90
8	CN 38656 C REDRAWN TML 09/26/03

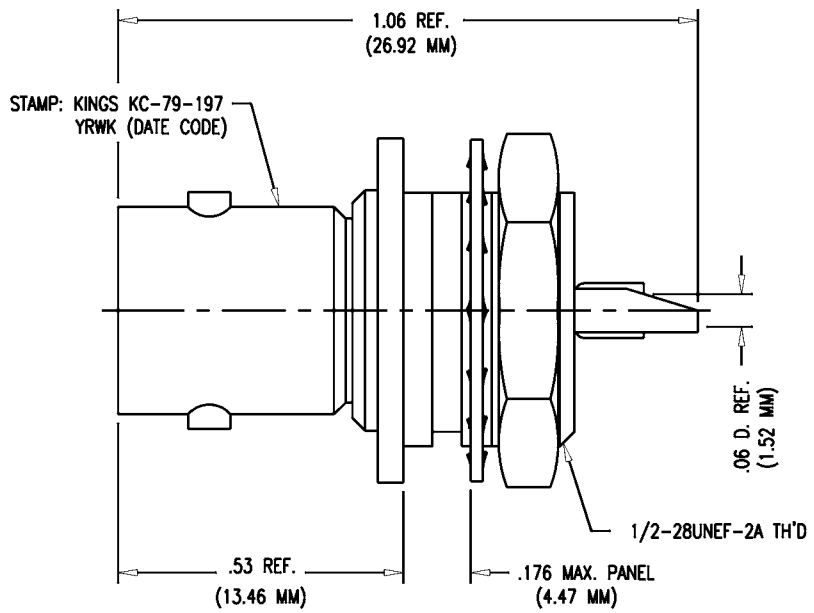

MOUNTING HOLE

GSD

NOTES:

1. INTERFACE PER MIL-STD-348, FIG. 301-2.
2. SAME AS KC-79-67 EXCEPT FINISH & MARKING.
3. MATERIALS:
 INSULATORS: TEFLON, ASTM-D-1457
 LOCKWASHER: PHOS. BRONZE, QQ-B-750
 CENTER CONTACT } BER. COP., ASTM-B-196
 LUG }
 ALL OTHER PARTS: BRASS, ASTM-B16
4. FINISHES:
 CENTER CONTACT: GOLD PLATE PER MIL-G-45204.
 ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
5. ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE: 50 OHMS
 VOLTAGE RATING: 500 VRMS
 FREQUENCY RANGE: DC TO 4 GHz
 DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS
 INSULATION RESISTANCE: 5000 MEGOHMS MIN.
 CONTACT RESISTANCE: CENTER-2.0 MILLIOHMS MAX.

SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF: TEKTRONIX 131-274-00-AG	
RECEPTACLE, ISOLATED GROUND, BNC	
DRAWN MASTTEN	DATE 03/17/82
DESIGN	DATE
APPR. MJB	DATE 03/19/82


 KINGS
 ELECTRONICS CO., INC.
 ROCK HILL, SOUTH CAROLINA 29730
 KC-79-197