
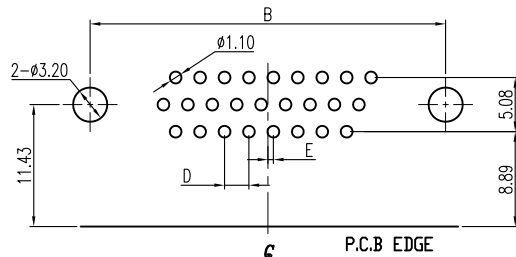
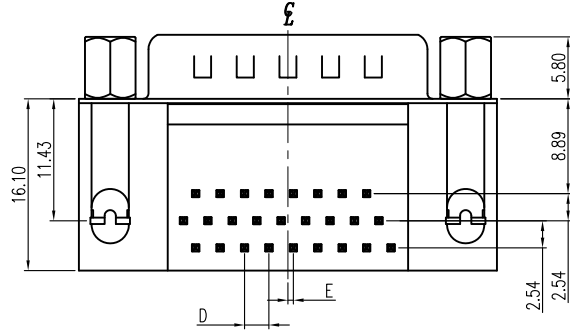


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

Customer drawing

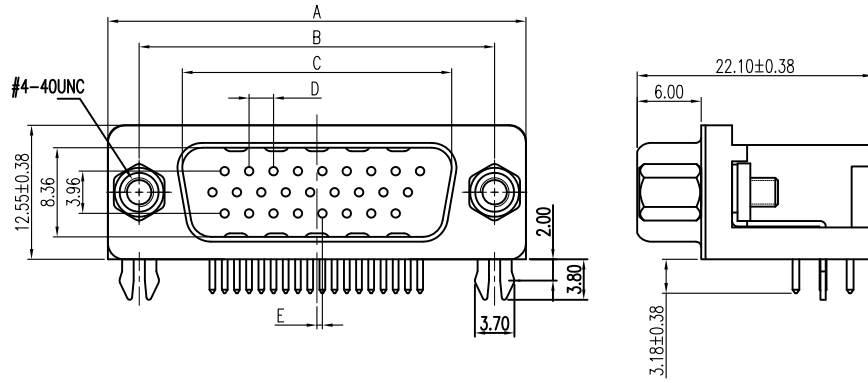

RECOMMENDED P.C.B. LAYOUT
TOLERANCE: ±0.05MM

NO.	A ±0.38	B ±0.25	C ±0.13	D ±0.13	E ±0.25
15P	30.81	24.99	16.92	2.29	0.25
26P	39.19	33.32	25.25	2.29	0.51
44P	53.04	47.04	38.96	2.29	0.51
62P	69.32	63.50	55.42	2.41	0.58




REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	HK--	First Release Drawing	06/03/13	IP
2	HK--	Change the shell plating to Nickel	07/07/15	IP
3	HK--	Update the drawing	06/30/17	IP

D-SUB TECHNICAL DATA

SHELL : SPCC, 80u" min nickel over 50u" min Copper
 BODY : PA9T UL 94V=0 Color: Black
 CONTACTS : Copper Alloy
 Gold over 50u" min nickel on mating area.
 100u" min tin over 50u" min nickel on solder area.
 BOARDLOCK: Copper alloy, Tin plated.
 SCREWLOCK: Copper alloy, Nickel plated.
 RIVET: Copper alloy, Nickel plated.
 ELECTRICAL : Voltage rating 250 V Rms Max.
 Current rating 3A.
 Withstanding Voltage >1000 V Rms
 Insulation resistance >1000 M Ohms
 Contact resistance 25 mOhms max.
 MARKING : Amphenol...(Series No.)
 Commercial reference
 Manufacturing date

PRODUCT CODE

L 17HT H X P 4F X C

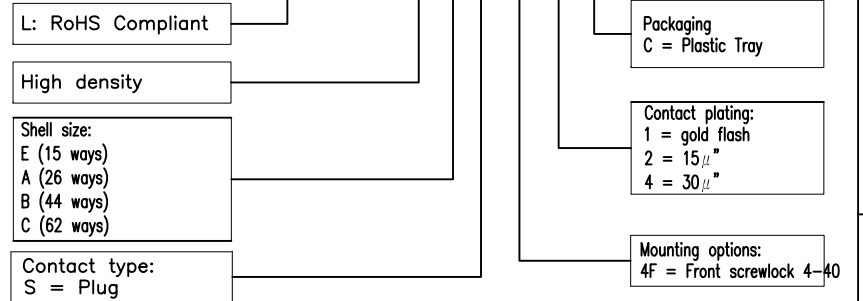

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE
U.S.	METRIC	DRAWN	Stemon Chen	07/28/17
.X +/-	0.50	CHECKED	Tony Tang	07/28/17
.XX +/-	0.30	CHECKED		
.XXX +/-	0.20			
FRACTIONS +/-	5'	DRAWING FILE :		
ANGLES +/-		ANGLE OF PROJECTION		
FOR MATERIALS AND FINISHES SEE NOTES				
REMOVE SHARP EDGES				
DIMENSIONS				
U.S. INCHES		MM		

Amphenol		
TITLE D-SUB connector, HTH Series		
SIZE	DRAWING NO.	REV.
A4	L17HTHP4FXC	3
SCALE	NONE	SHEET 1 OF 1