





Indicator Lights Neon, LED and Incandescent Lamp

Colours and voltages:

-  **Neon** Available with Red, Amber, Green or Clear lenses
100/130V (marked 110V), 200/250V (marked 230V)
-  **LED - DC** Red, Yellow, Green, Blue, White
2.0/2.2V Resistors for other voltages available.
-  **LED - AC** Red, Yellow, Green, Blue, White
110-230V ac operation.
-  **Incandescent lamp** Available with Red, Amber, Green, Clear or Blue
lenses 6V, 12/14V, 24/28V.

- ▶ Neon, LED, mains LED or filament lamp
- ▶ Bezel sizes from 6.7 to 16.3mm diameter
- ▶ Red, amber, green, blue and clear lenses
- ▶ Red, yellow, green, blue and white LEDs
- ▶ Wide choice of styles


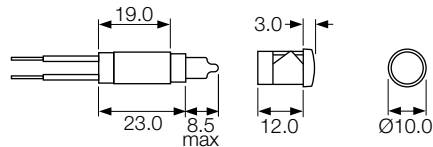

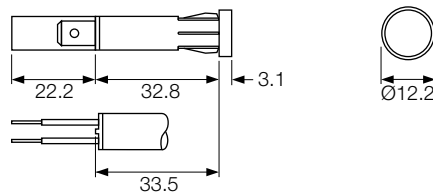

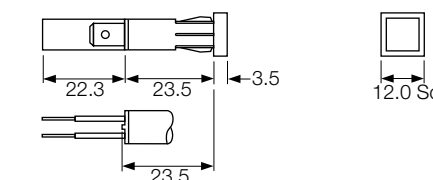

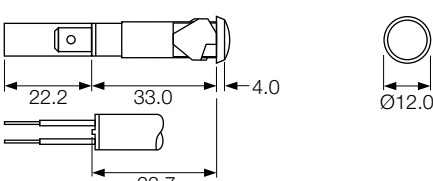

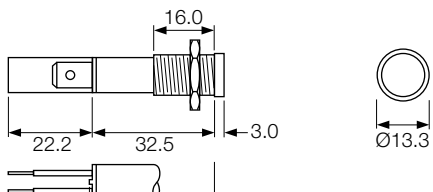
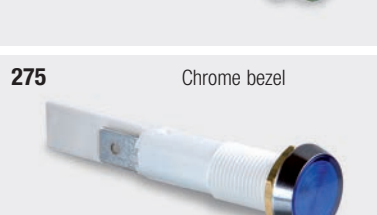
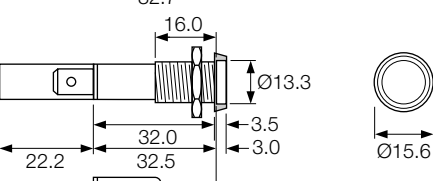


UL file E63363

Approvals shown for neon versions only



RoHS compliant

| SERIES | MODEL | TERM | PANEL & °C | DIMENSIONS (mm) |
|-------------|---|-------|------------|---|
| NL Neon |  | WL | 9.0 |  |
| LE LED (DC) | | | 0.8-2.5 | |
| LE LED (DC) | | | Call sales | |
| LE LED (AC) | | | | |
| NL Neon |  | WL | 9.0 |  |
| LE LED (DC) | | K 2.8 | 2.0 max | |
| LE LED (DC) | | H 4.8 | page 6 | |
| LE LED (AC) | | C 6.3 | | |
| NL Neon |  | WL | 9.0 |  |
| LE LED (DC) | | K 2.8 | 2.0 max | |
| LE LED (DC) | | H 4.8 | page 6 | |
| LE LED (AC) | | C 6.3 | | |
| FL Filament |  | WL | 9.5 |  |
| NL Neon | | K 2.8 | 0.8-2.8 | |
| LE LED (DC) | | H 4.8 | page 6 | |
| LE LED (AC) | | C 6.3 | | |
| FL Filament |  | WL | 10.0 |  |
| NL Neon | | K 2.8 | 12.0 max | |
| LE LED (DC) | | H 4.8 | page 6 | |
| LE LED (AC) | | C 6.3 | | |
| FL Filament |  | WL | 10.0 |  |
| NL Neon | | K 2.8 | 11.5 max | |
| LE LED (DC) | | H 4.8 | page 6 | |
| LE LED (AC) | | C 6.3 | | |

▶ **ORDER FORMAT** example



| SERIES | MODEL | TERM | PANEL & °C | DIMENSIONS (mm) |
|--------------------|-----------------------------|--------------|------------------------------|---|
| FL Filament | 276 | WL | 10.0 | |
| NL Neon | | K 2.8 | 2.8 max | |
| LE LED (DC) | | H 4.8 | | |
| LE LED (AC) | | C 6.3 | page 6 | |
| FL Filament | 277 Chrome bezel | WL | 10.0 | |
| NL Neon | | K 2.8 | 12.0 max | |
| LE LED (DC) | | H 4.8 | | |
| LE LED (AC) | | C 6.3 | page 6 | |
| FL Filament | 273 LL | WL | 10.0 | For sub-panel mounting, behind a facia. |
| NL Neon | | K 2.8 | 0.6-2.0 | |
| LE LED (DC) | | H 4.8 | | |
| LE LED (AC) | | C 6.3 | page 6 | |
| FL Filament | 2820 | WL | 12.0 | |
| NL Neon | | K 2.8 | 0.75-2.0 | |
| LE LED (DC) | | H 4.8 | | |
| LE LED (AC) | | C 6.3 | page 6 | |
| FL Filament | 2821 | WL | 12.0 or 12.7 | |
| NL Neon | | K 2.8 | $\varnothing 12.0 = 0.8-2.5$ | |
| LE LED (DC) | | H 4.8 | $\varnothing 12.7 = 1.1-2.5$ | |
| LE LED (AC) | | C 6.3 | page 6 | |
| FL Filament | 586 | WL | 12.5 | |
| NL Neon | | K 2.8 | | |
| LE LED (DC) | | H 4.8 | 0.8-1.5 | |
| LE LED (AC) | | C 6.3 | page 6 | |

Indicators