



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY.
4. RATING: 50mA, @ 12VDC
5. TRAVEL: 0.25±0.1mm
6. CONTACT RESISTANCE: 50mΩ MAX INITIAL.
7. MOS AND TTL COMPATABLE.
8. ELECTRICAL LIFE: 5,000,000 CYCLES MIN.
9. INSULATION RESISTANCE: 100MΩ MIN.
10. DIELECTRIC STRENGTH: 250VA
11. OPERATING TEMP: -30° C TO 85° C
12. CONTACTS: SILVER PLATED
- ▲ 13. OPERATING FORCE: 65± 20 gf
- ▲ 14. ▲ DENOTES CRITICAL PARAMETER.
15. PACKAGING: TAPE AND REEL, 1500 PIECES PER REEL

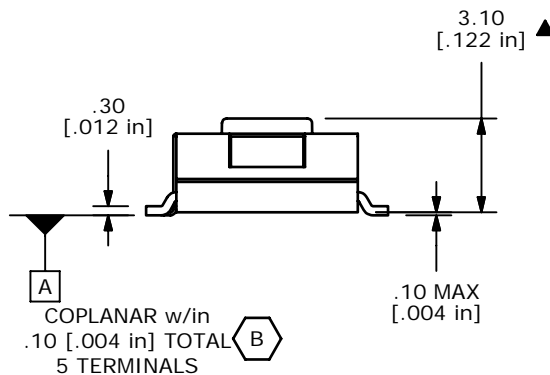

E-SWITCH®

B	16353	ADDED COPLANAR DIM. W/ NOTE	8/20/06	BO
A	15974	NEW PART RELEASE	4/18/06	CT
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE LLE3303F065QG				
SCALE	DATE	DR	DWG	REV
4:1	4/18/2006	CT	P090001	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED