


SectionAA'

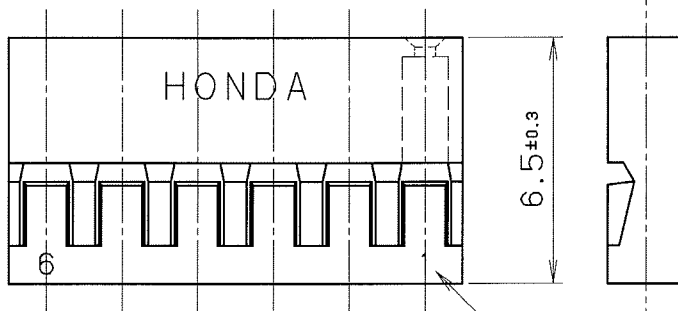

CONTACT NO. DISPLAY (Table1)

Table1. Dimensions A and B

n	A	B	CONTACT NO. DISPLAY
2	2	4	1, 2
3	4	6	1, 3
4	6	8	1, 4
6	10	12	1, 6
8	14	16	1
10	18	20	1, 10
12	22	24	1, 12
20	38	40	1, 10, 12

Table2. CRIMP SOCKET

CONTACT FINISH		COMPATIBLE WIRE
△ TIN PLATING	PART OF GOLD PLATING	
LPC-F104S (-R2)	LPC-F103S (-R2)	AWG# 32
LPC-F114S- (50, 500R)	LPC-F113S- (50, 500R)	
LPC-F104N (-R2)	LPC-F103N (-R2)	AWG# 28~32
LPC-F114N- (50, 500R)	LPC-F113N- (50, 500R)	
LPC-F104L (-R2)	LPC-F103L (-R2)	AWG# 22~26
LPC-F114L- (50, 500R)	LPC-F113L- (50, 500R)	

NOTE1. 'n' SHOWS NUMBER OF CONTACTS.

2. THE 8 POS. CONNECTOR CUTS AN INSULATOR AT THE 'B' SIZE PART AND MAKES A CONNECTOR.

△									
△	APR. 05. 2000	T. O	CHANGE OF CONTACT FINISH						
△	DEC. 05. 2000	K. N	CHANGE OF COMPATIBLE WIRE	INSULATOR	PPO	1		UL94V-0 BLACK	
LTR.	DATE	BY	REV. DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
	DATE		SCALE	UNIT	3RD. A. P	HONDA TSUSHIN KOGYO CO., LTD.			
	AUG. 07 (1991)		5/1	mm (INCH)					
	APP. DATE&REV.								
	DR.	DE.	CHK.	CHK.	APP.	NAME	FEMALE INSULATOR		
	T. Oda	T. Oda	-	G. Murokawa	N. Oshikawa	PART NO.	LPC- () FS01	REV.	2B