

Product Search Data Sheet

Note: This datasheet may be out of date. Please download the latest datasheet of LQM21PNR82MCH# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=LQM21PNR82MCH%23

References

"#" indicates a package specification code.

Low profile, excellent current bias characteristics

LQM21PNR82MCHD




0.5±0.2

< List of part numbers with package codes > LQM21PNR82MCHD LQM21PNR82MCHJ

LQM21PNR82MCHB







1.25±0.15

(in mm)

0.5±0.05

Packaging	Specifications	Standard Packing Quantity
D	180mm Paper Tape	3000
J	330mm Paper Tape	10000
В	Bulk(Bag)	1000

Mass (typ.)	
1 piece	0.007g



Notices

When rated current is applied to the products, inductance will be within ±30% of initial inductance value range. When rated current is applied to the products, the temperature rise caused by selfgenerated heat shall be limited to 40°C max. Keep the temperature (ambient temperature plus selfgeneration of heat) under 125°C.

1 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Rata Product Search Data Sheet

LQM21PNR82MCHD

Note: This datasheet may be out of date. Please download the latest datasheet of LQM21PNR82MCH# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=LQM21PNR82MCH%23

"#" indicates a package specification code.



Specifications

L size	2.0±0.15mm
W size	1.25±0.15mm
T size	0.5±0.05mm
Size code inch (mm)	0805 (2012)
Inductance	0.82µH±20%
Inductance Test Frequency	1MHz
Rated current (Isat) (Based on Inductance change)	0.7A(Max.) / 0.9A(Typ.)
Rated current (Itemp) (Based on Temperature rise)	1.3A(Max.) / 1.6A(Typ.)
Max. of DC resistance	0.163Ω
Class of magnetic shield	Ferrite Core
Self resonance frequency (min.)	60MHz
DC Resistance Intermediate Values	0.13Ω(typ.)
Operating Temperature Range	-40°C to 85°C
Series	LQM21PN_CH

2 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Product Search Data Sheet

LQM21PNR82MCHD


Note: This datasheet may be out of date. Please download the latest datasheet of LQM21PNR82MCH# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=LQM21PNR82MCH%23


"#" indicates a package specification code.




Characteristic Data

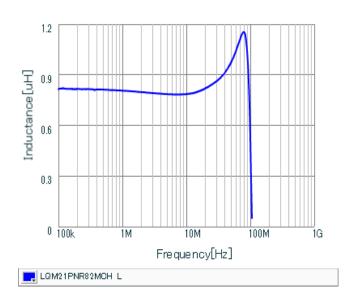

Inductance - Frequency Characteristics

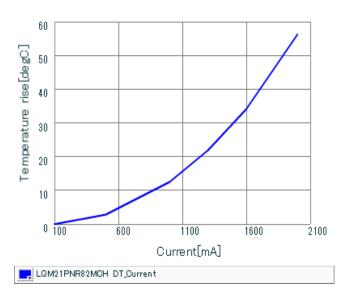

Temperature Increase Characteristic

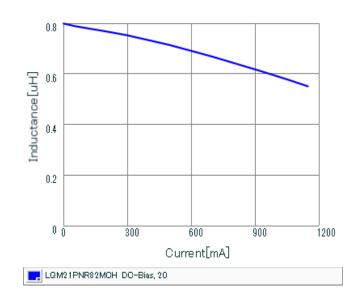

Impedance - Current Characteristics

3 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

