


LRD1510

TeSys LRD thermal overload relays - 4...6 A - class 20



Product availability: Stock - Normally stocked in distribution facility

Price*: 60.00 USD

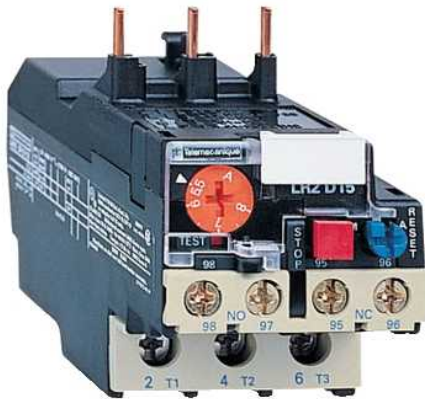

Main

Commercial Status	Commercialised
Range	TeSys
Product name	TeSys LRD
Product or component type	Differential thermal overload relay
Device short name	LRD
Relay application	Motor protection
Product compatibility	LC1D09 LC1D12 LC1D18 LC1D25 LC1D32
Network type	AC DC
Overload tripping class	Class 20 conforming to IEC 60947-4-1
Thermal protection adjustment range	4...6 A
[Ui] rated insulation voltage	690 V power circuit conforming to IEC 60947-4-1 600 V power circuit conforming to UL 600 V power circuit conforming to CSA

Complementary

Network frequency	0...400 Hz
Mounting support	Under contactor Rail with specific accessories Plate with specific accessories
Tripping threshold	1.14 +/- 0.06 I _r conforming to IEC 60947-4-1
[I _{th}] conventional free air thermal current	5 A for signalling circuit
Permissible current	0.1 A at 250 V DC-13 for signalling circuit 1.5 A at 240 V AC-15 for signalling circuit
System Voltage	690 V AC 0...400 Hz
[U _{imp}] rated impulse withstand voltage	6 kV
Phase failure sensitivity	Tripping current 130 % of I _r on two phase, the last one at 0
Control type	Blue push-button for reset mode Red push-button stop
Temperature compensation	-4...140 °F (-20...60 °C)

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein. *Prices are indicative

Connections - terminals	Power circuit: screw clamp terminals 1 cable(s) 0...0.01 in ² (1...6 mm ²) - cable stiffness: solid - without cable end Power circuit: screw clamp terminals 1 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: flexible - with cable end Power circuit: screw clamp terminals 1 cable(s) 0...0.02 in ² (1.5...10 mm ²) - cable stiffness: flexible - without cable end Control circuit: screw clamp terminals 2 cable(s) 0...0 in ² (1...2.5 mm ²) - cable stiffness: solid - without cable end Control circuit: screw clamp terminals 2 cable(s) 0...0 in ² (1...2.5 mm ²) - cable stiffness: flexible - with cable end Control circuit: screw clamp terminals 2 cable(s) 0...0 in ² (1...2.5 mm ²) - cable stiffness: flexible - without cable end
Tightening torque	Power circuit: 16.37 lbf.in (1.85 N.m) - on screw clamp terminals Control circuit: 15.04 lbf.in (1.7 N.m) - on screw clamp terminals
Width	1.77 in (45 mm)
Depth	3.62 in (92 mm)
Product weight	0.42 lb(US) (0.19 kg)

Environment

Standards	ATEX D 94/9/CE EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 508 CSA C22.2 No 14
Product certifications	ATEX INERIS BV CCC CSA DNV GL GOST RINA UL LROS
Protective treatment	TH conforming to IEC 60068
IP degree of protection	IP20 conforming to IEC 60529
Ambient air temperature for operation	-4...140 °F (-20...60 °C) without derating conforming to IEC 60947-4-1
Ambient air temperature for storage	-76...158 °F (-60...70 °C)
Fire resistance	1562 °F (850 °C) conforming to IEC 60695-2-1
Flame retardance	V1 conforming to UL 94
Mechanical robustness	Shocks 15 Gn for 11 ms IEC 60068-2-7 Vibrations 6 Gn IEC 60068-2-6
Dielectric strength	6 kVat 50 Hz conforming to IEC 60255-5

Ordering and shipping details

Category	22347 - CONTACTOR,D-LINE,OVERLOADS-NEW
Discount Schedule	I12
GTIN	00785901290841
Nbr. of units in pkg.	1
Package weight(Lbs)	0.50
Product availability	Stock - Normally stocked in distribution facility
Returnability	N
Country of origin	FR

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0631 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available Download Product Environmental Profile
Product end of life instructions	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------