



an INFINIT® brand

Level Transmitter, 0-15mH2O/OIL 4-20mA out, 11-28V, Stainless 304, 20m Polyethylene



LT989W Series IOT Pressure Sensors Technical Data Sheet

LT989W-15M20V1E22

Features

- Level range 0-15 meters
- Sensor housing IP68
- Isolated construction, enable to measure various media
- Stainless steel

Applications

- Industrial process control
- Liquid level measurement
- Chemical industries
- Water and Waste Management
- Mining

Description

LT989W-15M20V1E22 is a highly stable, reliable and fully sealed submersible level transmitter. LT989W-15M20V1E22 level transmitter comes in a compact size, and is lightweight and stable. It can be used to measure liquid levels for many applications in metallurgy, mining, chemicals, water supply and waste management.

Product Configuration

Application: Level Transmitter
 Pressure Type: Gauge

General Specifications

Description	Minimum	Typical	Maximum	Unit
Level Range	0		15	mH2O/OIL
Accuracy		±0.5		%Full Scale
Zero Thermal Error per °C		±0.02		% Full Scale/°C
Span Thermal Error per °C		±0.05		% Full Scale/°C
Long Term Stability		±0.2		%Full Scale/year
Overpressure		1.5		xFull Scale

Electrical Specifications

Description	Minimum	Typical	Maximum	Unit
Output Signal		4-20mA		
Power Supply/Excitation Level	11	24	28	VDC

Material Specifications

Description	Material
Diaphragm	Stainless Steel 316L
Plug Housing	Stainless Steel 304
Tubing	NBR



an INFINIT® brand

Level Transmitter, 0-15mH2O/OIL 4-20mA out, 11-28V, Stainless 304, 20m Polyethylene



LT989W Series IOT Pressure Sensors Technical Data Sheet

LT989W-15M20V1E22

O-Ring

Viton

Mechanical Specifications

Electrical Connection

Wire Color	2-Wire
Black	+V
Red	0V/+OUT
White	GND

Environmental Specifications

Temperature (Operating)	-10°C to 70°C
Temperature (Storage)	-20°C to 85°C
Certifications	ROHS Compliant
	CE Compliant


The Infinite Electronics portfolio includes coaxial cable assemblies, connectors, adapters and custom products, as well as our wireless product line which includes antennas, RF amplifiers, lightning and surge protectors, and NEMA rated enclosures.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume any liability arising out of the use of any part or documentation.

LT989W-15M20V1E22 CAD Drawing

Level Transmitter, 0-15mH2O/OIL 4-20mA out, 11-28V, Stainless 304, 20m Polyethylene

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/24/19	TOA

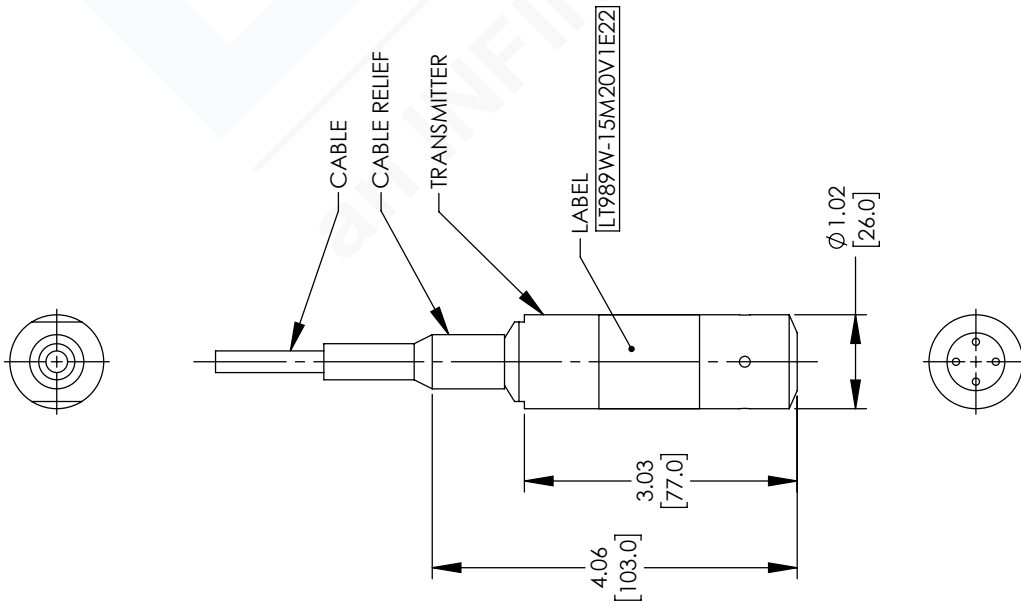

UNLESS OTHERWISE SPECIFIED LENGTH DIMENSIONS ARE IN INCHES DIMENSIONS IN [] ARE IN MILLIMETERS		THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF L-COM. ALL RIGHTS RESERVED.	
TOLERANCES: .X±.2 [5.08] FRACTIONS ± 1/32 .XX±.01 [.25] ANGLES ± 1° .XXX±.005 [.13]		SHEET 1 OF 1	
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.		SCALE N/A	
THIRD-ANGLE PROJECTION		www.L-com.com e-mail: CustomerService@L-com.com	
		SIZE [CAGE] PART NUMBER A 43321 LT989W-15M20V1E22	
DRAWN BY DZINN		REV A	

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.