



Fully Insulated Female Disconnect  
Part No: LVDDF1210T250A

SYM.	CHANGES	BY	DATE

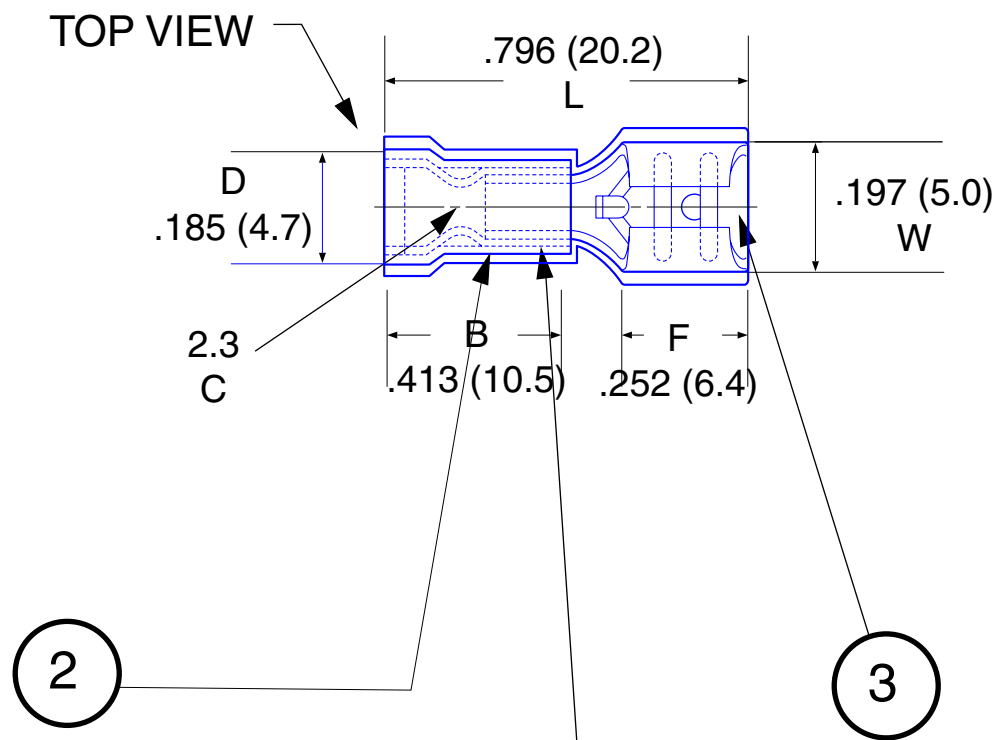

TIN PLATED COPPER INSULATION  
SUPPORT SLEEVE

TAPE ON  
REEL

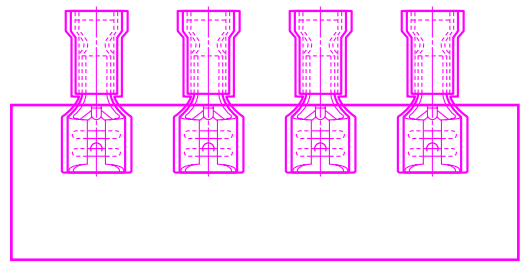

12/10 AWG

Thermal spec: 75° C  
Insulation Class: UL94V2  
Electrical Specs: 24 Amps, 300 Volts  
TOLERANCE ±.4  
Measurement units: inches (mm)

HOFFMAN CADFILE

NO.	1	2	3
NAME	TERMINAL	INSULATOR	TAB
MAT'L.	BRASS	VINYL	.250 X .032
REMARKS	TIN PLATED	YELLOW	
APPROVED BY:	CHECKED BY:	DRAWN BY:	

**HOFFMAN PRODUCTS**  
20700 Hubbell Avenue, Oak Park, MI 48237  
Tel: 1-800-645-2014 • Fax: 1-800-908-1295  
Web: www.hoffmanproducts.com

DATE:	TITLE: FULLY INSULATED FEMALE DISCONNECT	
SCALE: FREE	PART NO. LVDDF1210T250A	
DRAWING NO. H1520	PART NAME	ISSUE