


TO-5/.100 GRID

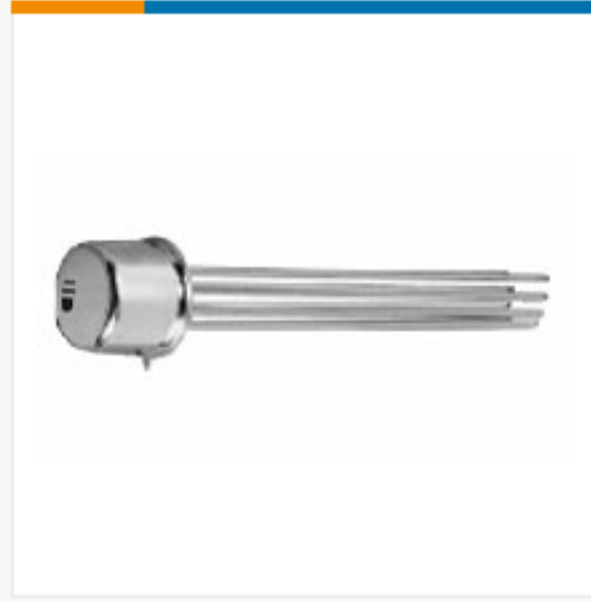

✓ Active

↓ [3D MODEL](#)

> [See All Documentation](#)

TE CONNECTIVITY

JMACD-26XPS = M39016/15-105P

JMACD-26XPS

TE Internal Number: 1-1617122-6
 Mil-Spec: M39016/15-105P

[Not EU RoHS or ELV Compliant](#)
[Find Compliant Alternatives](#)

Contact Arrangement **2 Form C, DPDT, 2 C/O**

Input Voltage(VDC) **26.5**

Coil Suppression Diode **With**

MOSFET Driver **Without**

Transistor Driver **Without**
 > [See All Features](#)

North America ▼

DISTRIBUTOR	QUANTITY	DATE AS OF
FLAME ENTERPRISES 800-854-2255	13	2015/08/26
ONLINE COMPONENTS 1-888-473-5297	2	2015/08/26

SAVE TO LIST	
CHECK FOR TOOLING	
FIND SIMILAR PRODUCTS	

DOCUMENTATION FEATURES

Please review product documents or [contact us](#) for the latest agency approval information.

Product Type Features	MOSFET Driver	Without
	Enclosure Type	Hermetically Sealed
	Product Type	Relay
	Relay Type	Military/Aerospace High Performance
Configuration Features	Transistor Driver	Without
Electrical Characteristics	Input Voltage(VDC)	26.5
	Coil Suppression Diode	With
	Coil Voltage(VDC)	26.5
	Coil Resistance(Ω)	1560
	Coil Power Rating (DC)(mW)	450
	Coil Polarity Protection Diode	Without
	Actuating System	DC
	Vibration	30G's, 10 – 3000Hz
	Coil Power Measurement	Milliwatts
	Coil Magnetic System	Non-Polarized, Monostable
	Shock	75G's, 6ms
Contact Features	Contact Arrangement	2 Form C, DPDT, 2 C/O
	Contact Current Rating(A)	1
	Pin Configuration	.2 x .3" Spreader Pad
	Contact Current Class	Low Level – 1 A
Termination Features	Termination Type	Long Leads
Mechanical Attachment	Mounting Type	Printed Circuit Board
Usage Conditions	Operating Temperature Range(°C)	-65 – 125
Product Compliance	Statement of Compliance PDF VIEW ALL PRODUCT COMPLIANCE	

COMPATIBLE

No compatible products found for JMADC-26XPS