


Crocodile clips

MA 1

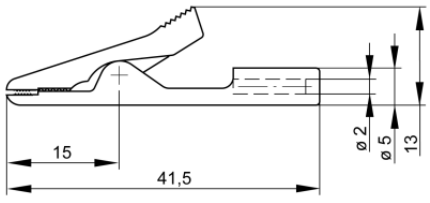

| Product | MA 1 |
|--|---|
| description | Miniature alligator clip with high strength insulation and nickel-plated brass/bronze jaws. The part of the jaws (fine wire section) allows a secure contact to be made when clamping even the thinner wire. Capable of clamping flat components (soldering eyes) and wire up to a maximum diameter of 4mm. |
| article-no. / *colour | 9303178xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">● 00 black</div> <div style="text-align: center;">● 01 red</div> <div style="text-align: center;">● 02 blue</div> <div style="text-align: center;">● 03 yellow</div> <div style="text-align: center;">● 04 green</div> <div style="text-align: center;">● 06 gray</div> <div style="text-align: center;">● 07 white</div> </div> <div style="text-align: right; margin-top: 5px;">Ni</div> |
| drawing |  |
| technical data | |
| connection | 2 mm socket |
| rated voltage ⁽¹⁾ | 30 VAC / 60 VDC |
| measurement cat. acc. to IEC 61010 | O ⁽³⁾ |
| rated current ⁽¹⁾ (consider derating curve) | 8 A |
| material socket | bronze, nickel plated |
| housing material | PP |
| temperature range acc. To IEC61010 ⁽²⁾ | -25 °C to +100 °C |
| inflammability class acc. to UL 94 (only valid for basic material of housing) | HB |
| clamping range | 4 mm |
| standard | IEC 61010 |

2 mm system

- ⁽¹⁾ for normal environmental conditions -5°C to +40°C
⁽²⁾ contact the manufacturer for applications at deviating temperature ranges
⁽³⁾ Other circuits that are not directly connected to mains
stand: 09.07.2018