

Closed End Connectors – Nylon Insulated (Steel Insert)




Product Number [†]	UPC (054007-)	Wire Range (AWG)	Copper Wire Combinations	L	Barrel Length	Barrel I.D.	Terminals per: Carton Case	
MN14CEC/STX*	49610	22-14	see chart below	0.76	0.31	0.091	100	500
MN14CEC/STK*	01316	22-14	see chart below	0.76	0.31	0.091	—	1000
MN10CEC/STX*	49635	18-10	see chart below	0.85	0.34	0.152	50	500
MN10CEC/STK*	01821	18-10	see chart below	0.85	0.34	0.152	—	1000

* ULListed and CSA Certified for use with TH-440 and TH-450 Crimping Tools.




MN14CEC/ST
22-14




MN10CEC/ST
18-10

Wire Range

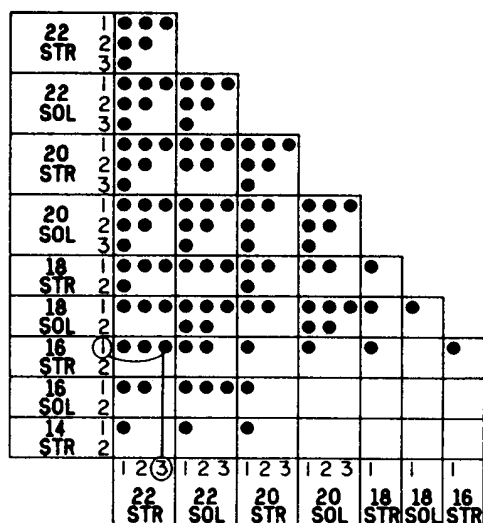

How to read chart for MN14CEC/ST:
One #16 Stranded plus three #22 Stranded (equaling four wires) can be connected using an MN14CEC/ST connector.

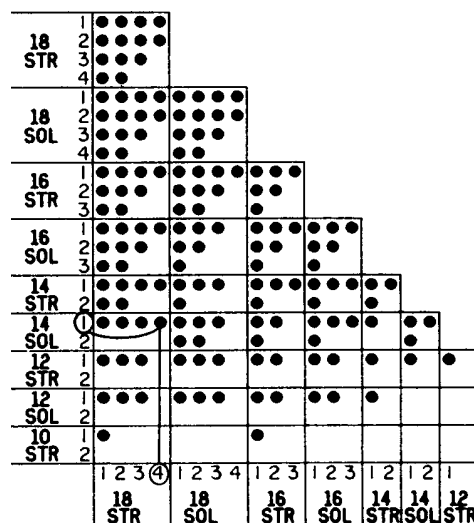

How to read chart for MN10CEC/ST:
One #14 Solid plus four #18 Stranded (equaling five wires) can be connected using an MN10CEC/ST connector.