

RF / Coaxial Cable Assembly

RPSMA Bulkhead Jack-to-MMCX Right Angle Plug, 200mm


multicomp PRO

RoHS Compliant



Electrical Performance:

| | |
|---------------------------------|----------------|
| Impedance | : 50Ω |
| Frequency Range | : DC ~ 6.0 Ghz |
| Working Voltage | : 170Vrms Max. |
| Dielectric Withstanding Voltage | : 500Vrms Max. |
| Insulator Resistance | : 1000MΩ Min. |

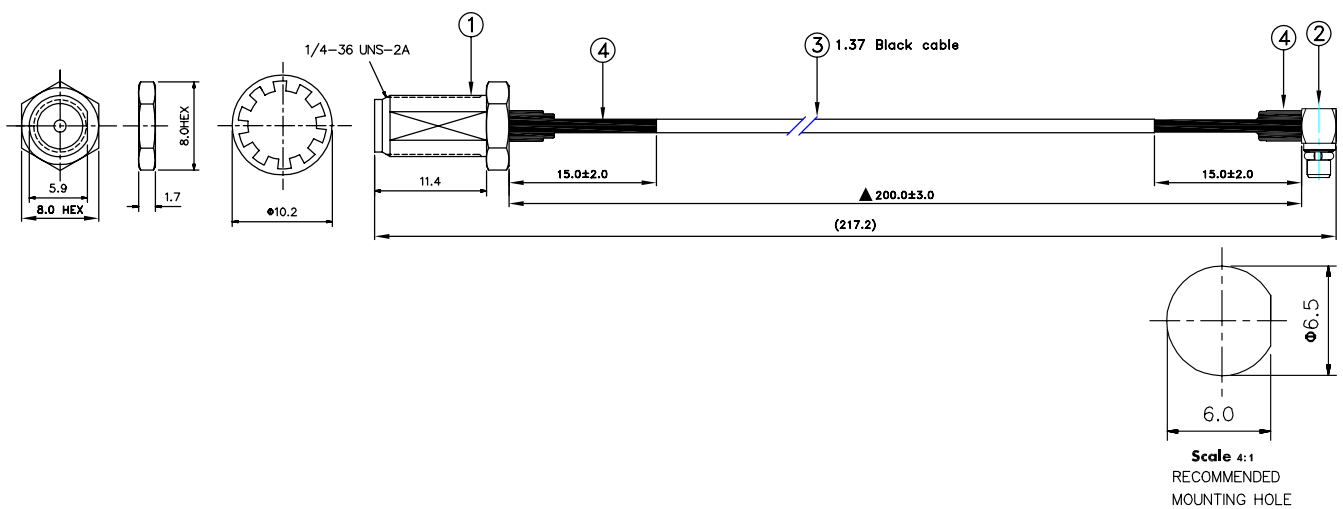


Dimensions : Millimetres


| Sl. | Description | Qty |
|-----|--|-----|
| 1 | RP-SMA B/H Jack Crimp for 1.37mm | 1 |
| 2 | MMCX Right Angle Plug for OD 1.37mm Cable | |
| 3 | 1.37mm Black Cable | |
| 4 | Heat Shrink Tube F32 Ø2.5mm L=15mm Colour: Black | |

| Specification | DC ~ 6.0 GHz |
|----------------|---------------|
| VSWR | 1.65 : 1 Max. |
| Insertion Loss | -1.5 dB Max. |


1 PCS/1PE BAG SIZE:4.5"x3.5"

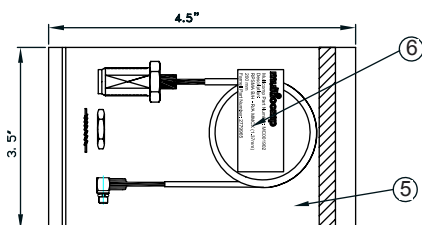

⑥ 3.5"x4.5" PE BAG LABEL SIZE:60x40mm

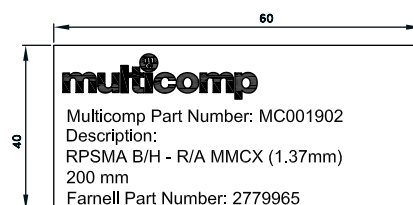

⑧ 11"x13" PE BAG LABEL SIZE:40x15mm



Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp PRO