


Cement Fixed Resistors

5 Watts

multicomp **PRO**

RoHS
Compliant




Features

- Self extinguishing
- Excellent flame and moisture resistance
- Extremely small sturdy and mechanical safe
- Product Type: Power Film Resistor
- Power Rating: 5 Watts
- Resistance Tolerance: $\pm 5\%$

Performance Specification

Temperature Coefficient	: $<20\Omega : \pm 400\text{PPM}/^\circ\text{C}; \geq 20 : \pm 350\text{PPM}/^\circ\text{C}$
Short-time Overload	: $\Delta R/R \leq \pm(5\% + 0.05\Omega)$, with no evidence of mechanical damage
Dielectric withstanding Voltage	: No evidence of flashover, mechanical damage, arcing or insulation breakdown
Terminal Strength	: No evidence of mechanical damage.
Solderability	: Min. 95% coverage
Temperature Cycling	: $\Delta R/R \leq \pm(2\% + 0.05\Omega)$, with no evidence of mechanical damage
Humidity (Steady State)	: $\Delta R/R \leq \pm(5\% + 0.05\Omega)$, with no evidence of mechanical damage
Load life in Humidity	: For Wire-wound range, the $\Delta R/R$ is $\pm 5\%$ For Power film range, $<100\text{k}\Omega$, the $\Delta R/R$ is $\pm 5\%$ For Power film range, $\geq 100\text{k}\Omega$, the $\Delta R/R$ is $\pm 10\%$
Load life	: For Wire-wound range, the $\Delta R/R$ is $\pm 5\%$ For Power film range, $<100\text{k}\Omega$, the $\Delta R/R$ is $\pm 5\%$ For Power film range, $\geq 100\text{k}\Omega$, the $\Delta R/R$ is $\pm 10\%$
Resistance to solderability heat	: $\Delta R/R \pm(1\% + 0.05\Omega)$ with no evidence of mechanical damage

Diagram

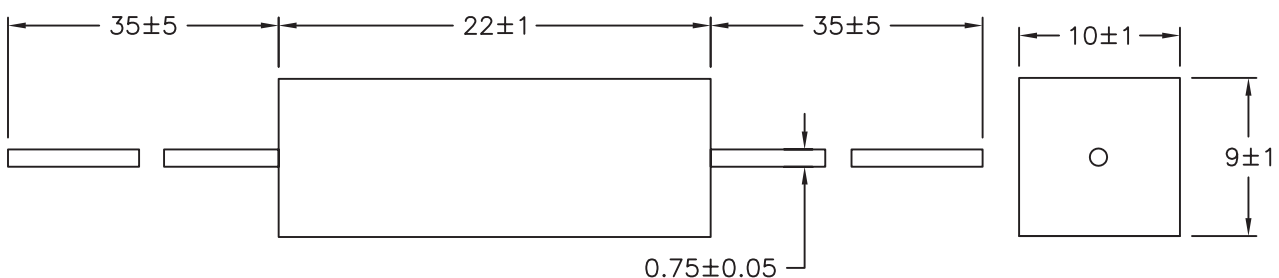

Dimensions : Millimetres


Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp **PRO**


Cement Fixed Resistors

5 Watts

Derating Curve

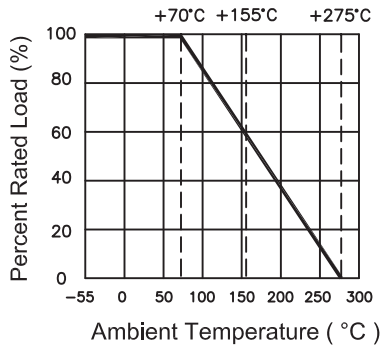

Heat Rise Chart

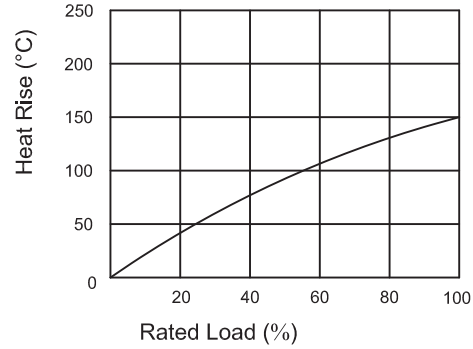

Part Number Table

Description	Resistance Ω	Part Number
Cement Fixed Resistors, 5 Watts, $\pm 5\%$	2k	MCPRW05WJP202B00
	300	MCPRW05WJP301B00
	3k	MCPRW05WJP302B00
	330	MCPRW05WJP331B00
	3.3k	MCPRW05WJP332B00
	33k	MCPRW05WJP333B00
	36k	MCPRW05WJP363B00
	390	MCPRW05WJP391B00
	3.9k	MCPRW05WJP392B00
	39k	MCPRW05WJP393B00
	430	MCPRW05WJP431B00
	43k	MCPRW05WJP433B00

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.