


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 200 LBS. [889 NEWTONS]
WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS
AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
 .XXX = ±.010 [.25]
 .XX = ±.02 [.5]
 .X = ±.03 [.8]
 ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL

| PANDUIT PART NO. | MAX BUNDLE DIAMETER | PACKAGE QTY | LENGTH L=±.3 [7] |
|------------------|---------------------|-------------|-----------------------|
| MLT1S-CP316 | 1" [25] | 100 | 5.0" [127] |
| MLT2S-CP316 | 2" [51] | 100 | 7.9" [201] |
| MLT2.7S-CP316 | 2.7" [69] | 100 | 10.2" [259] |
| MLT4S-CP316 | 4" [102] | 100 | 14.3" [362] |
| MLT6S-CP316 | 6" [152] | 100 | 20.5" [521] |
| MLT8S-CP316 | 8" [203] | 100 | 26.8" [679] |
| MLT10S-CP316 | 10" [254] | 100 | 33.0" [838] |

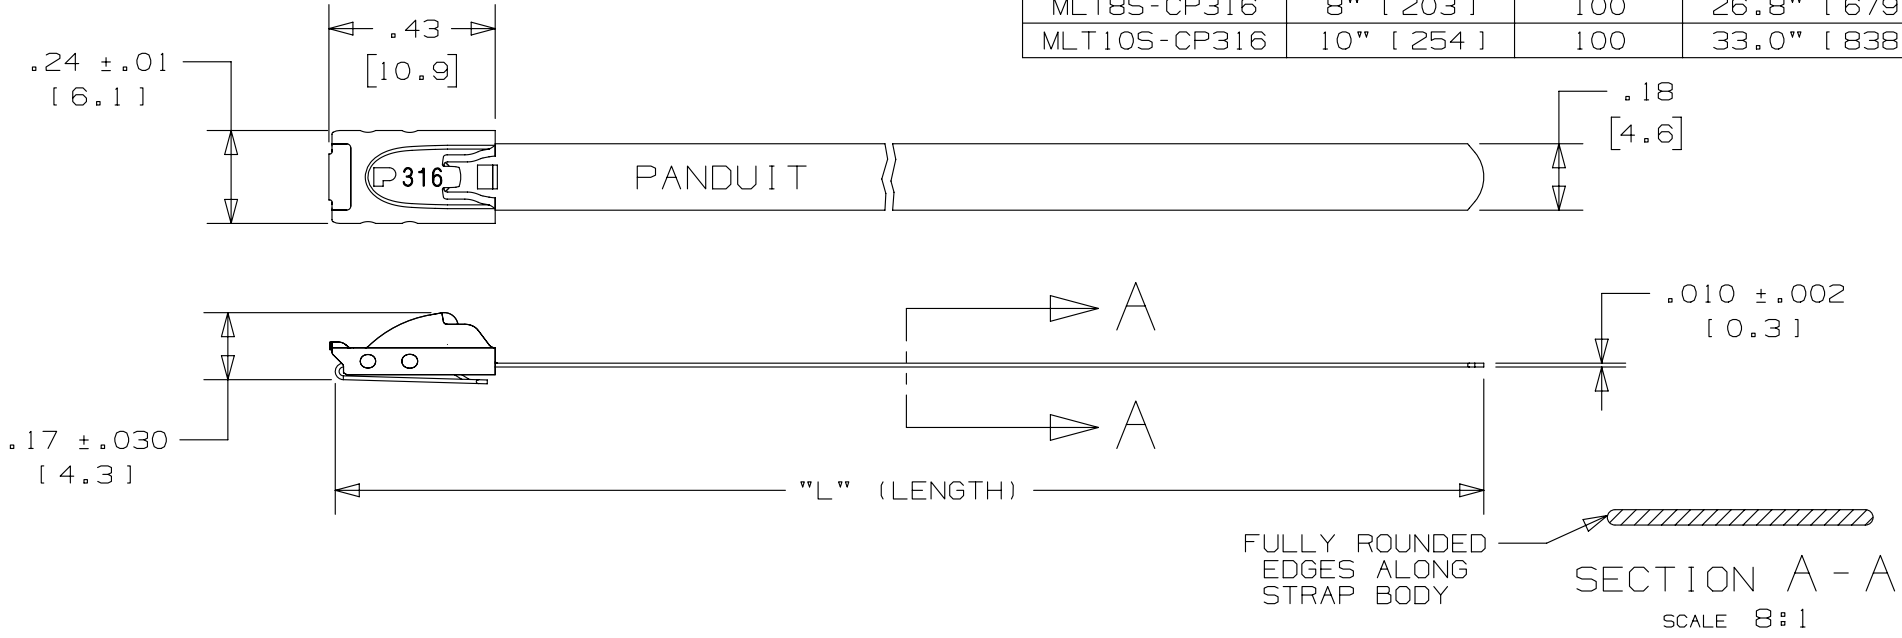

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|-----|------|------|------|------|--|------------|
| 09A | 3/13 | JAMB | MIM | RGRO | UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO | SSECN01037 |
| 08A | 2/12 | MIM | RGRO | --- | NOTE: #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY | ----- |

| | | | | |
|--|------|--|-------|------|
| TITLE | | METAL LOCKING TIE STANDARD SERIES 316 STAINLESS STEEL | | |
| CUSTOMER DRAWING | | | | |
| ITEM REVISION NAME | | N41120BS/09 | | |
| DATASET FILE NAME | | N41120BS_DC/09A | | |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] | | MATERIAL: 316 STAINLESS STEEL | | |
| .x ± .1 [2.54] .xx ± .01 [.25] | | .xxx ± .005 [.127] ANGLES ± 5° | | |
| THIRD ANGLE PROJECTION | | DRAWING NUMBER: N41120BS_DC | | |
| DRAWN BY | DATE | CHK | SCALE | SIZE |
| JAMB | 2/12 | DPN | 2:1 | A |
| SHT 1 OF 1 | | | | |