

## Interactive Catalog Supplements Catalog PDFs

If you need detailed product information, or help choosing the right product for your application, see our [Interactive Catalog](#). Use the [Interactive Catalog](#) to access the most complete and up-to-date information available.

The [Interactive Catalog](#) provides an extensive collection of product specifications, application data, and technical literature that can be searched based on criteria you select.

This PDF catalog information was published in November 2000.



Sensing and Control  
[Interactive Catalog...](#)

**Click this icon to try  
the Interactive Catalog.**

---

### Sensing and Control

Honeywell Inc.

11 West Spring Street

Freeport, IL 61032

# Manual Switches

## Indicators/Pushbutton Style

MML41/46 Series

### LED OR INCANDESCENT DISPLAY



PWB Mount



Panel Mount


### FEATURES

- Accepts one LED or incandescent lamp

MML41 indicators resemble a pushbutton switch with the button in the "down" position.

### MML41 ORDER GUIDE

Catalog listing codes for indicator, less assembled display options

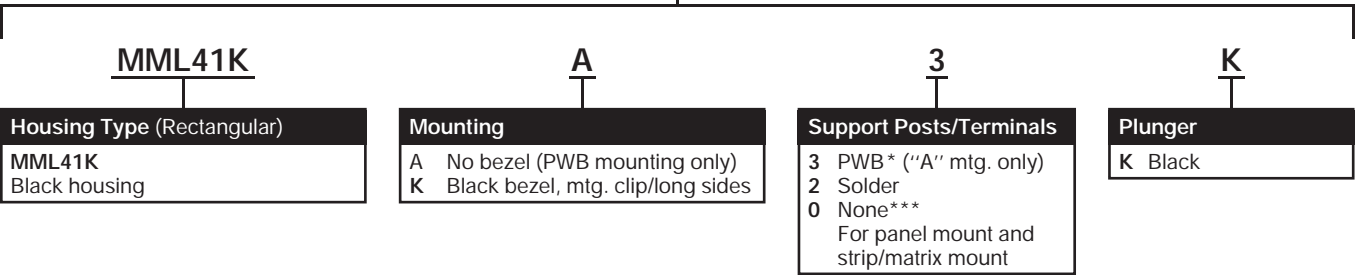

# Indicators/Flush Mount

## MML46

### LED OR INCANDESCENT DISPLAY



PWB Mount



Panel Mount



PWB Mount




Panel Mount

### FEATURES

- Accepts one or two LEDs or incandescent lamps
- Bezels and mounting clips, LEDs and legended lenses can be furnished installed or ordered separately

### MML46 ORDER GUIDE

Catalog listing codes for indicator, less assembled display options

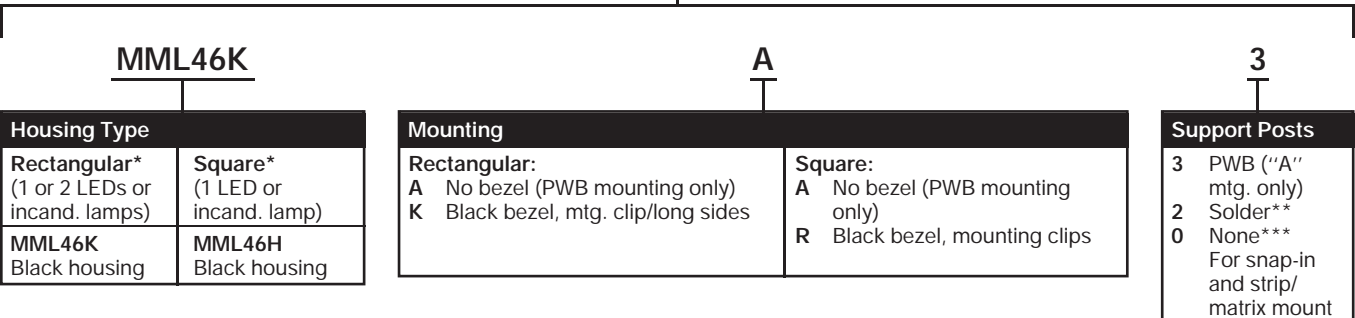

\*\* Rectangular housings only.  
\*\*\* No LEDs allowed.

\* Notes:  
1. When an LED is specified in a rectangular MML46 listing, MICRO SWITCH will permanently install it in the housing.  
2. MICRO SWITCH does **not** permanently install an LED in a square MML46 listing. To install an LED in a square housing, order a MML93L or MML93G receptacle and a MML92 LED (see pages 74 and 76).

# Manual Switches

## Indicators/Pushbutton Style

**Example: MML41KA3K**  
 Pushbutton style indicator housing (black); no bezel; support posts; black plunger.

**Example: MML41KA3KRSR**  
 As above, except furnished with one red LED and red lens.

Electrical Data	page 57
Lenses	page 68
Bezels	page 72
LEDs/Lamps	pages 73/75
Strip and matrix mounting	page 71
Mounting dimensions	pages 80/82/83
PWB pin locations	pages 80/84

Order display options assembled to indicator by adding codes below

<b>RS</b>	<b>DR</b>	Leave this space blank if legend not desired																						
<b>LED (Stanley type)</b>	<b>Lens</b>	<b>Legend</b>																						
<table border="0" style="width: 100%;"> <tr> <td><b>XX</b> None</td> <td></td> </tr> <tr> <td><b>RS</b> Red</td> <td></td> </tr> <tr> <td><b>YS</b> Yellow</td> <td></td> </tr> <tr> <td><b>GS</b> Green</td> <td></td> </tr> </table>	<b>XX</b> None		<b>RS</b> Red		<b>YS</b> Yellow		<b>GS</b> Green		<table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">For LED display:</td> <td style="width: 50%;">For incandescent or non-lighted display:*</td> </tr> <tr> <td><b>DR</b> Red</td> <td><b>LR</b> Red</td> </tr> <tr> <td><b>DY</b> Yellow</td> <td><b>LY</b> Yellow</td> </tr> <tr> <td><b>DG</b> Green</td> <td><b>LG</b> Green</td> </tr> <tr> <td></td> <td><b>LW</b> White</td> </tr> <tr> <td></td> <td><b>LK</b> Black</td> </tr> </table>	For LED display:	For incandescent or non-lighted display:*	<b>DR</b> Red	<b>LR</b> Red	<b>DY</b> Yellow	<b>LY</b> Yellow	<b>DG</b> Green	<b>LG</b> Green		<b>LW</b> White		<b>LK</b> Black	<table border="0" style="width: 100%;"> <tr> <td><b>20</b> With legend</td> </tr> <tr> <td>Use Legend Order Sheet FO-74024 to cover each catalog listing (see page 69).                      Note: If legend is not desired, leave this space blank.</td> </tr> </table>	<b>20</b> With legend	Use Legend Order Sheet FO-74024 to cover each catalog listing (see page 69). Note: If legend is not desired, leave this space blank.
<b>XX</b> None																								
<b>RS</b> Red																								
<b>YS</b> Yellow																								
<b>GS</b> Green																								
For LED display:	For incandescent or non-lighted display:*																							
<b>DR</b> Red	<b>LR</b> Red																							
<b>DY</b> Yellow	<b>LY</b> Yellow																							
<b>DG</b> Green	<b>LG</b> Green																							
	<b>LW</b> White																							
	<b>LK</b> Black																							
<b>20</b> With legend																								
Use Legend Order Sheet FO-74024 to cover each catalog listing (see page 69). Note: If legend is not desired, leave this space blank.																								

**Example: MML46KA3**  
 Indicator housing, rectangular (black); no bezel; support terminals.

**Example: MML46KA3RSXXDR20**  
 As above, except furnished with red LED and red lens, with legend.

\* When ordering incandescent or non lighted display, LED field must be XX.

**CUSTOMER INSTALLATION:**

**LED**


- Order LED and receptacle, page 73.
- Installation instructions, pages 74/76.

**Incandescent Lamp**


- Order lamp/PWB receptacle or lamp/solder receptacle, page 75.
- Installation instructions, page 76.

**LED TERMINATION**

If LEDs are to be permanently installed by MICRO SWITCH, please indicate by either a **2** (solder) or a **3** (PWB) for the Support Posts listing code. With MICRO SWITCH identification to the rear, the longest lead (+) anode will be to the left, closest to the double-pole circuit or support terminals.



Style 2



Style 3

Manuals

Order display options assembled to indicator by adding codes below

<b>RSXX</b>	<b>DR</b>	Leave this space blank if legend not desired <b>20</b>																								
<b>LED (Stanley type)</b>	<b>Lens</b>	<b>Legend</b>																								
<p>Available in rectangular housings only.</p> <table border="0" style="width: 100%;"> <tr> <td colspan="2"><b>XXXX</b> No LED</td> </tr> <tr> <td>One LED*:</td> <td>Two LEDs:</td> </tr> <tr> <td><b>RSXX</b> Red</td> <td><b>RSRS</b> Red</td> </tr> <tr> <td><b>YSXX</b> Yellow</td> <td><b>YSYS</b> Yellow</td> </tr> <tr> <td><b>GSXX</b> Green</td> <td><b>GSGS</b> Green</td> </tr> </table>	<b>XXXX</b> No LED		One LED*:	Two LEDs:	<b>RSXX</b> Red	<b>RSRS</b> Red	<b>YSXX</b> Yellow	<b>YSYS</b> Yellow	<b>GSXX</b> Green	<b>GSGS</b> Green	<table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">For LED display:</td> <td style="width: 50%;">For incandescent or non-lighted display:*</td> </tr> <tr> <td><b>DR</b> Red</td> <td><b>LR</b> Red</td> </tr> <tr> <td><b>DY</b> Yellow</td> <td><b>LY</b> Yellow</td> </tr> <tr> <td><b>DG</b> Green</td> <td><b>LG</b> Green</td> </tr> <tr> <td></td> <td><b>LW</b> White</td> </tr> <tr> <td></td> <td><b>LK</b> Black</td> </tr> </table>	For LED display:	For incandescent or non-lighted display:*	<b>DR</b> Red	<b>LR</b> Red	<b>DY</b> Yellow	<b>LY</b> Yellow	<b>DG</b> Green	<b>LG</b> Green		<b>LW</b> White		<b>LK</b> Black	<table border="0" style="width: 100%;"> <tr> <td><b>20</b> With legend</td> </tr> <tr> <td>Use Legend Order Sheet FO-74024 to cover each catalog listing.</td> </tr> </table>	<b>20</b> With legend	Use Legend Order Sheet FO-74024 to cover each catalog listing.
<b>XXXX</b> No LED																										
One LED*:	Two LEDs:																									
<b>RSXX</b> Red	<b>RSRS</b> Red																									
<b>YSXX</b> Yellow	<b>YSYS</b> Yellow																									
<b>GSXX</b> Green	<b>GSGS</b> Green																									
For LED display:	For incandescent or non-lighted display:*																									
<b>DR</b> Red	<b>LR</b> Red																									
<b>DY</b> Yellow	<b>LY</b> Yellow																									
<b>DG</b> Green	<b>LG</b> Green																									
	<b>LW</b> White																									
	<b>LK</b> Black																									
<b>20</b> With legend																										
Use Legend Order Sheet FO-74024 to cover each catalog listing.																										

Square housings accept only one LED. Only a two-character LED code is necessary.  
 Example: MML46HR0XXDY.

\* When ordering incandescent or non-lighted display, LED field must be XXXX.