

120W AC to DC Enclosed Switching Power Supply

multicomp PRO

**RoHS
Compliant**



Features

- Universal 85V AC to 264V AC or 120V DC to 370V DC input voltage
- Operating ambient temperature range: -40°C to +85°C
- Active PFC
- High I/O isolation test voltage up to 4000V AC
- Operating altitude up to 5000m
- Extremely low leakage current < 0.1mA
- Stand-by power consumption < 0.3W
- The base plate with conformal coating
- Output short circuit, over-current, over-voltage, over-temperature protection
- Efficiency up to 95%
- Installing in system of Safety Class I/II is available
- Safety according to IEC/EN/UL62368-1, IEC/EN60335-1, IEC/EN61558-1, GB4943-1, IEC/EN/ES60601-1(2 × MOPP)

These series is one of enclosed AC-DC switching power supply and suitable for all kinds of BF type (be accessible to patients) medical system equipment. It features universal AC input and at the same time accepts DC input voltage, cost-effective, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC and safety performance, which meet IEC/EN/UL62368, GB4943, IEC/EN60335, IEC/EN61558, IEC/EN/ES60601 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home, medical, etc.

Selection Guide

Part Number	Nominal Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Transient Output Power*10S (W)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (µF)
MPOF120-20B12-C	114	12V/9.5A	141.6	11.4-12.6	94	6000
MPOF120-20B15-C	114	15V/7.6A	142.5	14.3-15.8	94	5000
MPOF120-20B24-C	120	24V/5A	150	22.8-25.2	95	3200
MPOF120-20B27-C	119.9	27V/4.44A	149.8	25.6-28.4	95	2400
MPOF120-20B48-C	120	48V/2.5A	150	45.6-50.4	94.5	1600

Note: *If the total output power exceeds the nominal output power, it can be maintained for a maximum of 10s. The power supply cannot exceed the transient power. When the output voltage is increased, the total output power cannot exceed the nominal output power.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input		85	--	264	VAC
	DC input		120	--	370	VDC
Input Voltage Frequency			47	--	63	Hz
Input Current	115VAC		--	--	2	A
	230VAC		--	--	1	
Inrush Current	115VAC	Cold start	--	40	--	
	230VAC		--	75	--	
Power Factor	115VAC	Full Load	0.98	--	--	--
	230VAC		0.94	--	--	
Leakage Current	240VAC	< 0.1mA; Single fault < 0.5mA				
Hot Plug	Unavailable					

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp PRO

120W AC to DC Enclosed Switching Power Supply

multicomp PRO

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Accuracy*	Full load range	12V/15V	--	±2.0	--	%
		24V/27V/48V	--	±1.0	--	
Line Regulation	Rated load	--	±0.5	--		
Load Regulation	0% - 100% load	--	±1.0	--		
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	12V/15V	--	-	120	mV
		24V/27V	--	-	150	
		48V	--	-	200	
Temperature Coefficient		--	±0.03	--	%/°C	
Minimum Load		0	--	--	%	
Hold-up Time	230VAC	15	--	--	ms	
Stand-by Power Consumption		--	--	0.3	W	
Short Circuit Protection	Recovery time < 3s after the short circuit disappear.	Hiccup, continuous, self-recovery				
Over-current Protection		≥130% Io, hiccup, self-recovery				
Over-voltage Protection	12V	≤16V (Output voltage turn off, re-power on for recover)				
	15V	≤25V (Output voltage turn off, re-power on for recover)				
	24V	≤32V (Output voltage turn off, re-power on for recover)				
	27V	≤35V (Output voltage turn off, re-power on for recover)				
	48V	≤60V (Output voltage turn off, re-power on for recover)				
Over-temperature Protection		Output voltage turn off, re-power on to recovery after abnormal removed				
<p>Note: 1. *Output voltage accuracy: including the setting error, line regulation, load regulation; 2. *The "Tip and barrel method" is used for ripple and noise test, output parallel 10uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to AC-DC Converter Application Notes for specific information; 3. *For all the above test items, please refer to our company standard "AC-DC Black Box Test Specification" for specific test specifications and methods; 4. *Except for special instructions, the above data are measured at the full operating temperature range and humidity <75%.</p>						

120W AC to DC Enclosed Switching Power Supply

multicomp PRO

General Specifications							
Item		Operating Conditions		Min.	Typ.	Max.	Unit
Isolation Test	Input - \perp	Electric strength test for 1min., leakage current <5mA		1500	-	--	VAC
	Input - output			4000		--	
	Output - \perp			500		--	
Insulation Resistance	Input - \perp	Ambient temperature: 25 ± 5°C		100	-	--	MΩ
	Input - output	Relative humidity: < 95%RH, no condensation		100		--	
	Output - \perp	Test voltage: 500V DC		100		--	
Isolation level	Input - output			2 × MOPP			
	Input - \perp			1 × MOPP			
	Output - \perp			1 × MOPP			
Operating Temperature				-40	-	+85	°C
Storage Temperature				-40		+85	
Operating Humidity		Non-condensing		10		95	%RH
Storage Humidity				20		90	
Power Derating	Operating temperature derating	+45°C to +85°C	Air cooling	2	-	--	% / °C
		+50°C to +85°C	10CFM				
		-40°C to -30°C					
	Input voltage derating	85VAC-115VAC	Air cooling	1	-	--	% / VAC
	85VAC-100VAC	10CFM	2				
Safety Standard				Meet IEC/EN/UL62368-1/EN60335-1/IEC/EN61558-1/GB4943-1/IEC/EN60601-1/ES60601-1(3.1 version)/CAN/CSA-C22.2 No.60601-1:14-Edition 3/EN60601-1-2 Edition 4			
Safety Certification				IEC/EN/UL62368-1/EN60335/IEC61558(Pending)			
Safety Class				CLASS I (with PE and must be connected)/ CLASS II (without PE)			
MTBF		MIL-HDBK-217F@25°C		>300,000 h			
Warranty		Ambient temperature: <50°C		5 years			

Mechanical Specifications	
Case Material	Metal (AL1100, SGCC)
Dimensions	80mm × 62mm × 40mm
Weight	180g (Typ.)
Cooling Method*	Air cooling / 10CFM
Note: *Cooling method and power derating refer to typical characteristic curves.	

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 Element14.com/multicomp-pro

multicomp PRO

120W AC to DC Enclosed Switching Power Supply

multicomp PRO



Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032 CLASS B		
	RE	CISPR32/EN55032 (Category I, CLASS B, category II, CLASS A)		
	Harmonic current	IEC/EN61000-3-2 CLASS A		
Immunity	ESD	IEC/EN 61000-4-2	Contact $\pm 8\text{KV}$ /Air $\pm 15\text{KV}$	Perf. Criteria A
	RS	IEC/EN 61000-4-3	10V/m	Perf. Criteria A
	EFT	IEC/EN 61000-4-4	$\pm 2\text{KV}$	Perf. Criteria A
	Surge	IEC/EN 61000-4-5	line to line $\pm 2\text{KV}$ /line to ground $\pm 4\text{KV}$	Perf. Criteria A
	CS	IEC/EN61000-4-6	10 Vr.m.s	Perf. Criteria A
	Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	0%, 70%	perf. Criteria B



Note: 1.*The power supply should be considered as a part of the components in the system. All EMC performance are been tested on a metal plate with a thickness of 1mm and a length of 360mm x 360mm. The power supply must be combined with the terminal equipment for electromagnetic compatibility confirmation;

2.*Category I products with PE (Which must be connected), category II products without PE.

Product Characteristic Curve

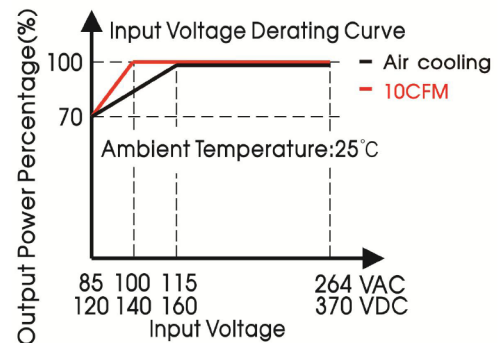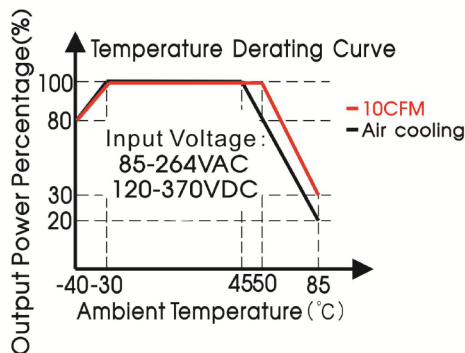


Note: With an AC input voltage between 85 - 115VAC and a DC input between 120 - 160VDC the output power must be derated as per the temperature derating curves.

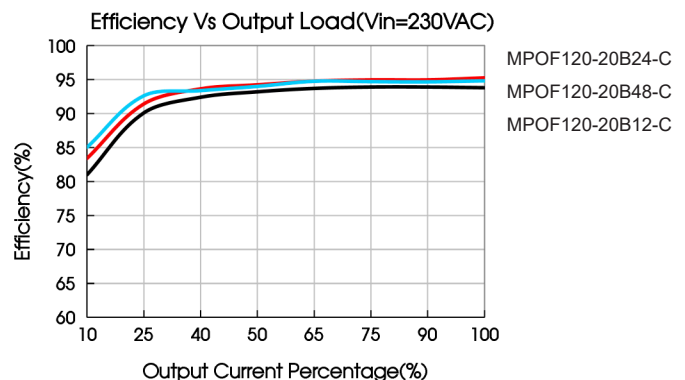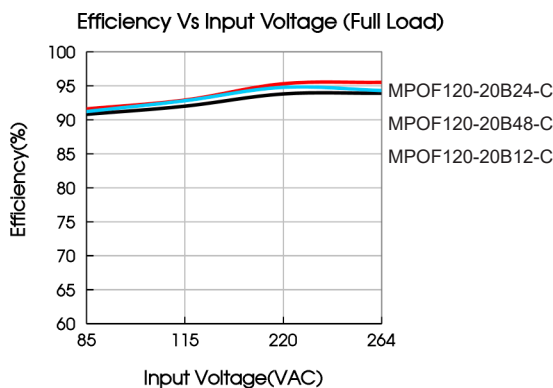

120W AC to DC Enclosed Switching Power Supply

multicomp PRO

Dimensions and Recommended Layout

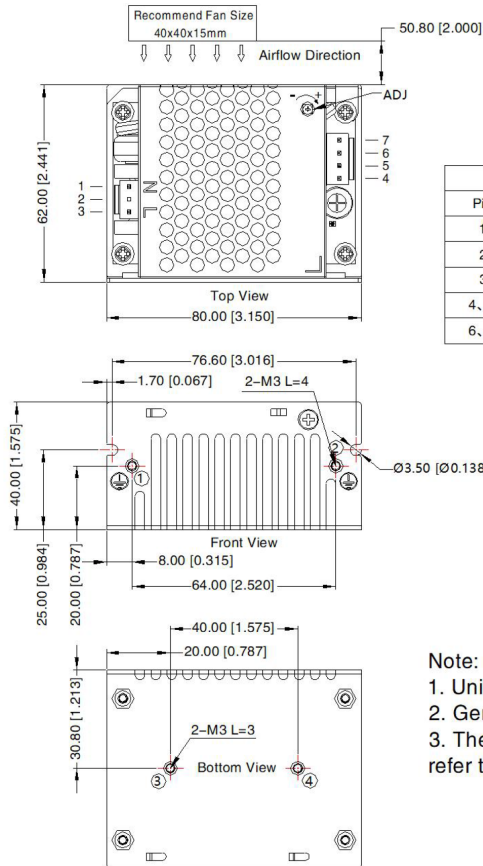


THIRD ANGLE PROJECTION



Pin-Out			
Pin	Function	Product Connector	Customer Connector
1	AC(N)	JST B3P-VH or equivalent	Housing: JST VHR Contact: JST SVH-21T-P1.1 or equivalent
2	NC		
3	AC(L)		
4, 5	-Vo	JST B4P-VH or equivalent	Housing: JST VHR Contact: JST SVH-21T-P1.1 or equivalent
6, 7	+Vo		

Position	Screw Spec.	L(max)	Torque(max)
①-②	M3	4mm	0.4N-m
③-④	M3	3mm	0.4N-m



Note:

1. Unit: mm[inch]
2. General tolerances: $\pm 1.00[\pm 0.039]$
3. The layout of the device is for reference only, please refer to the actual product

Notes:

1. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75% RH with nominal input voltage and rated output load;
2. All index testing methods in this datasheet are based on our company corporate standards;
3. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. The out case needs to be connected to PE () of system when the terminal equipment in operating;
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
8. CAUTION: Double pole, neutral fusing. Disconnect mains before servicing."/>"ATTENTION: Double pôle/fusible sur le neutre. Débrancher l'alimentation avant l'entretien;
9. The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp PRO