


MORSETTIERE PER C.S.
 TERMINAL BLOCKS FOR P.C.B.
 BARRETTES DE CONNEXION POUR C.I.
 ANSCHLUBKLEMMEN FÜR LEITERPLATTE

TIPO
 TYPE
 TYPE
 TYP

MRT22V01

PASSO
 PITCH
 PAS
 RASTERMAß

3,81 mm

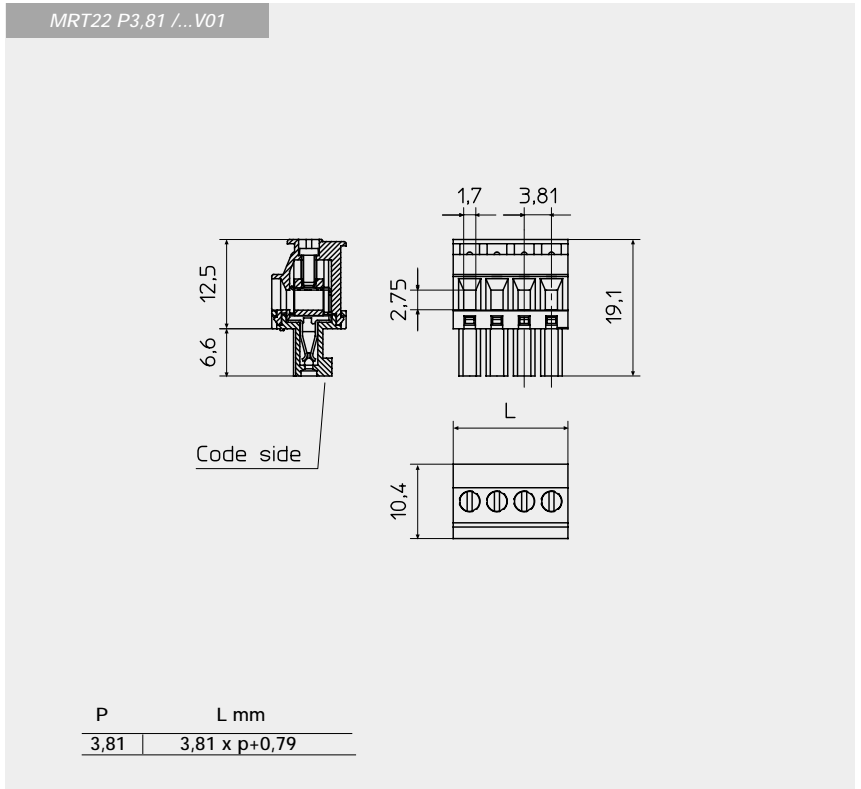

CONNETTORE FEMMINA
 A MODULI

FEMALE CONNECTOR
 MODULES

CONNECTEUR FEMELLE
 ELEMENTS

BUCHSENLEISTE
 ANREIHBAR



Corpo isolante Verde	Insulating body Green	Corps isolant Vert	Isolierkörper Grün	
Vite	Screw	Vis	Schraube	PA68 UL94V0
Morsetto	Clamp	Borne	Klemmkörper	M2-CB4FF+Zn
Contatto	Pin	Contacte	Kontakt	Cu Zn40 Pb2+Ni
Coppia di torsione	Testing torque	Couple de serrage	Zul. Drehmoment	CuSn7+Ni
Sezione	Section	Section	Querschnitt	0,3 Nm
Vite imperdibile	Captive screw	Vis imperdable	Schraube unvelierbar	1 mm ² (16-30 AWG)
Foro di montaggio	P.C.B. mounting hole	Perçage C. I.	Leiterplattenbohrung	-
Corrente nominale	Nominal current	Courant nominal	Strombelastbarkeit	10 A (8 A)
Tensione	Voltage	Tension	Betriebsspannung	130/450 V (300 V)
Temperatura	Temperature	Température	Temperatur	110°C
Grado di protezione	Protection index	Degré de protection	Schutzklasse	IP00
Resistenza di isolamento	Insulation resistance	Résistance d'isolement	Isolationswiderstand	≥ 5 MΩ
Rigidità dielettrica	Dielectric strength	Rigidité diélectrique	Durchschlagsfestigkeit	≥ 1250 Vac/60"

Ref. EN 60998-1 (Ref. UL1059)

ORDER
 SCHEME

P	p		
Passo	N° di Poli	Colori	Numerazione
Pitch	Nr. of Poles	Colors	Printing
Pas	Nb. Pôles	Couleurs	Marquage
Rastermaß	Polzahl	Farbe	Bedruckung

MIN 2=MAX 20



MRT22

P 3,81 / ...

N