


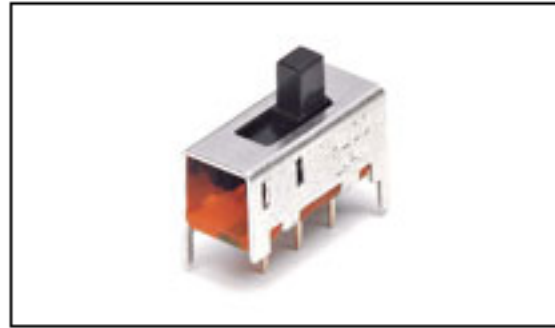

1825268-2 Product Details

[Share](#) | [Print](#) | [Email](#)


1825268-2
(MSS4300RG04)
TE Internal Number: 1825268-2
 Active

Slide Switches

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- 3 Positions
- Four Pole - Three Throw Configuration (Pole-Throw)
- Actuator Style = Extended, Side
- Actuator Color = Black
- MSS Series

[View all Features](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- [SLIDE SWITCH, MSS 4300R SERIES \(PDF, English\)](#)

Catalog Pages/Data Sheets:

- [SWITCHES_CORE_PROGRAM_CATALOG \(PDF, English\)](#)

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Actuator Style = Extended, Side
- Series = MSS
- Mount Angle = Vertical
- Terminal Configuration = Standard
- Grade = Instrumentation
- Termination Type = PC
- PCB Mount Retention = With

Electrical Characteristics:

- Contact Rating = 300mA @ 125 VAC

Dimensions:

- Actuator Length (mm [in]) = 4.20 [0.165]

Body Features:

- Number of Positions = 3
- Actuator Color = Black
- Mount Style = Through-Hole
- PCB Tail Length (mm [in]) = 3.00 [0.118]
- PCB Mount Retention Type = Guide Posts
- Actuator Material = Polyester

Contact Features:

- Contact Plating = Gold

Housing Features:

- UL Flammability Rating = UL 94-HB

Configuration Features:

- Configuration (Pole-Throw) = Four Pole - Three Throw
- Threaded Case = Without
- Number of Actuators = Single

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 260°C, Wave solder capable to 240°C, Wave solder capable to 265°C
- [RoHS/ELV Compliance History](#) = Always was RoHS compliant

Identification Marking:

- Stamped Marking = With

Other:

- Brand = Alcoswitch

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)

Quick Links

- [Check Distributor Inventory](#)
- [Cross Reference Products](#)
- [Find Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Search Knowledge Base](#)
- [Manage Your Account](#)

Keep Me Informed

Receive TE News, Events & Technology Updates

