


MTMM-108-07-F-D-350



MTMM-124-15-T-S-650

**MTMM SERIES**

**(2.00 mm) .0787"**

# MODIFIED THROUGH-HOLE HEADER

## SPECIFICATIONS

For complete specifications see [www.samtec.com?MTMM](http://www.samtec.com?MTMM)

**Insulator Material:** Black Liquid Crystal Polymer

**Terminal Material:** Phosphor Bronze

**Plating:** Sn or Au over

50 μ" (1.27 μm) Ni

**Operating Temp Range:** -55 °C to +105 °C with Tin;

-55 °C to +125 °C with Gold

**RoHS Compliant:** Yes

**Lead-Free Solderable:** Yes

Yes


**Board Mates:**

CLT, SQT, SQW, ESQT, TLE, SMM, MMS

**Cable Mates:**

TCSD

Choice of single, double or quad row

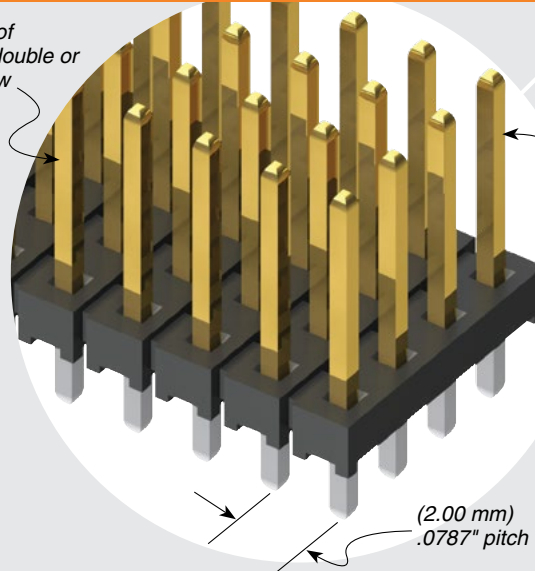

Specify post height in (0.13 mm) .005" increments

(2.00 mm) .0787" pitch

## RECOGNITIONS

For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)



FILE NO. E111594

## ALSO AVAILABLE (MOQ Required)

- Other platings
- Contact Samtec.

MTMM	1 NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	POST HEIGHT	OPTION
	01 thru 50	Specify LEAD STYLE from chart.	-F = Gold flash on post, Matte Tin on tail -L = 10 μ" (0.25 μm) Gold post, Matte Tin on tail -T = Matte Tin	-S = Single Row -D = Double Row -Q = Quad Row	- "XXX" = Post Height in inches (0.13 mm) .005" increments Example: -070 = (1.78 mm) .070"	- "XXX" = Polarized Position Specify position of omitted pin

LEAD STYLE	OAL
-02	(6.48) .255
-03	(7.67) .302
-04	(8.20) .323
-05	(9.58) .377
-06	(10.08) .397
-07	(11.58) .456
-08	(12.09) .476
-09	(13.59) .535
-10	(14.10) .555
-11	(15.09) .594
-12	(15.60) .614
-13	(17.09) .673
-14	(19.08) .751
-15	(21.08) .830

**Note:** This Series is non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.