

Type MXG Subminiature Medium Time Delay Fuse



www.optifuse.com (619) 593-5050

Agency Standards and Listings:



Time Characteristics:

100%	4h	Min.
200%	20s	Max.

Interrupt Rating:

200mA~10A 50A at 250VAC


Packaging in Bulk:

No suffix – ammo pack – 4000 pcs
TR suffix – Tape and Reel – 4000 pcs, EIA-296

Part number:

MXG-XX – Ammo pack
MXG-XX-TR – Tape and Reel

Mechanical Dimensions: Inches[mm]

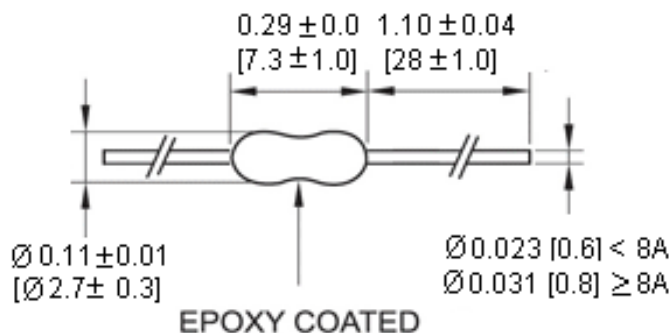

Part Number	Amperage	Agency Approval				I ² T Reference A ² Sec.	Rated Voltage (VAC)
		CCC	CQC	UL(CUL)	CSA		
MXG-200mA	200mA	•		•	•	0.0179	250V
MXG-250mA	250mA	•		•	•	0.0205	
MXG-300mA	300mA			•	•	0.0333	
MXG-315mA	315mA	•		•	•	0.0353	
MXG-350mA	350mA					0.0583	
MXG-375mA	375mA			•	•	0.098	
MXG-400mA	400mA			•	•	0.141	
MXG-500mA	500mA	•		•	•	0.208	
MXG-600mA	600mA			•	•	0.322	
MXG-630mA	630mA	•		•	•	0.328	
MXG-750mA	750mA			•	•	0.606	
MXG-800mA	800mA	•		•	•	0.933	
MXG-1A	1A	•		•	•	1.290	
MXG-1.2A	1.2A			•	•	1.613	
MXG-1.25A	1.25A	•		•	•	1.663	
MXG-1.5A	1.5A			•	•	1.922	
MXG-1.6A	1.6A	•		•	•	1.940	
MXG-2A	2A	•		•	•	4.608	
MXG-2.5A	2.5A	•		•	•	5.409	
MXG-3A	3A			•	•	9.248	
MXG-3.15A	3.15A	•		•	•	9.595	
MXG-3.5A	3.5A			•	•	10.12	
MXG-4A	4A	•		•	•	30.75	
MXG-5A	5A		•	•	•	43.81	
MXG-6A	6A			•	•	56.22	
MXG-6.3A	6.3A		•	•	•	60.38	
MXG-7A	7A			•	•	65.17	
MXG-8A	8A			•	•	72.94	
MXG-9A	9A			•	•	83.42	
MXG-10A	10A			•	•	90.79	

• for Approved

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of Fuse device with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.


Rev C 02/2014 - Page: 1/2
Code: H01-01H

Type MXG
Subminiature
Medium Time Delay Fuse



www.optifuse.com (619) 593-5050

Time Current Curve Graph

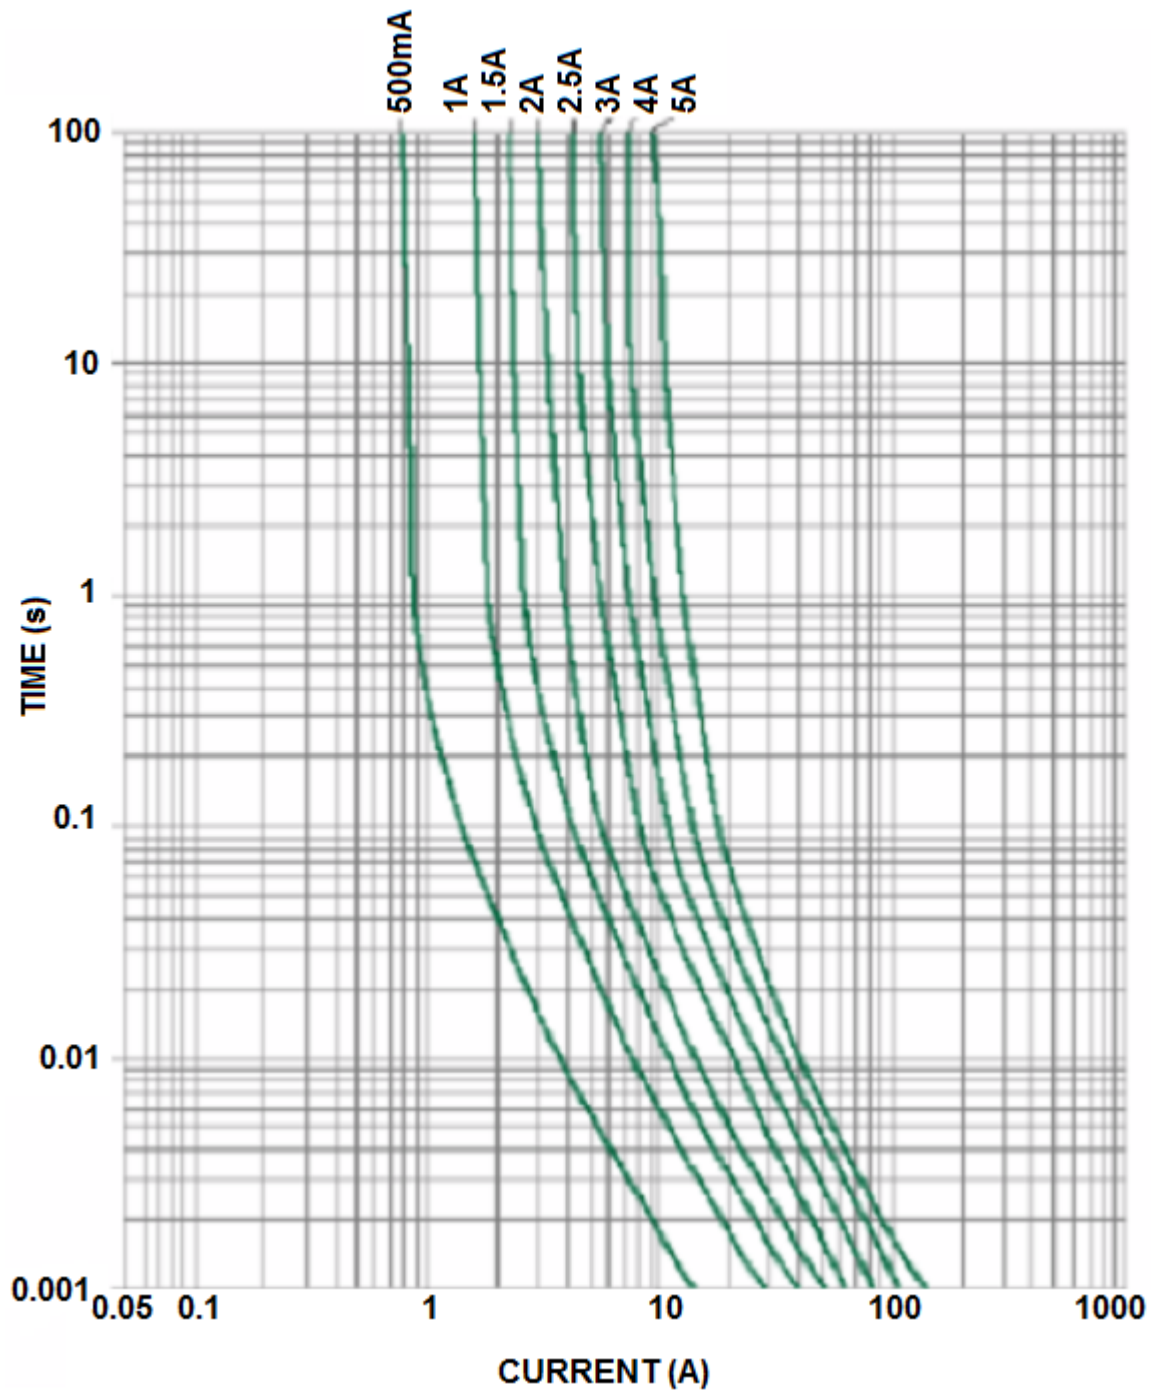

Note: All specifications subject to change without notice.

Rev C 02/2014 - Page: 2/2
Code: H01-01H