



QUEST CABLING SOLUTIONS CAT6A 550MHZ FTP 60°C ISO/IEC 11801& EN50288 & ANSI/TIA-568.2
ETL/3P VERIFIED - 24AWGX4P PATCH TYPE CMR ROHS

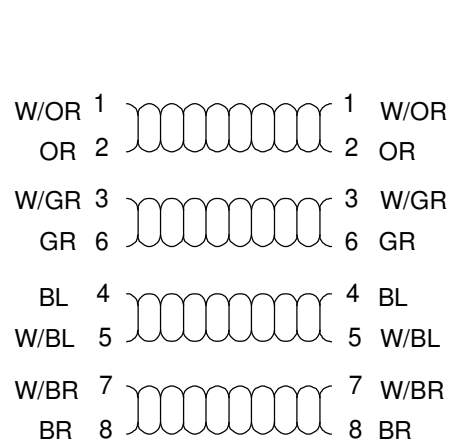


Insulation:HDPE
1.05±0.02
Conductor:
7C/0.20BC±0.02BC

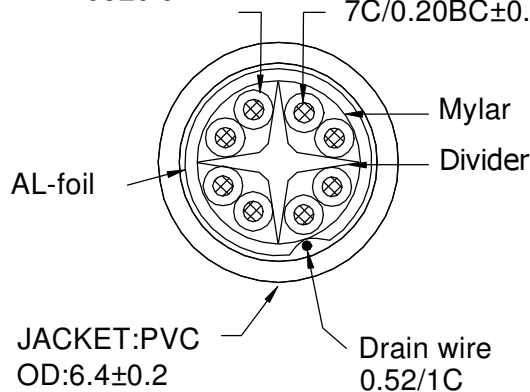

NPC-8XXX
LENGTH
COLOR

COLOR(X)	
BLUE	2
GRAY	9

Length: 3', 7', 10', 15', 25'

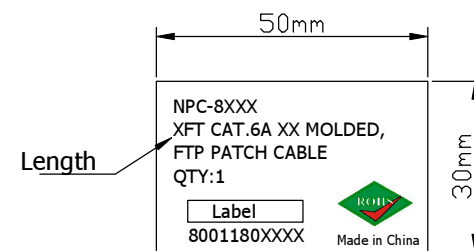

9				
8				
7				
6				
5				
4				
3	60P PVC XXXX MOLDED	12	g	
2	8P8C MALE GOLD PLATED PIN 50U"	2	pcs	
1	CABLE:(7C/0.20BC±0.02BC+HDPE0.88)*4P+DIVIDER+MYLAR+(1C/0.52TD)DRAIN WIRE+AL-FOIL(双面)+OD:6.4±0.2MM	1	pcs	
NO	Description	Q,TY	Unit	

Quest Technology Int'l, Inc. 11200 NW 138th St, Medley, FL 33178 Tel: 305-613-9593 Fax: 305-613-9676 www.questtechnology.com				DESCRIPTION	CAT6A FTP PATCH CORD	SCALE	FIT	UNITS:MM	3RD ANGLE
				MODEL NO	NPC-8XXX				
APPROVED	CHECKED	DRAWING	DESIGNED	DRAWING NO	SRT6A-M45-XX-XX				
Wxp Wxp David Feng David Feng				FINISHING			2014.05.09		A1
				MATERIAL		SYM	DATE		REVISION